

Steel fire-proof door & frame is made of cold-rolled steel. The door is insulated with fire-proof material, with its hardware meeting fire-proof, integrity and insulation requirements.

Specifications:

A: fire-proof material filled.


B: normally used with door closer.

C: hardware fire-rating temp. $\geq 950^{\circ}\text{C}$.

D: only available in outswing opening.

E: frame should be installed with fire-proof rubber seal.

F: door steel skin: 0.8-1.0mm. Frame steel: 1.2-1.5mm.

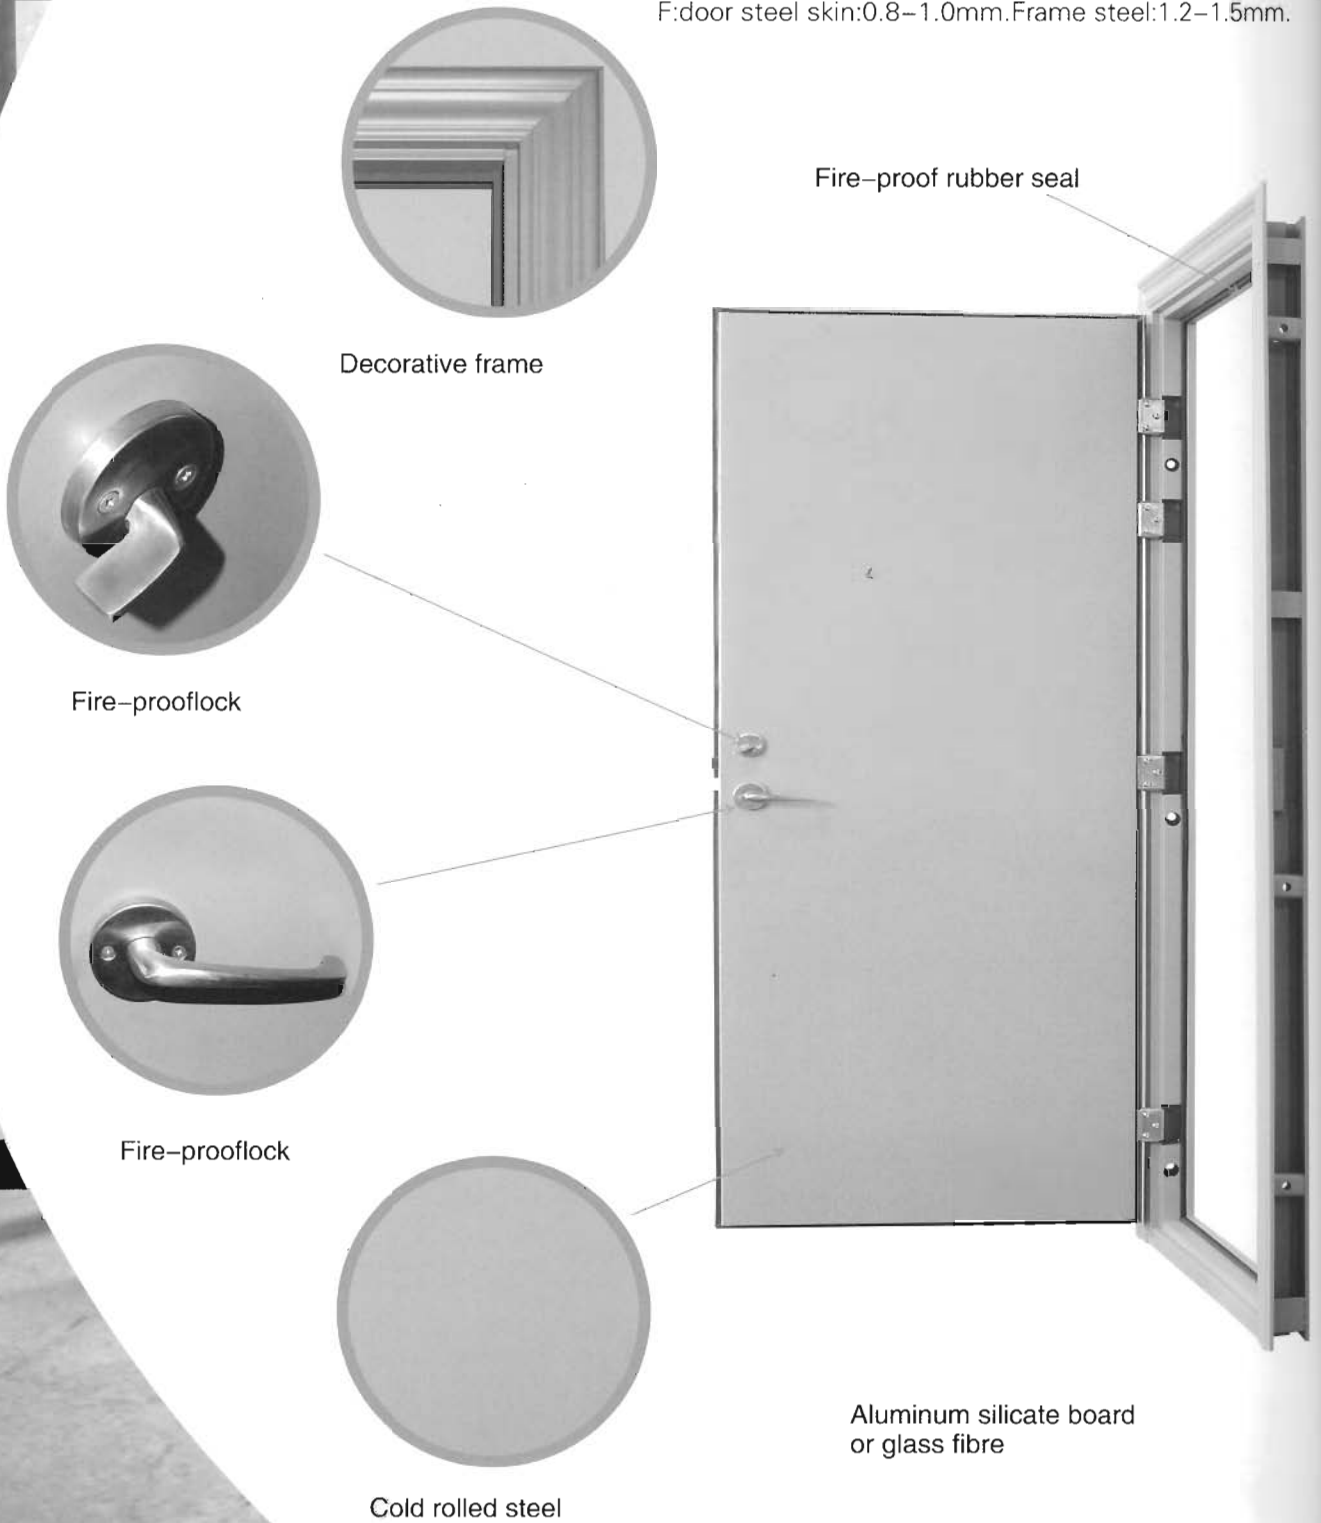

Fire-proof rubber seal

Decorative frame

Fire-prooflock

Fire-prooflock

Cold rolled steel

Aluminum silicate board
or glass fibre