


Typ / Type : R 125		Art.-Nr. / Art.-No. : F00-12582	
U	230V (50Hz)	Δpfa min	-- Pa
P1	0.028 kW	ΔI	-- %
IN	0.12 A	IA / IN	1.7
n	2620 min-1	▲	IP44
C400V	1 μF	★	01.009
tR	70 °C	■	2.1 kg


LWArel A-bewertet bei V=0,5*Vmax LWArel A-weighted at V=0,5*Vmax	fM [Hz]						
	125	250	500	1K	2K	4K	8K
LWA2 [dB(A)] Gehäuse / casing	31	34	33	32	32	23	18
LWA5 [dB(A)] Ansaugseite / inlet side	40	48	49	48	45	36	27
LWA6 [dB(A)] Ausblasseite / outlet side	40	47	50	50	47	39	29

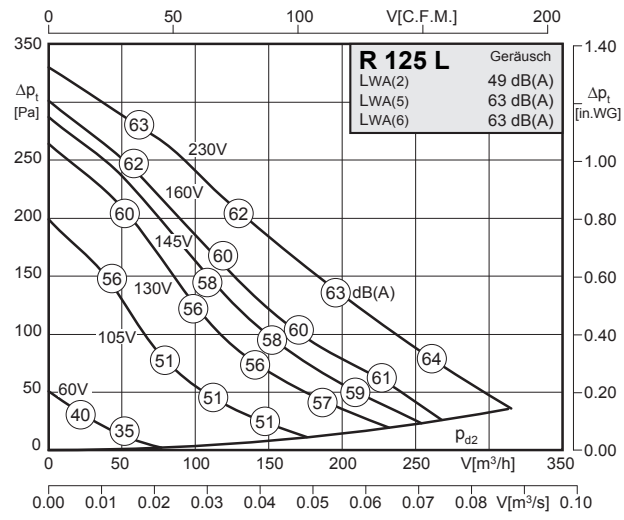

Typ / Type : R 125 L		Art.-Nr. / Art.-No. : F00-12587	
U	230V (50Hz)	Δpfa min	-- Pa
P1	0.065 kW	ΔI	-- %
IN	0.30 A	IA / IN	1.5
n	2480 min-1	▲	IP44
C400V	2 μF	★	01.009
tR	70 °C	■	2.6 kg

LWArel A-bewertet bei V=0,5*Vmax LWArel A-weighted at V=0,5*Vmax	fM [Hz]						
	125	250	500	1K	2K	4K	8K
LWA2 [dB(A)] Gehäuse / casing	36	42	42	43	43	36	28
LWA5 [dB(A)] Ansaugseite / inlet side	48	53	56	59	56	52	43
LWA6 [dB(A)] Ausblasseite / outlet side	47	55	56	58	56	53	42

R 125



R 125 L

