


TECHNICAL FEATURES

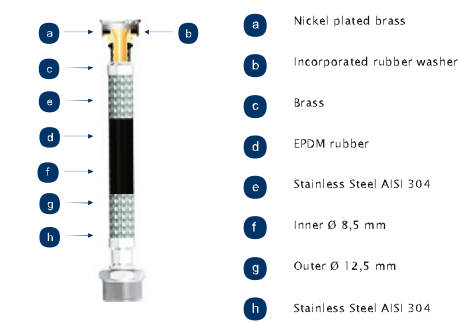

TECHNICAL DATA

DN 8

	Nominal flow at 3 bar	32 l/min
	Minimum curvature radius	26 mm
	Operating pressure	20 bar
	Maximum temperature	110°C
	Drinking H2O	Yes
	Food use	Yes
	Fitting inner diameter	5,9 mm

Information concerning flow rate is only for guidance and depends on connector length and end-fittings.

END FITTINGS

M 1/2"		H 1/2"		H 1/2"		C 1/2"	
M 3/8"		H 3/8"		M 1/2"		C 1/2"	
M 3/8"		H 1/2"		H 3/8"		C 1/2"	
M 1/2"		H 3/8"		M 3/8"		C 1/2"	
M 1/2"		H 1/2"		H 1/2"		C 3/8"	
M 3/8"		H 3/8"		M 1/2"		C 3/8"	
M 3/8"		H 1/2"		H 3/8"		C 3/8"	
T 10		M 1/2"		M 3/8"		C 3/8"	
T 10		H 1/2"		H 3/4"		C 3/4"	
T 10		M 3/8"		C 1/2"		C 1/2"	
T 10		M 3/8"		C 3/8"		C 3/8"	
T 10		T 10		C 1/2"		C 3/8"	

M: Male H: Female C: Elbow T: Smooth Tube

For other combinations, please ask.

APPROVALS

	AENOR Spain		ETI Hungary
	CSTB France		ETI-SZÚ Czech Republic
	KIWA Netherlands		SKTC Slovakia
	SVCW Switzerland		COST Russian Fed.
	INSTAL Poland		SABS South Africa

APPLICATIONS



Sanitary installations: wash-basins, bidets, WC suites, faucets, coffee machines, water heaters.