

LG THERMA V PRODUCT CATALOGUE

2021 - 2022







www.lg.com http://partner.lge.com







INDEX THERMA V. **INTRODUCTION** HEAT PUMP TECHNOLOGY THERMA V INTRODUCTION WHAT IS LG THERMA V **FEATURES PRODUCTS** MONOBLOC

LG BUSINESS PARTNERSHIP & 004 PRE-SALES/ENGINEERING TOOLS 010 012 014 LG AIR TO WATER HEAT PUMP SOLUTION OVERVIEW 016 THERMA V LINE-UP OVERVIEW 018 THERMA V LINE-UP INTRODUCTION 020

FEATURE OVERVIEW	028
EXCELLENT PERFORMANCE & EFFICIENCY	030
USER CONVENIENCE	032
EASY INSTALLATION & MAINTENANCE	035

R32 MONOBLOC S	038
R32 MONOBLOC	054

HYDROSPLIT

R32 HYDROSPLIT HYDRO BOX	070
R32 HYDROSPLIT IWT	080

SPLIT

R32 SPLIT HYDRO BOX	090
R32 SPLIT IWT	098
R410A SPLIT HYDRO BOX	108
HIGH TEMPERATURE	118

WATER HEATER

HEAT PUMP WATER HEATER 126

ACCESSORIES

ACCESSORIES PROVIDED BY LG	140
LG WI-FI MODEM	144
DOMESTIC HOT WATER TANK	145
COMBINIED TEST WITH DHIM TANK	1/16




LG BUSINESS PARTNERSHIP & PRE-SALES/ENGINEERING TOOLS

European Business Infrastructure

LG Electronic's European Air Solution department is committed to ensuring your business success. With 16 pan-European sales offices and academies, we want deliver on our promise of support, efficiency and proactivity throughout each stage of our business partnership.

Our highly competitive products are delivered through our dedicated European distribution centre to ensure a steady and reliable supply of inventory.

At our European Energy Lab, LG Business Solutions is developing heat pump technology that is optimized for the varied European climates and weather patterns along with continuous product performance verification.

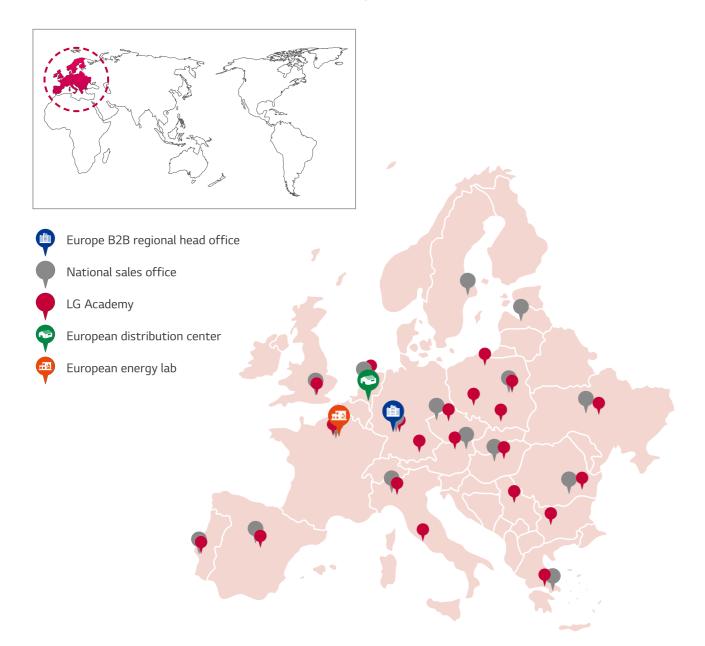

LG BUSINESS
PARTNERSHIP &
PRE-SALES/
ENGINEERING
TOOLS

HEAT PUMP TECHNOLOGY THERMA V INTRODUCTION LG AIR TO WATER HEAT PUMP SOLUTION

OVERVIEW

THERMA V LINE-UP OVERVIEW THERMA V LINE-UP INTRODUCTION

Pre-sales/Engineering Tools


LG provides a variety of software to support THERMA V for all customers including designers, installers, and end users.

WHAT IS

LG THERMA V

1. LG THERMA V SELECTOR

The LG THERMA V Selector is a mobile application for designers, installers and end users, which provide various real-life simulations. An energy simulation can quickly indicate energy consumption and cost as well as CO_2 emission values that can be vastly reduced from conventional heating systems using minimal input values. With both model selection and energy simulation tools, quick and accurate selection is made possible with detailed input values such as desired system configuration, required heating and domestic hot water (DHW) load, which will calculate payback, result in a faster energy simulation and generate cost comparisons. Sound level can also be calculated through simulations based on the installation environment.



2. LATS THERMA V

LATS THERMA V IS a PC-based model selection program of LG THERMA V products, enabling an accurate and quick selection of the most suitable model in each end-user environment. In addition to model selection, faster energy simulation and cost comparison to other system is possible. Furthermore, customer is easily able to simulate payback comparing conventional system such as gas boiler, electric boiler by using LATS THERMA V.


* LATS THERMA V is available on the LG Partner portal.

3. LGMV

LGMV is a useful engineering tool that monitors THERMA V's real-time refrigerant and water cycle. It assists installers with effective and efficient start-up and commissioning after the THERMA V installation. LGMV enables service/field engineers to detect the errors and troubleshooting for fast and reliable problem solving.

* LGMV is available on the LG Partner portal.





THERMA VI

THERMA V SELECTOR



How to install?


Search "LG Energy Payback" in Google Play Store or Apple App Store.

URL: https://play.google.com/store/apps/details?id= com.lg.smartinverterpayback




URL: https://apps.apple.com/us/app/id1339037884



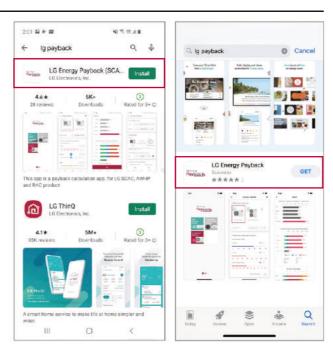

THERMA V THERMA V LG BUSINESS HEAT PUMP WHAT IS LG AIR TO THERMA V PARTNERSHIP & INTRODUCTION LG THERMA V WATER LINE-UP LINE-UP PRE-SALES/ **HEAT PUMP** OVERVIEW INTRODUCTION **ENGINEERING** SOLUTION TOOLS OVERVIEW

Simulation Mode

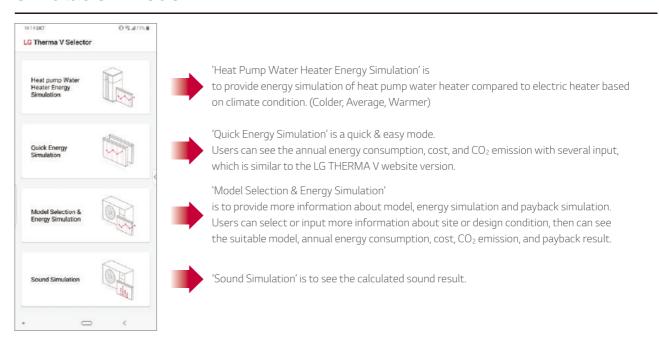

Model Selection & Energy Simulation

Before choosing an air to water heat pump, many customers wonder how much energy costs can be saved compared to conventional heating systems, and how to select a product with the right capacity for the home. The LG THERMA V selector allows you to calculate annual energy costs and payback periods as well as model selection through sophisticated simulations through simple input values.

- City selection
- Building area input
- Operation mode selection
- Load input
- 3:18 SKT E @ ← Country : Austria 0.0 2. Select the operation mode O Heating only O Heating + DHW O DHW only O Cooling + DHW Cooling + Heating + DHW 3. Input the load 2.0
- Operation period selection
- Model type selection

- ← Country : Austria

(RE)


0


220-240, 1, 50 😾

- 0
- 6. Select the load design condition

- Design condition input
- System selection to be
- Costs input for systems
- Searching model that meets

○型域(7%)食





O # 467% 8

THERMA VI

THERMA V SELECTOR


Result & Report

After the simulation, analysis results including initial investment cost, annual energy consumption, and payback period can be checked in the form of various graphs. Moreover, this report is provided in PDF format and can be shared by e-mail and messenger.


Result


- Simulation conditions summary
- Initial cost
- Annual energy consumption





- Annual cost
- 10-year LCC analysis
- Annual CO₂ emission
- 10-year LCC analysis
- Payback year - 15-year LCC analysis graph



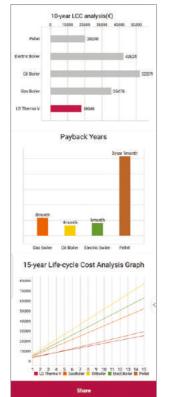

Report


- Cover page

Project Name

- Site information & design condition - Product specification
 - Life cycle cost

1 1 5,00

- Annual energy consumption - Drawings



Sound Simulation

HEAT PUMP

TECHNOLOGY

Consumers are also wondering how much sound level will be after installing the Air to Water Heat Pump product. Using the sound simulation function of THERMA V selector, you can predict the expected sound pressure values in the daytime and nighttime according to the installation distance and conditions.

WHAT IS

LG THERMA V

THERMA V

OVERVIEW

LINE-UP

THERMA V

INTRODUCTION

LINE-UP

LG AIR TO

HEAT PUMP

SOLUTION

OVERVIEW

WATER

- Model selection

LG BUSINESS

PRE-SALES/

TOOLS


ENGINEERING


PARTNERSHIP &

- Distance input
- Solid angle selection
- Reference for solid angle selection

THERMA V

INTRODUCTION



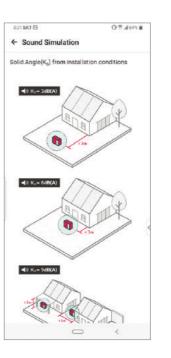



^{*} The image above is a simulation example in case of R32 Silent Monobloc in low noise mode.

HEAT PUMP TECHNOLOGY


LG Electronics leads the way in heat pump technology

As a leading HVAC supplier, LG's heating product portfolio comprises a wide range of highly energy efficient renewable energy systems, providing the right heating solution for any requirement and building.

What is a Heat Pump System?

Modern Technology to Replace Conventional Boilers


Historically, conventional heating systems have used either oil or gas or have been direct electric heaters. In such conventional heating systems, environmental aspects such as fossil fuel use and environmental pollution have been overlooked. In recent years, interest in these environmentally friendly devices has been increasing and in order to meet these market demands, LG has further developed their heat pump technology to produce the most efficient, environmentally friendly products in the industry.

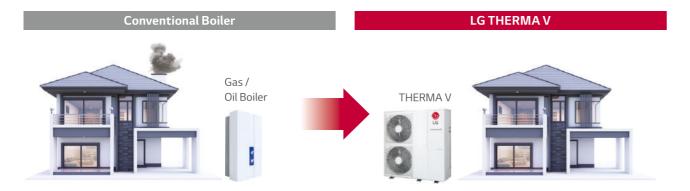

Modern Technology for Renewable Energy

The term "heat pump" refers to a technique that pumps heat from renewable energy sources, like the air, ground and water. A heat pump device transforms this energy into a usable heat source via the refrigerant cycle

With heat pump technology like THERMA V, about 75% ¹⁾ of the energy needed to produce heating and hot water in home comes from natural air source.

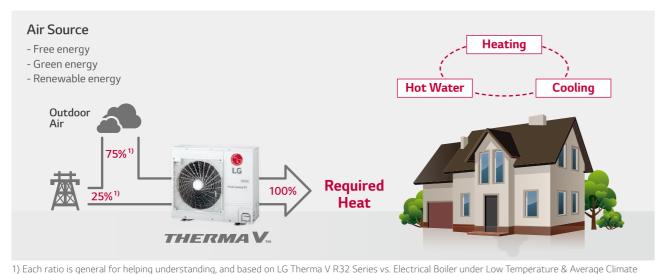

conditions, so, it may differ from actual operation.


LG BUSINESS HEAT PUMP
PARTNERSHIP & TECHNOLOGY
PRE-SALES/
ENGINEERING
TOOLS

THERMA V WHAT IS
INTRODUCTION LG THERMA V

LG AIR TO
WATER
HEAT PUMP
SOLUTION
OVERVIEW

THERMA V LINE UP OVERVIEW THERMA V LINE UP INTRODUCTION

How do Air to Water Heat Pumps Work?

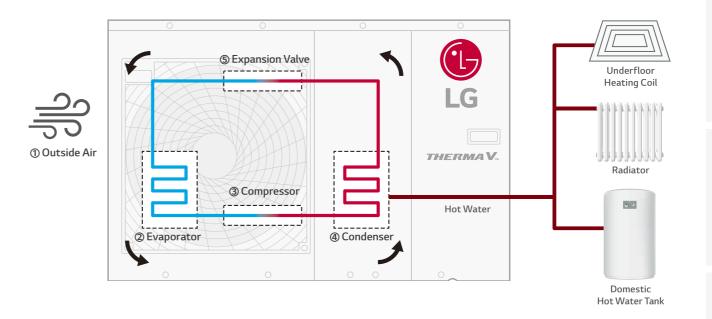

① Outside Air

Heat is extracted from the outside air.

② Evaporator

As low temperature liquid refrigerant absorbs heat energy from the air, it transforms from liquid to vapor phase.

③ Compressor

The vaporized refrigerant flows into the compressor. The electric energy used to operate the compressor is converted into heat and added to the refrigerant.

Condenser

High temperature refrigerant gas flows into the heat exchanger and conveys heat energy to water by the heat exchanged between refrigerant and water.

⑤ Expansion Valve

High-pressure liquid refrigerant flows through the expansion valve to restore the refrigerant to its original condition.

THERMA V. INTORDUCTION

PARTNERSHIP & PRE-SALES/ ENGINEERING TOOLS

HEAT PUMP TECHNOLOGY THERMA V INTRODUCTION

LG AIR TO WHAT IS LG THERMA V WATER HEAT PUMP SOLUTION

OVERVIEW

THERMA V LINE-UP OVERVIEW

THERMA V LINE-UP INTRODUCTION

The Green Choice:

THERMA V_{IM}

Discover the ultimate eco-conscious, energy efficient and convenient heating solution

Today's informed consumer will consider multiple factors when choosing a heating solution, like an Air to Water Heat Pump (AWHP) to include user-friendliness, reliability and regulation-compliance. European consumers are the most subject to shifting regulations year after year.

As a solution to the modern requirements, R32 refrigerant takes centre stage for a new smart solution. With a 68% reduced Global Warming Potential (GWP) from the current refrigerant, R410A, R32-applied products are not only eco-conscious but also meet the consumers' needs for energy efficiency, performance and more. LG Electronics' THERMA V R32 AWHP line-up fulfills both European regulations as well as customer needs.



- Ultimate Energy Efficiency: A+++ in the ErP energy labelling regulation, wide operation range, reduced noise level
- Excellent Performance: R1 Compressor embedded, high heating capacity at low ambient temperature

• User Convenience: LG ThinQ Wi-Fi control, convenient scheduler, wider connectivity, energy monitoring

THERMA V.

WHAT IS LG THERMA V?

LG's Advanced Heating Technology

The LG THERMA V air to water heat pump system has been specially designed to provide a space and domestic hot water solution to both new build and renovated homes. Even more remarkable thing is LG's advanced heating technology, market leading technology that can minimize energy consumption more than any other solution in the market.



Space Heating

The wide span THERMA V systems with high efficiency can cover heating loads of various types of houses.


Domestic Hot Water

As the hot water efficiency becomes more and more important, THERMA V can provide an optimized solution for this.

Space Cooling

THERMA V is a single device that can also provide a cooling solution besides the heating and hot water provided by boilers.

High Efficiency and Low CO₂ Emission

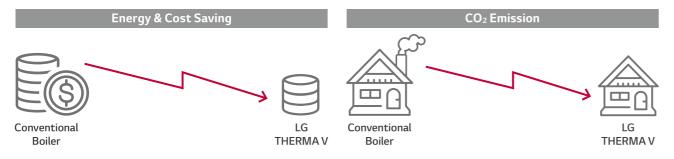

LG BUSINESS PARTNERSHIP & PRE-SALES/ **ENGINEERING TOOLS**

HEAT PUMP TECHNOLOGY THERMA V INTRODUCTION

WHAT IS LG THERMA V

THERMA V LG AIR TO LINE-UP **HEAT PUMP** OVERVIEW SOLUTION

THERMA V LINE-UP INTRODUCTION

Benefits of LG THERMA V



For Homeowners

- Energy saving by utilizing renewable energy and high efficiency equipment
- Multiple solutions with space heating, cooling and DHW supply
- Economic support through domestic renewable heat incentive programme
- Save investment cost thanks to the compatibility with existing heating system like radiator, boiler, etc.

WATER

OVERVIEW

- Save valuable machine room space with the small footprint



For Installers & Designers

- Time saving with features for guicker installation and commissioning
- Excellent heating performance even at low ambient temperature
- Less manpower for handling with the compact size and light weight
- Low repair cost and high reliability with durable equipment
- Same controller interface for all LG products, requiring less training



For End-users

- Energy saving by utilizing renewable energy and high efficiency equipment
- Multiple solutions with space heating, cooling and DHW supply
- Low repair cost and high reliability with durable equipment
- Various user convenient functions
- No disturbing to neighbors with low noise
- Convenient control by user-friendly remote controller
- Remote connectivity for control and monitoring via LG ThinQ

LG AIR TO WATER HEAT PUMP SOLUTION OVERVIEW

				11.			
		Mone	obloc	Hydro Hydro Box (Wall hung)	osplit IWT (Integrated Water Tank)		
			**************************************		(integrated violatinally)		
		R32 Monobloc S	R32 Monobloc	R32 Hydrosplit Hydro Box	R32 Hydrosplit IWT		
Line-up		1Ø : 5/7/9/12/14/16 kW 3Ø : 12/14/16 kW	1Ø : 5/7/9/12/14/16 kW 3Ø : 12/14/16 kW	1Ø : 12/14/16 kW 3Ø : 12/14/16 kW	1Ø : 12/14/16 kW 3Ø : 12/14/16 kW		
		0 0	0 0	. 0	0		
Application		Heating, Coo	ing and DHW	Heating, Cooling and DHW	Heating, Cooling and DHW		
Energy Label		Space Heating 55°C A***	35°C A*** 55°C A** 55°C A* 1) A* 5/7/9 kW A 12/14/16 kW 2) A* 5/7/9 kW	35°C A*** Space Heating 55°C A**	Space Heating Space Heating Space Heating Space Heating Profile L A*		
Operation Range	Outdoor Air	-25 ~ 35°C	-25 ~ 35°C	-25 ~ 35℃	-25 ~ 35°C		
(heating)	Leaving Water	15 ~ 65°C	15 ~ 65°C	15 ~ 65°C	15 ~ 65°C		
Customer Needs	Designer & Installer		nissioning time work) r IDU) nitial risk of refrigerant leak				
		- Easy and intuitive controls - Reliable operation and long	lifetime -	Remote control by smartphone Control integration between boiler and THERMA V	r		
	End-User				Necessity to install indoor unit in living space due to Insufficient machine room space		
LG Approach		- No refrigerant piping work - New interface (standard III Remote controller) - Interlocking operation with 3rd party boiler - High energy efficiency - Low noise mode operation with schedule se - LG ThinQ Wi-Fi Control solution - High corrosion resistance heat exchanger - Easy commissioning by PC tool (LG heating configurator)					
		- All in one concept		- Hydrosplit concept - All in one concept (Integrated DHW tar with indoor unit) - Hydrosplit concept - Sophisticated and harmonious exterior indoor unit - Provides an option to integrate buffer and DHW expansion tank into indoor u			
		- Economic support by incent	newable energy and high effici	- Hybrid operation wit	tion and commissioning		
Benefit		- Saving mechanical room spa	ce		- Use of valuable machine room space for private purpose		

•	•	•	•	•	•	•
LG BUSINESS	HEAT PUMP	THERMA V	WHAT IS	LG AIR TO	THERMA V	THERMA V
PARTNERSHIP &	TECHNOLOGY	INTRODUCTION	LG THERMA V	WATER	LINE-UP	LINE-UP
PRE-SALES/				HEAT PUMP	OVERVIEW	INTRODUCTIO
ENGINEERING				SOLUTION		
TOOLS				OVERVIEW		

		Split		Water Heater
Hydro Box	(Wall hung)	IWT (Integrated Water Tank)	Floor standing	Water Heater
			L' 8	
R32 Split Hydro Box	R410A Split Hydro Box	R32 Split IWT	High Temperature	LG Inverter Heat Pump Water Heater
1Ø:5/7/9 kW	1Ø : 12/14/16 kW 3Ø : 12/14/16 kW	1Ø : 5/7/9 kW	1Ø:16 kW	1Ø: 200 / 270L
0	- O-	0	0	
Heating, Cool	ing and DHW	Heating, Cooling and DHW	Heating and DHW	DHW
35°C A*** Space Heating 55°C A***	35°C A*** Space Heating 55°C A**	Space Heating Space Heating Space Heating Space Heating Space Heating Profile L A*	35°C A* Space Heating 55°C A*	200L 270L Profile L Profile L DHW Heating
-25 ~ 35°C	-25 ~ 35℃	-25 ~ 35°C	-25 ~ 35°C	-5 ~ 48°C
15 ~ 65°C	15 ~ 57°C	15 ~ 65°C	25 ~ 80°C	35 ~ 65°C
Eliminating the potential freezing a Using existing facilities (Convenue) Don't want to take the potential quiet operation		- Saving installation and commissioning time (All-in-one) - Where mechanical room is very limited - Saving installation space for buffer tank and expansion tank - Using existing facilities (Conventional boiler) ing - Low operation cost - Easy and intuitive control - Easy and intuitive control	Solution for poorly insulated or old house High DHW temperature to meet sanitary water regulation	- Using less installation space in the machine room and storage room - Short installation time - Convenience to check the operation - Convenient maintenance - Low operation cost - Sufficient warm water
- Remote control by smartphone - Control integration between box	iler and THERMA V	Reliable operation and lo Necessity to install indoor unit in living space due to Insufficient machine room space		- Quite operation - Easy control
- High energy efficiency - New interface (standard III Rem - High corrosion resistance heat e	- Stylish design - Top class energy efficiency - Powerful heating performance - Low noise operation - Smart control			
- Placing hydronic components in water piping in the mechanical r - Interlocking operation with 3rd	oom	- All in one concept (Integrated DHW tank with indoor unit) - Sophisticated and harmonious exterior of indoor unit - Provides an option to integrate buffer tank and DHW expansion tank into indoor units - Interlocking operation with 3rd party boiler	- Max. 80°C LWT by Cascade 2 stage compression (R410A - R134a) - Suitable for old radiator	
- Free of potential freezing risk ag - Energy saving by utilizing renew - Quick & easy installation and co - Economic support by incentive p	Interior with stylish design Energy saving with inverter technology Faster and warmer water heating Low noise Smart control with Wi-Fi by LG ThinQ			
- Multiple solution (heating, cooli - Hybrid operation with existing f		Multiple solution (heating, cooling and DHW supply) Hybrid operation with existing facilities Use of valuable machine room space for private purpose	Multiple solution (heating and DHW supply) Obtaining 80°C high LWT without supplementary heater Simple replacement of existing boiler	- Quick and easy installation - Easy check and monitoring - LG compressor with 10 years warranty

016

THERMAV... LINE-UP OVERVIEW

Refrigerant	Ту	/pe	Line-up	Unit	Power Supply 1)	Appearance	5 kW	7 kW
			R32 Monobloc S	Set	1Ø / 230V		HM051MR U44	HM071MR U44
	Mor		P.38	Jet	3Ø / 400V			
	IVIOII	овюс	R32 Monobloc	Set	1Ø / 230V	(B)	HM051M U43	HM071M U43
			P.54	Set	3Ø / 400V			
				Outdoor	1Ø / 230V			
		Hydro Box	R32 Hydrosplit Hydro Box	Unit	3Ø / 400V			
	Hydro		P.70	Indoor Unit	Common			
R32	split			Outdoor	1Ø / 230V			
		IWT	R32 Hydrosplit IWT	Unit	3Ø / 400V			
			P.80	Indoor Unit	Common			
		Hydro Box	R32 Split Hydro Box P.90	Outdoor Unit	1Ø / 230V		HU051MR U44	HU071MR U44
				Indoor Unit	19 / 2300		HN091MR NK5	
		IVA/T	R32 Split IWT IWT	Outdoor Unit	1Ø / 230V	0	HU051MR U44	HU071MR U44
		1001		Indoor Unit	- 10 / 230V		HN091	6T NB1
	Split			Outdoor Unit	- 1Ø / 230V -			
D/10A	Split	Hydro	R410A Split Hydro Box	Indoor Unit				
R410A		Box	P.108	Outdoor Unit	20/4004			
	F			Indoor Unit	3Ø / 400V			
R410A +		Floor	High .	Outdoor Unit	10 / 222/			
R134a		Floor standing	standing	Temperature P.118	Indoor Unit	1Ø / 230V		

1) The power supply is shown based on the outdoor unit.

Refrigerant	Туре	Power Supply	Appearance	200 L	270 L
R134a	Inverter Heat Pump Water Heater	1Ø / 230V		WH20S F5	
111344	P.126	10 / 2500			WH27S F5

^{*} Production of this product could be discontinued without prior notice considering manufacturer's circumstances.

•	•	•	•	-	-	•
LG BUSINESS	HEAT PUMP	THERMA V	WHAT IS	LG AIR TO	THERMA V	THERMA V
PARTNERSHIP &	TECHNOLOGY	INTRODUCTION	LG THERMA V	WATER	LINE-UP	LINE-UP
PRE-SALES/				HEAT PUMP	OVERVIEW	INTRODUCTIO
ENGINEERING				SOLUTION		
TOOLS				OVERVIEW		

9 kW	Appearance	12 kW	14 kW	16 kW
HM091MR U44	0 -	HM121MR U34	HM141MR U34	HM161MR U34
	Q	HM123MR U34	HM143MR U34	HM163MR U34
HM091M U43	0 -	HM121M U33	HM141M U33	HM161M U33
	0	HM123M U33	HM143M U33	HM163M U33
	0	HU121MRB U30	HU141MRB U30	HU161MRB U30
	0	HU123MRB U30	HU143MRB U30	HU163MRB U30
	Ē		HN1600MC NK1	
	0-	HU121MRB U30	HU141MRB U30	HU161MRB U30
	0	HU123MRB U30	HU143MRB U30	HU163MRB U30
	=		HN1616Y NB1	
HU091MR U44				
HN091MR NK5				
HU091MR U44				
HN0916T NB1				
	0	HU121MA U33	HU141MA U33	HU161MA U33
			HN1616M NK5	
	0	HU123MA U33	HU143MA U33	HU163MA U33
			HN1636M NK5	
	0			HU161HA U33
	=			HN1610H NK3

THERMA V.

LINE-UP INTRODUCTION



THERMA V R32 Monobloc S

The THERMA V R32 Monobloc S is the 2nd generation of LG's R32 Monobloc series. As implied by "silence" and "supreme," it boasts reduced noise level and best performance in the THERMA V Series. Combining the indoor and outdoor as one module, it's also connected by only water piping eliminating the need for refrigerant piping. Furthermore, hydronic components like the plate heat exchanger, expansion tank, water pump, flow sensor, pressure sensor, air vent valves, and safety valve are conveniently situated inside the unit. The R32 Monobloc S provides excellent heating performance, especially at low ambient temperature while lowering its carbon emissions with R32.

Line-up	Capacity (kW)	5.5	7.0	9.0	12.0	14.0	16.0
R32	1Ø 230V	•	•	•	•	•	•
Monobloc S	3Ø 400V				•	•	•



THERMA V R32 Monobloc

The LG THERMA V R32 Monobloc is a fully packaged unit, where the indoor and outdoor units are combined as one module. The outdoor Monobloc unit is connected to only water piping, therefore there is no need for refrigerant piping. Hydronic components such as the plate heat exchanger, expansion tank and water pump are situated inside the outdoor unit.

The Monobloc is designed for energy efficiency, convenience, and easy-to-use controls. Operating with low Global Warming Potential (GWP) R32 refrigerant and LG's exclusive R1 compressor, power meets sustainable heating. The system has an optional Wi-Fi modem and with LG's smartphone app, LG ThinQ, users can monitor and remotely control compatible LG products.

Line-up	Capacity (kW)	5.5	7.0	9.0	12.0	14.0	16.0
R32	1Ø 230V	•	•	•	•	•	•
Monobloc	3Ø 400V				•	•	•

LG BUSINESS
PARTNERSHIP &
PRE-SALES/
ENGINEERING
TOOLS

HEAT PUMP TECHNOLOGY THERMA V INTRODUCTION WHAT IS LG THERMA V LG AIR TO THERMA V WATER LINE-UP HEAT PUMP OVERVIEW SOLUTION

THERMA V LINE-UP INTRODUCTION



THERMA V R32 Hydrosplit Hydro Box

OVERVIEW

The LG THERMA V Hydrosplit series separates the Indoor unit (IDU) and outdoor unit (ODU), connecting them via water pipes.

The unit's heat exchanger is located within the ODU, reducing the risk of indoor refrigerant leakage.

THERMA V R32 Hydrosplit Hydro Box is a solution providing space heating, cooling and DHW supply with high installation flexibility thanks to the characteristic of being a wall mounted type. Since the indoor unit is installed on the wall rather than on the floor, space in the machine room is not wasted, and the light weight enables quick installation. Also, it has good maintainability because the indoor unit is located in the machine room.

Line-up	Capacity (kW)	5.5	7.0	9.0	12.0	14.0	16.0
R32	1Ø 230V				•	•	•
Hydrosplit Hydro Box	3Ø 400V				•	•	•

^{*} The power supply is shown based on the outdoor unit.



THERMA V R32 Hydrosplit IWT

The LG THERMA V Hydrosplit series separates the Indoor unit (IDU) and outdoor unit (ODU), connecting them via water pipes. The unit's heat exchanger is located within the ODU, reducing the risk of indoor refrigerant leakage.

THERMA V R32 Hydrosplit IWT combines an indoor unit, a water tank and complex piping into a single, space-saving solution that is able to provide space heating, cooling and DHW supply. Relatively compact and lightweight, the innovative all-in-one is easy to install and operate, and boasts the outstanding reliability and efficiency. Since there is no need to install a separate domestic hot water tank for hot water supply, space in the machine room is not wasted, and the concept with all-in-one enables quick installation.

Line-up	Capacity (kW)	5.5	7.0	9.0	12.0	14.0	16.0
R32 Hydrosplit	1Ø 230V				•	•	•
IWT	3Ø 400V				•	•	•

^{*} The power supply is shown based on the outdoor unit.

THERMA V.

LINE-UP INTRODUCTION




THERMA V R32 Split Hydro Box

The LG THERMA V R32 Split Hydro Box is a hydro box type system consisting of an indoor hydro box unit and an outdoor unit. The two units are connected by refrigerant piping only,

thus hydronic components such as plate heat exchanger, expansion tank and water pump are located within the indoor unit. Due to the split nature, freezing will not compromise this unit regardless of outdoor ambient temperatures. The Split has been designed specifically for new build and renovated houses. LG's highly efficient products can deliver effective space heating and hot water supply while operating with low Global Warming Potential (GWP) R32 refrigerant and LG's exclusive R1 compressor. The system has an optional Wi-Fi modem and with LG's smartphone app, LG ThinQ, users can monitor and remotely control compatible LG products.

Line-up	Capacity (kW)	5.5	7.0	9.0	12.0	14.0	16.0
R32 Split Hydro Box	1Ø 230V	•	•	•			
Hydro Box	3Ø 400V						

^{*} The power supply is shown based on the outdoor unit.



THERMA V R32 Split IWT

The LG THERMA V R32 Split IWT is a domestic hot water supply, space heating and cooling solution that conveniently combines an indoor hot water tank with a separate outdoor unit.

THERMA V R32 Split IWT is the perfect space-saving solution for residential applications because hydronic components like the Domestic Hot Water (DHW) and buffer tanks, which are typically installed separately, are fully integrated. Also, freezing will not compromise this unit regardless of outdoor ambient temperatures due to the split nature.

Line-up	Capacity (kW)	5.5	7.0	9.0	12.0	14.0	16.0
R32 Split	1Ø 230V	•	•	•			
IWT	3Ø 400V						

^{*} The power supply is shown based on the outdoor unit.

LG BUSINESS
PARTNERSHIP &
PRE-SALES/
ENGINEERING
TOOLS

HEAT PUMP TECHNOLOGY THERMA V INTRODUCTION WHAT IS LG THERMA V LG AIR TO WATER HEAT PUMP SOLUTION OVERVIEW THERMA V LINE-UP OVERVIEW THERMA V LINE-UP INTRODUCTION



THERMA V R410A Split Hydro Box

The LG THERMA V R410A Split Hydro Box is a hydro box type system consisting of an indoor hydro box unit and an outdoor unit. The two units are connected by refrigerant piping only, thus hydronic components such as the plate heat exchanger, expansion tank and water pump are located within the indoor unit. Due to the split nature, freezing will not compromise this unit regardless of outdoor ambient temperatures.

LG's THERMA V R410A Split Hydro Box is designed for the benefit of users and installers who want to apply a heating solution to a large capacity building or applications subject to colder climate conditions. It has a maximized energy efficiency of A++ in the mid-temperature ranges, which leads reduced operating costs.

Line-up	Capacity (kW)	5.5	7.0	9.0	12.0	14.0	16.0
R410A Split Hydro Box	1Ø 230V				•	•	•
Hydro Box	3Ø 400V				•	•	•

^{*} The power supply is shown based on the outdoor unit.



THERMA V High Temperature

The LG THERMA V High Temperature is a split type that consists of a floor standing indoor unit and an outdoor unit. Thanks to cascade (2 stage) compression technology, it can supply high leaving water temperature up to 80°C with high energy efficiency.

Since THERMA V High Temperature is solely able to produce and supply the high temperature water without electric heater, is suitable for houses which have poor insulation, older features or have to meet sanitary water regulations, which requires a higher water temperature.

Line-up	Capacity (kW)	5.5	7.0	9.0	12.0	14.0	16.0
High Temperature	1Ø 230V						•
Temperature	3Ø 400V						

 $^{^{\}star}$ The power supply is shown based on the outdoor unit.

THERMAV... LINE-UP INTRODUCTION

LG BUSINESS
PARTNERSHIP &
PRE-SALES/
ENGINEERING
TOOLS

HEAT PUMP TECHNOLOGY THERMA V INTRODUCTION WHAT IS LG AIR TO
LG THERMA V WATER
HEAT PUMP
SOLUTION

OVERVIEW

THERMA V LINE-UP OVERVIEW THERMA V LINE-UP INTRODUCTION



Flexible Installation Locations



Storage Room Bathroom





Garage



* Actual product appearance may differ from the above simulated scene.

Laundry Room



FEATURE OVERVIEW

LG THERMA V's Unique Features

THERMA V.

LG THERMA V has been designed for providing efficient space heating and domestic hot water heating with usage convenience to the customer. To achieve this ultimate goal, LG has been developed and applied core technologies and functions for heating to the LG THERMA V.

User Convenience


LG THERMA V is equipped with various user convenience functions, which allow for enhanced comfort and control. The textbased user-friendly interface on the remote control allows for optimized user intuition and the unit's wide connectivity also provide user control convenience.


Excellent Performance & Efficiency

LG THERMA V provides world-class energy efficiency by adopting LG's revolutionary technology such as the R1 compressor and the Black Fin heat exchanger. LG products have achieved a high heating performance even in extremely cold weather conditions and LG THERMA V can bring customers peace of mind through product reliability.

Easy Installation & Maintenance

LG THERMA V offers installation and design flexibility to professional installers. The LG Heating Configurator also allows professionals to save time during commissioning. During maintenance, the clip type connection allows fast and easy disassembly of the components.

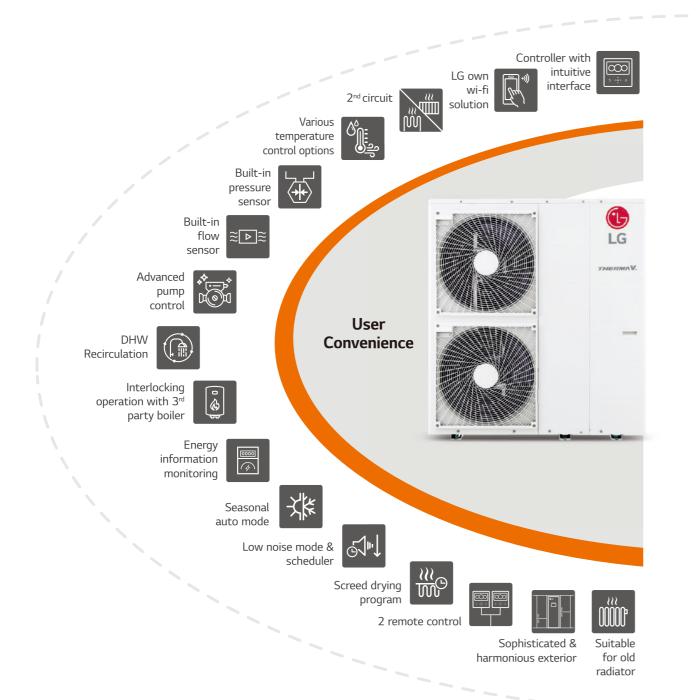

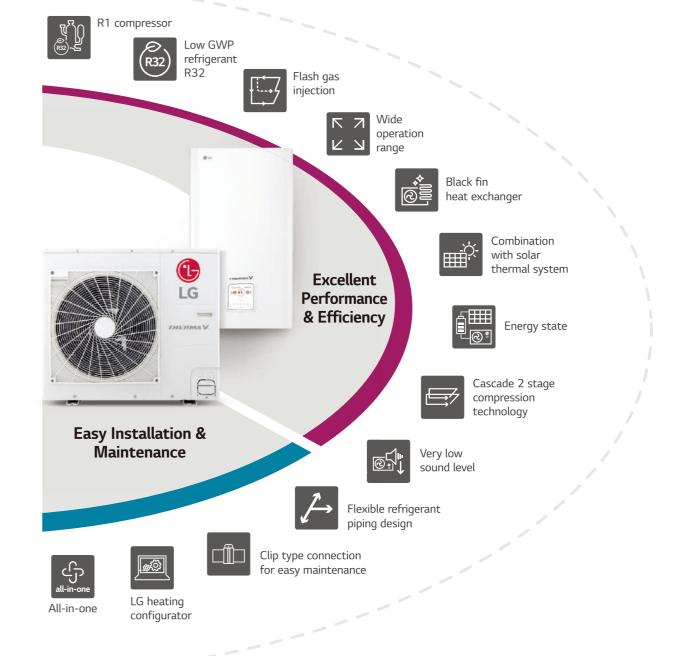


EXCELLENT PERFORMANCE & EFFICIENCY

R1Compressor™ LG's Revolutionary Technology

RI Compressor "technology offers advanced efficiency, reliability and operational range due in part to the enhanced tilting motion of the scroll.



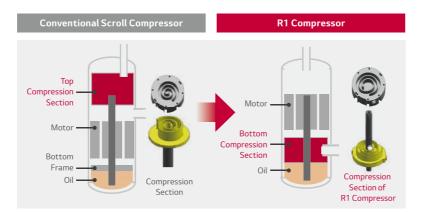

Black Fin Heat Exchanger


The THERMA V line-up includes a heat exchanger enhanced by black coating with enhanced epoxy resin for strong protection. This improvement in durability prolongs the product's lifespan and lowers both the operational and maintenance costs.





Flash Gas Injection

With the LG THERMA V R32 series, flash gas injection technology is applied to control the discharge temperature of the compressor efficiently. As a result of this technology, the heating operation range is expanded and the heating performance at low ambient temperature is enhanced.





Direct Modbus Communication

Therma V can be connected and controlled by 3rd party control system using Modbus protocol directly, without Modbus RTU





Eco-Conscious with R32 Refrigerant

Background

Due to accelerated global warming and the destruction of the ozone layer, various international conventions and meetings are held to enhance restrictions to the use of refrigerant or enforce the us of eco-conscious refrigerant R32 is internationally acclaimed for being eco-friendly. This low volume refrigerant is as efficient as any conventional refrigerant but boasts a 68% reduced global warming



Comparison & Benefit

R32 efficiently works even in small volume compared to existing R410A refrigerant, which decreases the potential hazard of global warming. Furthermore, R32 refrigerant is easy to recycle thanks to its single composition.

Descript	ion	R32	R410A
	Low Global Warming Potential (GWP)	675 1)	2088 1
	Lower Amount of Gas Charge	Less	High
îíí	Higher System Performance	R32 systems also u per kilowatt of ca	,
3	Simple Refrigerant Recyclability	Single component	Mixture R32 50% / R125 50%
K N	High Capacity	High refrigerant com high capacity as compare R22 and	ed to existing refrigerant


※ 1) Source: Global Warming Potential Values (2007, AR4)

2) This ratio is general for helping understanding, It may differ depending on the



Combination with Solar Thermal System

By combining the solar system with Therma V, the efficiency of DHW heating operation can be maximized.

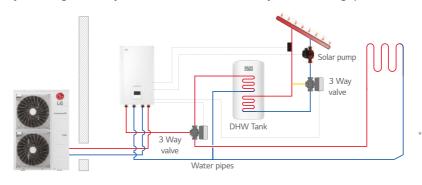

* Applied model : Solar Thermal Kit (PHLLA) is required for R32 Monobloc and PT-1000 type temp. sensor (field supply) is required for R32 Monobloc S, R32 Hydrosplit Hydro Box,


Energy State

THERMA V is operated automatically according to the status signals received from power supply companies. This function can correspond to each country's specific tariff for heat pump application on smart grids.

		Descr	iption			
Energy	Signal Mode (S	mart Grid)	Modbus Mode (ESS)			
States	Operation Mode	Power Supply Status	Operation Mode	Battery Charged Status	Operation	
ES1	Operation Off				Forced off to avoid peak load	
ES2	Normal		Normal		Normal operation	
ES3*	On Recommend				Changed target temperature higher (heating: +2°C, DHW: +5°C)	
ES4*	On Command				Changed target temperature higher (DHW : 80°C)	
ES5**			On Command (step2)		Changed target temperature higher (heating:+5°C, cooling:-5°C, DHW:+30°C)	
ES6**			On Recommend (step1)		Changed target temperature higher (heating:+2°C, cooling:-2°C, DHW:+10°C)	
ES7**			Energy Saving		Changed target temperature lower (heating:-2°C, cooling:+2°C)	
ES8**			Super Energy Saving		Changed target temperature lower (heating: -5°C, cooling: +5°C)	

- * Contact signal designated ES3 and ES4 can be changed to ES5 \sim ES8.
- ** Offset values of heating, cooling and DHW are changeable
- *** THERMA V can connect not only ESS but also 3rd party controller through Modbus, in that case, ES1 to ES8 are used.

[Area of energy state for ESS]



SoC : State of ChargeSurplus Power (SP) = PV Power – Load Power · Area of Energy State for ESS can be adjusted by ESS.

USER CONVENIENCE



LG ThinQ Seamless Connectivity

LG ThinQ allows users to monitor and control compatible LG products remotely, so they can set the temperature and regulate the use of their THERMA V anytime, anywhere. ThinQ technology also works with voice activation with Google Home.



Mandatory accessory:
PWFMDD200 (LG Wi-Fi Modem)
PWYREW000 (10m extension connect cable in between THERMA V and LG Wi-Fi Modem) could be required depends on installation condition.

- * Search "LG ThinQ" on Google playstore or App store, then download the app.
- * Google home voice is supported in United Kingdom, France, Germany, Spain, Italy, Austria, Ireland, Portugal.




Intuitive Control

THERMA V is equipped with a new remote controller which supports various functions.






- Premium design (4.3 inch color LCD)
- $\bullet \ \, \text{User friendly interface (simple graphic, icon \& text)} \\$
- Convenient functions (easy schedule setting & installer setting)
- $\bullet \ {\sf Energy} \ {\sf monitoring} \ {\sf without} \ {\sf meter} \ {\sf interface} \ ({\sf estimated} \ {\sf power} \ {\sf consumption})$
- $\ensuremath{^{\star}}$ Instant power consumption and cumulative power consumption



Seasonal Auto Mode

The operation mode and target temperature will be changed according to the outdoor temperature automatically. Moreover, this function can be conveniently set using visualized graphics.



Target Temp.	□ Back
Circuit1	Circuit2
-30 -20 -10 0 10	Water Dis the property forms of the propert

Various Temperature Control Options

Various temperature control options are possible for the user's comfort and convenience, to include the newly added simultaneous control option (room and water temperature).

- Option 1: Control based on leaving water temperature
- Option 2: Control based on entering water temperature
- Option 3 : Control based on room air temperature
- Option 4: Control based on room air and water temperature simultaneously



*

Advanced Pump Control Options


 $Various\ pump\ operation\ options\ contribute\ to\ energy\ savings\ by\ providing\ optimum\ water\ pump\ control\ and\ reliable\ product\ operation.$



Description	Water Flow Change as per load condition
It operates with the capacity set for the water pump. (range 10 ~ 100%)	No
Automatically controlled to maintain the set flow rate. (5, 7, 9kW range: 8 ~ 26 LPM / 12, 14, 16kW range: 17 ~ 46 LPM)	No
Automatically controlled to maintain the set ∆T. (range 5 ~ 13°C)	Yes
ΔT is changed as per Target Temp.	Yes
	It operates with the capacity set for the water pump. (range 10 – 100%) Automatically controlled to maintain the set flow rate. (5, 7, 9kW range: 8 ~ 26 LPM / 12, 14, 16kW range: 17 ~ 46 LPM) Automatically controlled to maintain the set ΔT . (range 5 ~ 13°C)


 $^{^{\}star}\!\Delta T$ = temperature difference between inlet and outlet water temperature.

2 Zones (circuit 1/ circuit 2) temperature control through separate heating circuits is possible with mixing valve kit.

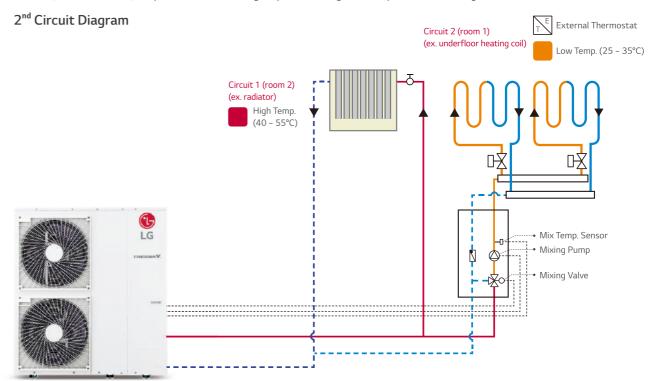


Interlocking Operation with 3rd Party Boiler

 $3^{rd} \, \text{Party boiler such as oil, gas or electric boiler can be activated automatically or manually by the THERMA \, V \, controller.}$

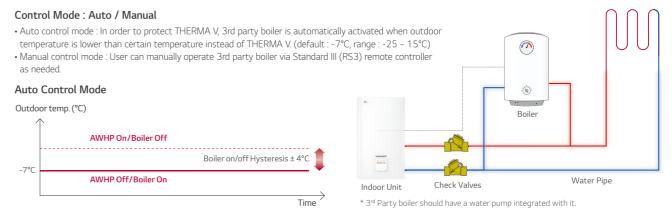

Water Circuit Monitoring

It is possible to monitor via remote controller not only temperature of water circuit but also flow rate and pressure. These information provides installers with more reliable information for easier installation and maintenance (periodic strainer cleaning).





More info. ☐ Back Flow Rate | 40 LPM (L/min) Water Pressure | 1.6 bar

Available information on the screen


- The room temperature
- The water inlet / outlet temperature
- The water pump operation
- The water flow rate
- The water pressure
- The solar heat temperature
- The outdoor temperature

USER CONVENIENCE

Energy Monitoring

Without connection of Meter Interface, estimated power consumption for Therma V and backup heater can be monitored on the remote controller.

System Diagram

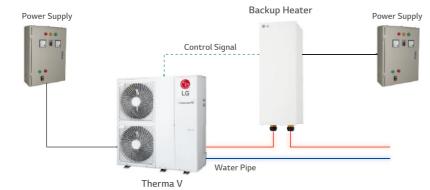

Installer setting menu



Monitoring view


- Instant power consumption

Cumulative Po	ower consur	nption
	(D) - (D) -	4

nstantano	oous Power	Dank Mak		ear-on-yea	r Usage	Black @ OK	
			Power			Calmin	
Target	10 kW	Usage Rate		2021.03			
Current	O AW		<	2019;05	Q kWh	Year-on-year Growth	Į,
Total	35 AW	0.	`			0	Ĩ
				2020.05	Ø kWe		


Low Noise Mode & Scheduler

Low noise mode operation can be activated by remote controller and set on a weekly on/off schedule to reduce the unit's noise level.



DHW Recirculation Pump

The DHW recirculation pump can be connected to the Therma V and controlled according to the schedule function. DHW recirculation function helps maintain the hot water temperature inside the pipe even when hot water is not in use and prevents Legionella bacteria.





2 Remote Control

Enhanced convenience with an additional control installed in another residential area.

System Diagram




* Master is for the installation setting

* Slave is for user setting.

Standard III (RS3) Controller Interface

• THERMA V is operating based the room where slave controller is installed.



THERMA V.

EASY INSTALLATION & MAINTENANCE

LG Heating Configurator

Easy Installation Setting and Commissioning

- Based on installation site information, installers can prepare presetting with the LG heating configurator and save data into a memory card from the office.
- Once on site, installers can simply insert memory card into the back of the remote control to activate configuration data.









Flexible Refrigerant Piping Design


Long piping length and 3 Way piping enable flexible design and easy





Clip Type Connection for Easy Maintenance


As clip solution provides easy maintenance and SVC works, maintenance for following parts can be done by hands without special tool.

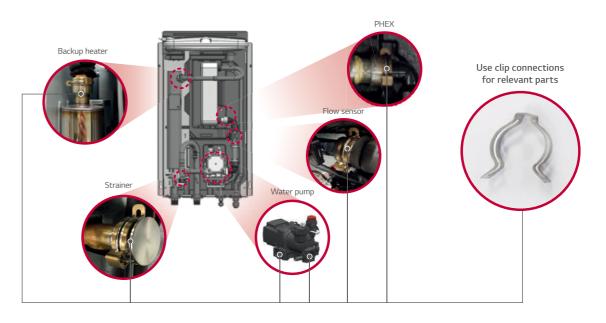




THERMA V_m (R32) R32 MONOBLOC S





Energy Label



- * 16kW 1Ø model.

Excellent Performance & Efficiency









User Convenience











Easy Installation & Maintenance








R32 Monobloc S Introduction

The THERMA V R32 Monobloc S is the 2nd generation of LG's R32 Monobloc series. As implied by "silence" and "supreme," it boasts reduced noise level and best performance in the THERMA V Series. Combining the indoor and outdoor as one module, it's also connected by only water piping eliminating the need for refrigerant piping. Furthermore, hydronic components like the plate heat exchanger, expansion tank, water pump, flow sensor, pressure sensor, air vent valves, and safety valve are conveniently situated inside the unit. The R32 Monobloc S provides excellent heating performance, especially at low ambient temperature while lowering its carbon emissions with R32.

Key Components

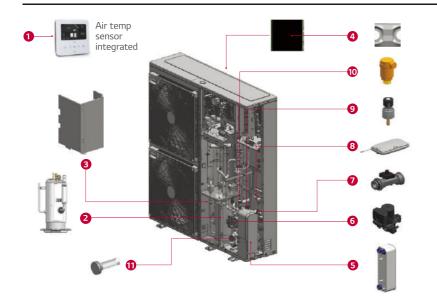


- 1 Standard III remote controller (separately provided)
- 2 R1 Compressor
- 3 Compressor noise shield
- 4 Black Fin heat exchanger (ref/air)
- **5** Plate type heat exchanger (ref/water)
- **6** Water pump (GRUNDFOS)
- Water flow sensor
- 8 Expansion vessel (8*l*)
- 9 Water pressure sensor
- Air vent valve
- Strainer



Monobloc Concept

R32 Monobloc S is an all-in-one concept and reduced weight allows for quicker and easier installations.


- Additional hydronic components are included in the package
- Easier and quicker installation without refrigerant piping work

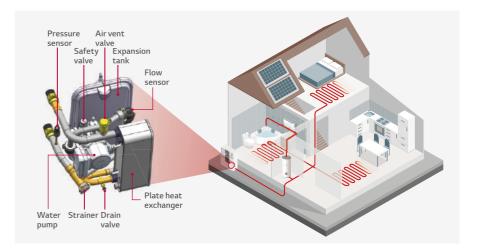


Reduced Noise Level

R32 Monobloc S can be installed at the minimum of 4m away (based on 9kW model & Low noise mode) from neighboring houses while complying with German noise regulation.

Descr	iption	Germany	Austria	Switzerland	Netherlands	
	Day Time	50 dB (A) (06:00 ~ 22:00)	40 dB (A) (06:00 ~ 19:00)	40 dB (A) (07:00 ~ 19:00)	45 dB (A) (07:00 ~ 19:00)	
Sound Pressure Threshold	Evening	-	35 dB (A) (19:00 ~ 22:00)	-	-	
	Night Time	35 dB (A) (22:00 ~ 06:00)	30 dB (A) (22:00 ~ 06:00)	35 dB (A) (19:00 ~ 07:00)	40 dB (A) (19:00 ~ 07:00)	

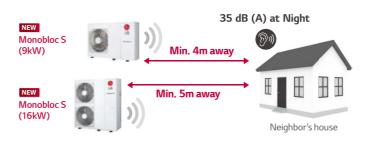



^{*} Sound Pressure Level is converted from Sound Power Level of Low Noise Mode based on Tonality penalty of 0dB and installation in free-field.

^{*} Detailed description for each function is presented on page 28 \sim 35.

R32 Monobloc S

HM051MR U44 HM071MR U44 HM091MR U44

























LG

Features

- All-in-one outdoor unit
- SCOP up to 4.55 (Average climate / Low temp. application): A+++ SCOP up to 3.20 (Average climate / Mid temp. application): A++
- COP up to 4.70 (Outdoor air 7°C / Leaving water 35°C)
- 100% heating capacity at -15°C OAT (@ LWT 35°C)
- Low sound level allowing high installation location flexibility
- Wide operation range (ambient: -25 ~ 35°C / water side: 15 ~ 65°C)
- Built-in water flow & pressure sensors to monitor real-time water circuit
- R32 refrigerant with reduced global warming potential (GWP)
- R1 compressor
- Improved heat exchanger design (New Black Fin)
- LG ThinQ
- KEYMARK / EHPA (for Germany) / MCS / EUROVENT certification
- * EHPA (for Austria and Switzerland) label under development

Model Line-up

	Unit	Model Name						
Capacity		Capacity (kW)						
		5.5	7.0	9.0				
1 Phase Model 220 ~ 240V, 1Ø, 50Hz	Monobloc Unit	HM051MR U44	HM071MR U44	HM091MR U44				

Seasonal Energy

Description			Unit	HM051MR U44	HM071MR U44	HM091MR U44
Average		SCOP	-	4.46	4.48	4.55
	Space Heating Water Se	Seasonal Space Heating Efficiency (ηs)	%	175	176	179
Space Heating (According to		Seasonal Space Heating Eff. Class (A+++ to D Scale)	-	A+++	A+++	A+++
EN14825)	Average	SCOP	-	3.20	3.20	3.20
,	Climate	Seasonal Space Heating Efficiency (ηs)	%	125	125	125
	Outlet 55°C	Seasonal Space Heating Eff. Class (A+++ to D Scale)	-	A++	A++	A++

Nominal Capacity and Nominal Power Input

Description		OAT ¹⁾ (DB)	LWT ²⁾ (DB)	Unit	HM051MR U44	HM071MR U44	HM091MR U44
		7°C	35°C		5.50	7.00	9.00
	Heating	7°C	55°C		5.50	5.50	5.50
Nominal Capacity		2°C	35°C	kW	4.40	5.60	6.80
	Cooling	35°C	18°C		5.50	7.00	9.00
		35°C	7°C		5.50	7.00	9.00
	Heating	7°C	35°C		1.17	1.49	1.96
		7°C	55°C	kW	2.04	2.04	2.04
Nominal Power Input		2°C	35°C		1.22	1.58	1.94
	C - 1:	35°C	18°C		1.17	1.56	2.14
	Cooling	35°C	7°C		1.67	2.19	2.90
		7°C	35°C		4.70	4.70	4.60
COP	Heating	7°C	55°C	W/W	2.70	2.70	2.70
		2°C	35°C		3.60	3.55	3.50
EER	Cooling	35°C	18°C	W/W	4.70	4.50	4.20
LLIN	Cooling	35°C	7°C	00/00	3.30	3.20	3.10

1) OAT: Outdoor Air Temperature

2) LWT: Leaving Water Temperature

Product Specification

Technical Spe	ecification			Unit	HM051MR U44	HM071MR U44	HM091MR U44		
	Operation Range	Heating				15 ~ 65			
	(leaving water	Cooling	Min. ~ Max.	°C DB		5 ~ 27 (16 ~ 27) ¹⁾			
Water Side	temperature)	DHW	-			15 ~ 80 ²⁾			
vvater Side	Dining Connections	Water Circuit	Inlet	Inch	Male PT 1" according to ISO 7-1 (tapered pipe threads)				
	Piping Connections	vvater Circuit	Outlet	Inch	Male PT 1" according to ISO 7-1 (tapered pipe threads)				
	Rated Water Flow Rate at	t LWT 35°C		LPM	15.8	20.1	25.9		
	Operation Range	Heating	Min ~ Max	°C DB		-25 ~ 35			
	(outdoor temperature)	Cooling	IVIIII ~ IVIAX	CDB		5 ~ 48			
	Compressor	Quantity		EA	1				
Refrigerant	Compressor	Туре		-	Hermetic Sealed Scroll				
Side		Туре		-	R32				
	Defricerent	GWP (Global W	arming Potential)	-	675				
Refrigerant	Reirigerant	Precharged Amount		g		1,400			
		t-CO2 eq		-		0.945			
Sound Power I	ll	Hastina	Rated	- JD(V)	57				
Sound Power I	Level	Heating	Low Noise Mode	dB(A)	54	5	5		
C I D		H. et	Rated	ID(A)		35			
Sound Pressur	re Level (at 1m)	Heating	Low Noise Mode	dB(A)	32	3	3		
Dimensions		Unit	W×H×D	mm		1,239 × 834 × 330			
Weight		Unit		kg		89.0			
Exterior		Color / RAL Cod	le	-	V	Varm Gray / RAL 704	4		
		Voltage, Phase,	Frequency	V, Ø, Hz		220-240, 1, 50			
Davier Cumply		Rated Running	Heating	А	5.2	6.6	8.7		
Power Supply		Current	Cooling	А	5.2	6.9	9.5		
		Recommended	Circuit Breaker	А	16	20	25		
Wiring Connec	ctions	Power Supply ((included earth		mm² x cores	4.0 x 3C				

1) When fan coil unit not used.

2) DHW 58~80°C Operating is available only when the booster heater is operating.

1. Due to our policy of innovation some specifications may be changed without notification.
2. Wiring cable size must comply with the applicable local and national codes.

Especially the power cable and circuit breaker should be selected in accordance with that.

3. Sound power level is measured on the rated condition in according with ISO 9614 standard. Sound pressure level is converted from sound power level based on tonality penalty of OdB and installation in free-field. Therefore, these values can be increased owing to ambient conditions during operation. Rated sound power level is according to the EN12102-1 under

conditions of the EN14825. 4. Performances are accordance with EN14511 and reflect ErP testing conditions. Above gives the declared values at rated conditions acc. ErP regulation. • Rated running current : Outdoor Temp. 7°C DB / 6°CWB, LWT 35°C

5. This product contains Fluorinated greenhouse gases.

Performance Table for Heating Operation

Maximum Heating Capacity (Including Defrost Effect)

HM051MR U44

Outdoor	LWT 30 °C	LWT 35 ℃	LWT 40 °C	LWT 45 °C	LWT 50 °C	LWT 55 °C	LWT 60 °C	LWT 65 °C
Temperature	TC	TC	TC	TC	TC	TC	TC	TC
-25°C DB	5.50	5.50	5.50	5.50	-	-	-	-
-20°C DB	5.50	5.50	5.50	5.50	5.23	-	-	-
-15°C DB	5.50	5.50	5.50	5.50	5.23	5.23	-	-
-7°C DB	5.50	5.50	5.50	5.50	5.50	5.50	5.50	-
-4°C DB	5.50	5.50	5.50	5.50	5.50	5.50	5.50	5.50
-2°C DB	5.50	5.50	5.50	5.50	5.50	5.50	5.50	5.50
2°C DB	5.50	5.50	5.50	5.50	5.50	5.50	5.50	5.50
7°C DB	5.50	5.50	5.50	5.50	5.50	5.50	5.50	5.50
10°C DB	5.50	5.50	5.50	5.50	5.50	5.50	5.50	5.50
15°C DB	5.50	5.50	5.50	5.50	5.50	5.50	5.50	5.50
18°C DB	5.50	5.50	5.50	5.50	5.50	5.50	5.50	5.50
20°C DB	5.50	5.50	5.50	5.50	5.50	5.50	5.50	5.50
35°C DB	5.50	5.50	5.50	5.50	5.50	5.50	5.50	5.50

HM071MR U44

Outdoor	LWT 30 °C	LWT 35 °C	LWT 40 °C	LWT 45 °C	LWT 50 °C	LWT 55 ℃	LWT 60 °C	LWT 65 °C
Temperature	TC	TC	TC	TC	TC	TC	TC	TC
-25°C DB	5.85	5.85	5.85	5.85	-	-	-	-
-20°C DB	6.43	6.43	6.43	6.43	6.10	-	-	-
-15°C DB	7.00	7.00	7.00	7.00	6.65	6.65	-	-
-7°C DB	7.00	7.00	7.00	7.00	7.00	7.00	7.00	-
-4°C DB	7.00	7.00	7.00	7.00	7.00	7.00	7.00	7.00
-2°C DB	7.00	7.00	7.00	7.00	7.00	7.00	7.00	7.00
2°C DB	7.00	7.00	7.00	7.00	7.00	7.00	7.00	7.00
7°C DB	7.00	7.00	7.00	7.00	7.00	7.00	7.00	7.00
10°C DB	7.00	7.00	7.00	7.00	7.00	7.00	7.00	7.00
15°C DB	7.00	7.00	7.00	7.00	7.00	7.00	7.00	7.00
18°C DB	7.00	7.00	7.00	7.00	7.00	7.00	7.00	7.00
20°C DB	7.00	7.00	7.00	7.00	7.00	7.00	7.00	7.00
35°C DB	7.00	7.00	7.00	7.00	7.00	7.00	7.00	7.00

HM091MR U44

Outdoor	LWT 30 °C	LWT 35 °C	LWT 40 °C	LWT 45 °C	LWT 50 °C	LWT 55 °C	LWT 60 °C	LWT 65 °C
Temperature	TC							
-25°C DB	6.20	6.20	6.20	6.20	-	-	-	-
-20°C DB	7.60	7.60	7.60	7.60	7.22	-	-	-
-15°C DB	9.00	9.00	9.00	9.00	8.55	8.55	-	-
-7°C DB	9.00	9.00	9.00	9.00	9.00	9.00	9.00	-
-4°C DB	9.00	9.00	9.00	9.00	9.00	9.00	9.00	9.00
-2°C DB	9.00	9.00	9.00	9.00	9.00	9.00	9.00	9.00
2°C DB	9.00	9.00	9.00	9.00	9.00	9.00	9.00	9.00
7°C DB	9.00	9.00	9.00	9.00	9.00	9.00	9.00	9.00
10°C DB	9.00	9.00	9.00	9.00	9.00	9.00	9.00	9.00
15°C DB	9.00	9.00	9.00	9.00	9.00	9.00	9.00	9.00
18°C DB	9.00	9.00	9.00	9.00	9.00	9.00	9.00	9.00
20°C DB	9.00	9.00	9.00	9.00	9.00	9.00	9.00	9.00
35°C DB	9.00	9.00	9.00	9.00	9.00	9.00	9.00	9.00

- 1. DB: Dry Bulb Temperature (°C), LWT: Leaving Water Temperature (°C), LPM: Liters Per Minute (\(\ell \)/min), TC: Total Capacity (kW) 2. Direct interpolation is permissible. Do not extrapolate.

 3. Measuring procedure follows EN-14511.

- Rated values are based on standard conditions and it can be found on specifications.
 Above table values may not be matched according to installation condition. Except for rated value, the performance is not guaranteed.
 In accordance with the test standard (or nations), the rating will vary slightly.
- 4. The shaded areas are not guaranteed continuous operation.

Performance Table for Cooling Operation

Maximum Cooling Capacity

HM051MR U44

Outdoor	LWT 7°C	LWT 10°C	LWT 13°C	LWT 15°C	LWT 18°C	LWT 20°C	LWT 22°C
Temperature	TC	TC	TC	TC	TC	TC	TC
10°C DB	5.50	5.50	5.50	5.50	5.50	5.50	5.50
20°C DB	5.50	5.50	5.50	5.50	5.50	5.50	5.50
30°C DB	5.50	5.50	5.50	5.50	5.50	5.50	5.50
35°C DB	5.50	5.50	5.50	5.50	5.50	5.50	5.50
40°C DB	5.29	5.32	5.36	5.38	5.41	5.43	5.45
45°C DB	5.09	5.15	5.21	5.25	5.31	5.36	5.40

HM071MR U44

Outdoor	LWT 7°C	LWT 10°C	LWT 13°C	LWT 15°C	LWT 18°C	LWT 20°C	LWT 22°C
Temperature	TC	TC	TC	TC	TC	TC	TC
10°C DB	7.00	7.00	7.00	7.00	7.00	7.00	7.00
20°C DB	7.00	7.00	7.00	7.00	7.00	7.00	7.00
30°C DB	7.00	7.00	7.00	7.00	7.00	7.00	7.00
35°C DB	7.00	7.00	7.00	7.00	7.00	7.00	7.00
40°C DB	6.36	6.45	6.55	6.61	6.71	6.77	6.84
45°C DB	5.71	5.82	5.92	5.99	6.10	6.17	6.24

HM091MR U44

Outdoor	LWT 7°C	LWT 10°C	LWT 13°C	LWT 15°C	LWT 18°C	LWT 20°C	LWT 22°C
Temperature	TC	TC	TC	TC	TC	TC	TC
10°C DB	9.00	9.00	9.00	9.00	9.00	9.00	9.00
20°C DB	9.00	9.00	9.00	9.00	9.00	9.00	9.00
30°C DB	9.00	9.00	9.00	9.00	9.00	9.00	9.00
35°C DB	9.00	9.00	9.00	9.00	9.00	9.00	9.00
40°C DB	7.66	7.66	7.65	7.65	7.65	7.65	7.65
45°C DB	6.31	6.35	6.39	6.42	6.45	6.48	6.51

- 1. DB: Dry Bulb Temperature (°C), LWT: Leaving Water Temperature (°C), LPM: Liters Per Minute (ℓ/\min) , TC: Total Capacity (kW)
- Direct interpolation is permissible. Do not extrapolate.
 Measuring procedure follows EN-14511.


- Rated values are based on standard conditions and it can be found on specifications.
 Above table values may not be matched according to installation condition. Except for rated value, the performance is not guaranteed.
 In accordance with the test standard (or nations), the rating will vary slightly.
- 4. The shaded areas are not guaranteed continuous operation.


Drawings

	Unit	Model Name						
Category		Capacity (kW)						
		5.5	7.0	9.0				
1 Phase Model 220 ~ 240V, 1Ø, 50Hz	Monobloc Unit	HM051MR U44	HM071MR U44	HM091MR U44				


HM051MR U44 / HM071MR U44 / HM091MR U44

[Unit:mm]

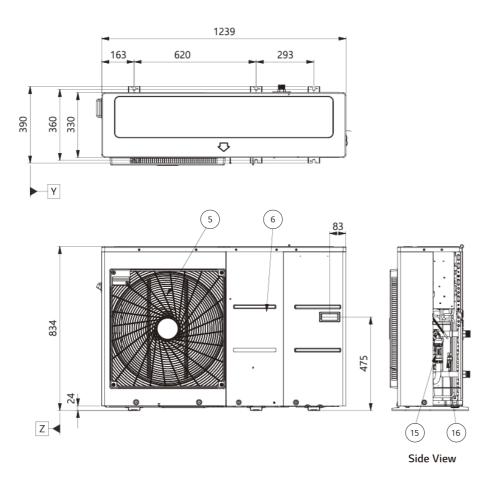





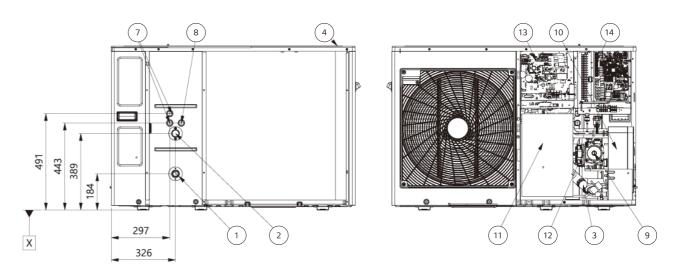

No.	Part Name	Description
1	Entering water pipe	Male PT 1" according to ISO 7-1 (tapered pipe threads)
2	Leaving water pipe	Male PT 1" according to ISO 7-1 (tapered pipe threads)
3	Strainer	Filtering and stacking particles inside circulating water
4	Top cover	-
5	Front Panel	-
6	Side Panel	-
7	Low Voltage	Communication cable hole
8	UNIT Power	Power cable hole
9	Water Pump	GRUNDFOS UPM3K 20-75 CHBL
10	Plate Heat Exchanger	Heat exchange between refrigerant and water
11	Compressor shield panel	-
12	Safety valve	Open at water pressure 3 bar
13	Indoor Control Box	Indoor PCB and terminal blocks
14	Outdoor Control Box	Outdoor PCB and terminal blocks
15	Flow sensor	SIKA VVX20 5-80 LPM
16	Pressure Sensor	SENSATA 2HMP3-05W 0-2MPa

R32 Monobloc S

HM121MR U34 HM141MR U34 HM161MR U34 HM123MR U34 HM143MR U34

HM163MR U34

























Features

- All-in-one outdoor unit
- SCOP up to 4.67 (Average climate / Low temp. application): A+++ SCOP up to 3.47 (Average climate / Mid temp. application): A++
- COP up to 4.90 (Outdoor air 7°C / Leaving water 35°C)
- 100% heating capacity at -15°C OAT (@ LWT 35°C, except for 16kW model)
- Low sound level allowing high installation location flexibility
- Wide operation range (ambient: -25 ~ 35°C / water side: 15 ~ 65°C)
- Built-in water flow & pressure sensors to monitor real-time water circuit
- R32 refrigerant with reduced global warming potential (GWP)
- R1 compressor
- Improved heat exchanger design (New Black Fin)
- LG ThinQ
- KEYMARK / EHPA (for Germany, 3Ø model only) / MCS / EUROVENT certification
- * EHPA (for Austria and Switzerland) label under development

Model Line-up

	Unit	Model Name						
Capacity		Capacity (kW)						
		12.0	14.0	16.0				
1 Phase Model 220 ~ 240V, 1Ø, 50Hz	Monobloc Unit	HM121MR U34	HM141MR U34	HM161MR U34				
3 Phase Model 380 ~ 415V, 3Ø, 50Hz		HM123MR U34	HM143MR U34	HM163MR U34				

Seasonal Energy

Description			Unit		HM141MR U34 (1Ø) HM143MR U34 (3Ø)	
Average		SCOP	-	4.67	4.62	4.53
	Climate Water	Seasonal Space Heating Efficiency (ηs)		184	182	178
Space Heating (According to	Outlet 35°C	Seasonal Space Heating Eff. Class (A+++ to D Scale)	-	A+++	A+++	A+++
EN14825)	Average	SCOP	-	3.47	3.46	3.45
′	Climate Water	Seasonal Space Heating Efficiency (ηs)	%	136	135	135
	Outlet 55°C	Seasonal Space Heating Eff. Class (A+++ to D Scale)	-	A++	A++	A++

Nominal Capacity and Nominal Power Input

Description		OAT ¹⁾	LWT ²⁾	Unit	HM121MR U34 (1Ø)	HM141MR U34 (1Ø)	HM161MR U34 (1Ø)
Description		(DB)	(DB)	Onit	HM123MR U34 (3Ø)	HM143MR U34 (3Ø)	HM163MR U34 (3Ø)
		7°C	35°C		12.00	14.00	16.00
Nominal Capacity	Heating	7°C	55°C		11.00	11.50	12.00
		2°C	35°C	kW	11.00	12.00	13.80
	Cooling	35°C	18°C		12.00	14.00	16.00
	Cooling	35°C	7°C		12.00	14.00	16.00
	Heating	7°C	35°C	kW	2.45	2.92	3.40
		7°C	55°C		3.79	4.04	4.29
Nominal Power Input		2°C	35°C		3.01	3.31	3.83
	CI:	35°C	18°C		2.53	3.26	4.00
	Cooling	35°C	7°C		3.64	4.24	5.16
		7°C	35°C		4.90	4.80	4.70
COP	Heating	7°C	55°C	W/W	2.90	2.85	2.80
		2°C	35°C		3.65	3.63	3.60
EER	Cooling	35°C	18°C	W/W	4.75	4.30	4.00
EER	Cooling	35°C	7°C	V V / V V	3.30	3.30	3.10

1) OAT : Outdoor Air Temperature 2) LWT : Leaving Water Temperature

Product Specification

Technical S	pecification			Unit	HM121MR U34	HM141MR U34	HM161MR U34		HM143MR U34	HM163MR U34	
	Operation Range	Heating			15 ~ 65						
	(leaving water	Cooling	Min. ~ Max.	°C DB	°C DB 5 ~ 27 (16 ~ 27)¹¹)						
Water	temperature)	DHW				15 ~ 80 ²⁾					
Side	Piping	Water	Inlet	Inch		Male PT 1" a	ccording to ISC	7-1 (tapered	pipe threads)		
	Connections	Circuit	Outlet	Inch	Male PT 1" according to ISO 7-1 (tapered pipe threads)						
Rated Water Flow Rate at LWT 35°C				LPM	34.5	40.3	46.0	34.5	40.3	46.0	
	Operation Range	Heating	Min. ~ Max.	°C DB			-25	~ 35			
	(outdoor temp.)	Cooling	IVIIII. ~ IVIAX.	CDB	5 ~ 48						
	Compressor	Quantity		EA			1	1			
Refrigerant	Compressor	Туре		-			Hermetic S	ealed Scroll			
Side		Туре		-	R32						
Refrigerant	Dofrigorout	GWP (global warr		-	675						
	Refrigerant	Precharged Amo	unt	g			2,0	00			
	t-CO ₂ eq		-			1.3	50				
Sound Powe	ar Laural	Heating	Rated	dB(A)	60	(51	60	6	1	
Souria Powe	er Level	пеаспід	Low Noise Mode	UD(A)	56	E	57	56	5	7	
Cound Dross	ure Level (at 1m)	Heating	Rated	dB(A)	38	3	39	38	3	9	
Souria Press	ure Level (at 1111)	пеаціід	Low Noise Mode	UD(A)	34	3	35	34	3	5	
Dimensions		Unit	WxHxD	mm			1,239 x 1,	380 x 330			
Weight		Unit		kg			118	8.6			
Exterior		Color / RAL Cod	le	-			Warm Gray	/ RAL 7044			
		Voltage, Phase,	Frequency	V, Ø, Hz	2	20-240, 1, 5	0	3	380-415, 3, 50)	
Power Supp	h.	Rated Running	Heating	А	10.9	12.9	15.1	3.6	4.3	5.0	
rower supp	ty	Current	Cooling	А	11.2	14.4	17.7	3.7	4.8	5.9	
		Recommended C	ircuit Breaker	А		40			16		
Wiring Con	Viring Connections Power Supply Cable (included earth, H07RN-F)			mm ² x		6.0 x 3C			4.0 x 5C		

1) When fan coil unit not used.

2) DHW 58~80°C Operating is available only when the booster heater is operating.

- $1. \ Due \ to \ our \ policy \ of \ innovation \ some \ specifications \ may \ be \ changed \ without \ notification.$
- 2. Wiring cable size must comply with the applicable local and national codes.
- Especially the power cable and circuit breaker should be selected in accordance with that.
- $3. \, Sound \, power \, level \, is \, measured \, on \, the \, rated \, condition \, in \, according \, with \, ISO \, 9614 \, standard.$ Sound pressure level is converted from sound power level based on tonality penalty of OdB and installation in free-field. Therefore, these values can be increased owing to ambient conditions during operation. Rated sound power level is according to the EN12102-1 under
- conditions of the EN14825. 4. Performances are accordance with EN14511 and reflect ErP testing conditions. Above gives the declared values at rated conditions acc. ErP regulation.
- Rated running current : Outdoor Temp. 7°C DB / 6°CWB, LWT 35°C 5. This product contains Fluorinated greenhouse gases.

Performance Table for Heating Operation

Maximum Heating Capacity (Including Defrost Effect)

HM121MR U34 / HM123MR U34

Outdoor	LWT 30 °C	LWT 35 ℃	LWT 40 °C	LWT 45 °C	LWT 50 °C	LWT 55 ℃	LWT 60 °C	LWT 65 °C
Temperature	TC	TC	TC	TC	TC	TC	TC	TC
-25°C DB	9.50	9.50	9.50	9.50	-	-	-	-
-20°C DB	10.75	10.75	10.75	10.75	10.21	-	-	-
-15°C DB	12.00	12.00	12.00	12.00	11.50	11.50	-	-
-7°C DB	12.00	12.00	12.00	12.00	12.00	12.00	12.00	-
-4°C DB	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00
-2°C DB	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00
2°C DB	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00
7°C DB	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00
10°C DB	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00
15°C DB	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00
18°C DB	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00
20°C DB	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00
35°C DB	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00

HM141MR U34 / HM143MR U34

Outdoor	LWT 30 °C	LWT 35 ℃	LWT 40 °C	LWT 45 °C	LWT 50 °C	LWT 55 ℃	LWT 60 °C	LWT 65 °C
Temperature	TC	TC	TC	TC	TC	TC	TC	TC
-25°C DB	10.00	10.00	10.00	10.00	-	-	-	-
-20°C DB	12.00	12.00	12.00	12.00	11.40	-	-	-
-15°C DB	14.00	14.00	14.00	14.00	13.30	13.30	-	-
-7°C DB	14.00	14.00	14.00	14.00	14.00	14.00	14.00	-
-4°C DB	14.00	14.00	14.00	14.00	14.00	14.00	14.00	14.00
-2°C DB	14.00	14.00	14.00	14.00	14.00	14.00	14.00	14.00
2°C DB	14.00	14.00	14.00	14.00	14.00	14.00	14.00	14.00
7°C DB	14.00	14.00	14.00	14.00	14.00	14.00	14.00	14.00
10°C DB	14.00	14.00	14.00	14.00	14.00	14.00	14.00	14.00
15°C DB	14.00	14.00	14.00	14.00	14.00	14.00	14.00	14.00
18°C DB	14.00	14.00	14.00	14.00	14.00	14.00	14.00	14.00
20°C DB	14.00	14.00	14.00	14.00	14.00	14.00	14.00	14.00
35°C DB	14.00	14.00	14.00	14.00	14.00	14.00	14.00	14.00

HM161MR U34 / HM163MR U34

Outdoor	LWT 30 °C	LWT 35 °C	LWT 40 °C	LWT 45 °C	LWT 50 °C	LWT 55 ℃	LWT 60 °C	LWT 65 °C
Temperature	TC	TC	TC	TC	TC	TC	TC	TC
-25°C DB	10.50	10.50	10.50	10.50	-	-	-	-
-20°C DB	13.25	13.25	13.25	13.25	12.59	-	-	-
-15°C DB	16.00	14.40	14.40	14.40	13.68	13.68	-	-
-7°C DB	16.00	16.00	16.00	16.00	16.00	16.00	16.00	-
-4°C DB	16.00	16.00	16.00	16.00	16.00	16.00	16.00	16.00
-2°C DB	16.00	16.00	16.00	16.00	16.00	16.00	16.00	16.00
2°C DB	16.00	16.00	16.00	16.00	16.00	16.00	16.00	16.00
7°C DB	16.00	16.00	16.00	16.00	16.00	16.00	16.00	16.00
10°C DB	16.00	16.00	16.00	16.00	16.00	16.00	16.00	16.00
15°C DB	16.00	16.00	16.00	16.00	16.00	16.00	16.00	16.00
18°C DB	16.00	16.00	16.00	16.00	16.00	16.00	16.00	16.00
20°C DB	16.00	16.00	16.00	16.00	16.00	16.00	16.00	16.00
35°C DB	16.00	16.00	16.00	16.00	16.00	16.00	16.00	16.00

- 1. DB : Dry Bulb Temperature (°C), LWT : Leaving Water Temperature (°C), LPM : Liters Per Minute (ℓ/\min) , TC : Total Capacity (kW)
- Direct interpolation is permissible. Do not extrapolate.
 Measuring procedure follows EN-14511.

- Rated values are based on standard conditions and it can be found on specifications.
 Above table values may not be matched according to installation condition. Except for rated value, the performance is not guaranteed.
 In accordance with the test standard (or nations), the rating will vary slightly.
- 4. The shaded areas are not guaranteed continuous operation.

Performance Table for Cooling Operation

Maximum Cooling Capacity

HM121MR U34 / HM123MR U34

Outdoor	LWT 7°C	LWT 10°C	LWT 13°C	LWT 15°C	LWT 18°C	LWT 20°C	LWT 22°C
Temperature	TC	TC	TC	TC	TC	TC	TC
10°C DB	12.00	12.00	12.00	12.00	12.00	12.00	12.00
20°C DB	12.00	12.00	12.00	12.00	12.00	12.00	12.00
30°C DB	12.00	12.00	12.00	12.00	12.00	12.00	12.00
35°C DB	12.00	12.00	12.00	12.00	12.00	12.00	12.00
40°C DB	11.05	11.19	11.33	11.43	11.57	11.67	11.76
45°C DB	10.10	10.37	10.64	10.83	11.10	11.28	11.46

HM141MR U34 / HM143MR U34

Outdoor	LWT 7°C	LWT 10°C	LWT 13°C	LWT 15°C	LWT 18°C	LWT 20°C	LWT 22°C
Temperature	TC	TC	TC	TC	TC	TC	TC
10°C DB	12.50	12.80	13.10	13.30	13.60	13.80	14.00
20°C DB	14.00	14.00	14.00	14.00	14.00	14.00	14.00
30°C DB	14.00	14.00	14.00	14.00	14.00	14.00	14.00
35°C DB	14.00	14.00	14.00	14.00	14.00	14.00	14.00
40°C DB	12.35	12.60	12.84	13.01	13.26	13.42	13.59
45°C DB	10.69	11.19	11.69	12.02	12.51	12.84	13.17

HM161MR U34 / HM163MR U34

Outdoor	LWT 7°C	LWT 10°C	LWT 13°C	LWT 15°C	LWT 18°C	LWT 20°C	LWT 22°C
Temperature	TC	TC	TC	TC	TC	TC	TC
10°C DB	13.00	13.60	14.20	14.60	15.20	15.60	16.00
20°C DB	16.00	16.00	16.00	16.00	16.00	16.00	16.00
30°C DB	16.00	16.00	16.00	16.00	16.00	16.00	16.00
35°C DB	16.00	16.00	16.00	16.00	16.00	16.00	16.00
40°C DB	13.60	13.96	14.32	14.56	14.92	15.16	15.40
45°C DB	11.20	11.76	12.32	12.69	13.25	13.62	14.00


- 1. DB: Dry Bulb Temperature (°C), LWT: Leaving Water Temperature (°C), LPM: Liters Per Minute (ℓ/\min) , TC: Total Capacity (kW)
- Direct interpolation is permissible. Do not extrapolate.
 Measuring procedure follows EN-14511.

- Rated values are based on standard conditions and it can be found on specifications.
 Above table values may not be matched according to installation condition. Except for rated value, the performance is not guaranteed.
 In accordance with the test standard (or nations), the rating will vary slightly.
- 4. The shaded areas are not guaranteed continuous operation.


Drawings

	Unit	Model Name					
Category		Capacity (kW)					
		12.0	14.0	16.0			
1 Phase Model 220 ~ 240V, 1Ø, 50Hz	Monobloc Unit	HM121MR U34	HM141MR U34	HM161MR U34			
3 Phase Model 380 ~ 415V, 3Ø, 50Hz		HM123MR U34	HM143MR U34	HM163MR U34			


HM121MR U34 / HM141MR U34 / HM161MR U34 HM123MR U34 / HM143MR U34 / HM163MR U34 [Unit:mm]

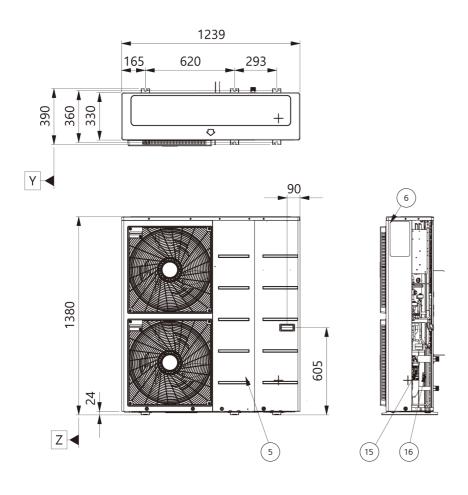

Side View





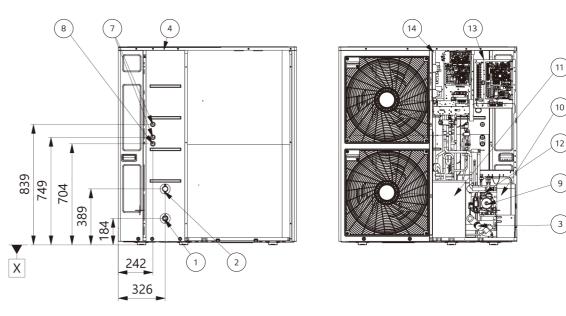

No.	Part Name	Description
1	Entering water pipe	Male PT 1" according to ISO 7-1 (tapered pipe threads)
2	Leaving water pipe	Male PT 1" according to ISO 7-1 (tapered pipe threads)
3	Strainer	Filtering and stacking particles inside circulating water
4	Top cover	-
5	Front Panel	-
6	Side Panel	-
7	Low Voltage	Communication cable hole
8	UNIT Power	Power cable hole
9	Water Pump	GRUNDFOS UPML 20-105 CHBL
10	Plate Heat Exchanger	Heat exchange between refrigerant and water
11	Compressor shield panel	-
12	Safety valve	Open at water pressure 3 bar
13	Indoor Control Box	Indoor PCB and terminal blocks
14	Outdoor Control Box	Outdoor PCB and terminal blocks
15	Flow sensor	SIKA VVX20 5-80 LPM
16	Pressure Sensor	SENSATA 2HMP3-05W 0-2MPa

Electric Backup Heater

HA031M E1 HA061M E1 HA063M E1




Backup Heater Specification

Electrical Spe	cification	Unit	HA031M E1	HA061M E1	HA063M E1			
	Туре	-	Sheath					
	Number of Heating Coil	EA	1	2	3			
	Capacity Combination	kW	3.0	3.0 + 3.0	2.0 + 2.0 + 2.0			
D 1	Heating Steps	Step	1	2	1			
Backup Heater	Power Supply	V, Ø, Hz	220 ~ 2	380 ~ 415, 3, 50				
ricacci	Rated Running Current	А	12.5	25.0	8.7			
	Recommended Circuit Breaker	А	25	40	25			
	Dimensions (W x H x D)	mm		210 x 607 x 217				
	Net Weight (unit)	kg	13.0	13.8	14.1			
Wiring	Power Supply Cable (included earth, H07RN-F)	mm ² x cores	1.5 x 3C	4.0 x 3C	2.5 x 4C			
Connections	Communication Cable (H07RN-F)	mm ² x cores	0.75	x 4C	0.75 x 2C			

Note
1. Due to our policy of innovation some specifications may be changed without notification.
2. Wiring cable size must comply with the applicable local and national codes.

Especially the power cable and circuit breaker should be selected in accordance with that.

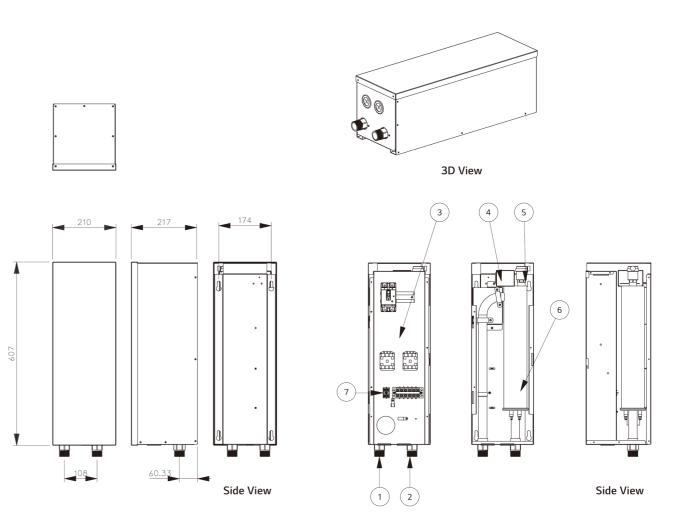





No.	Part Name	Description			
1	Leaving Water Pipe	Male PT 1" according to ISO 7-1 (tapered pipe threads)			
2	Entering Water Pipe Male PT 1" according to ISO 7-1 (tapered pipe threads)				
3	Control Box	Circuit breaker, Magnetic switch, Terminal blocks			
4	Thermal switch	Cut-off power input to E/heater at 90°C			
5	Air vent	Air purging when charging water			
6	Electric Heater	Refer the related information			
7	Backup heater outlet sensor(SI3)	Connect to unit (heat pump)			

THERMA V_m (R32) R32 MONOBLOC





Energy Label



- * 16kW 1Ø model.

Excellent Performance & Efficiency









User Convenience











Easy Installation & Maintenance










R32 Monobloc Introduction

The LG THERMA V R32 Monobloc is a fully packaged unit, where the indoor and outdoor units are combined as one module. This unit does not require refrigerant piping work since the Monobloc's outdoor unit is connected exclusively to water piping. Further, hydronic components such as plate heat exchanger, expansion tank and water pump are included in the package.

Key Components

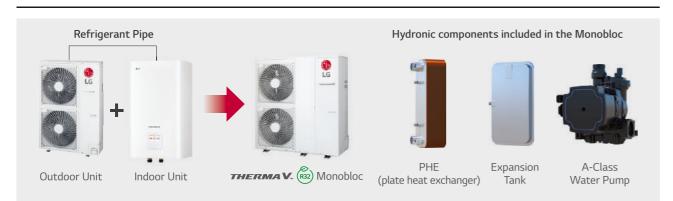




Monobloc Concept

R32 Monobloc is an all-in-one concept and reduced weight allows for quicker and easier installations.

- Additional hydronic components are included in the package
- Easier and quicker installation without refrigerant piping work

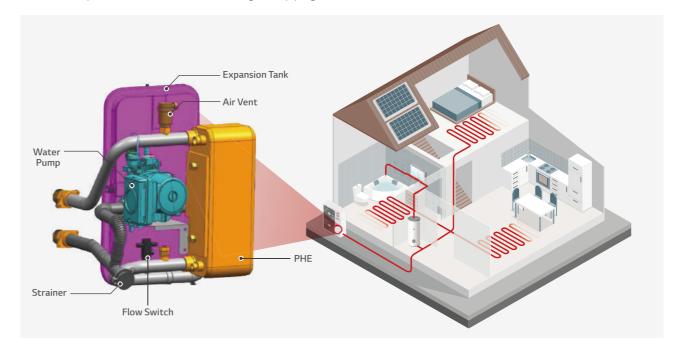

^{*} Detailed description for each function is presented on page 28 ~ 35.

THERMA V_{TM} (R32) MONOBLOC

PRODUCT SPECIFICATION

R32 Monobloc

HM051M U43 HM071M U43 HM091M U43


























Features

- · All-in-one outdoor unit
- SCOP up to 4.45 (Average climate / Low temp. application): A+++ SCOP up to 3.12 (Average climate / Mid temp. application): A+
- COP up to 4.50 (Outdoor air 7°C / Leaving water 35°C)
- 100% heating capacity at -7°C OAT (@ LWT 35°C)
- Wide operation range (ambient: -25 ~ 35°C / water side: 15 ~ 65°C)
- R32 refrigerant with reduced global warming potential (GWP)
- R1 compressor
- Black Fin heat exchanger
- LG ThinQ
- KEYMARK / EHPA (for Austria) / MCS / EUROVENT certification
- * EHPA (for Germany and Switzerland) under renewal of valid date

Model Line-up

		Model Name					
Capacity	Unit	Capacity (kW)					
		5.5	7.0	9.0			
1 Phase Model 220 ~ 240V, 1Ø, 50Hz	Monobloc Unit	HM051M U43	HM071M U43	HM091M U43			

Seasonal Energy

Description	Description			HM051M U43	HM071M U43	HM091M U43
	Average	SCOP	-	4.45	4.45	4.45
	Climate Water	Seasonal Space Heating Efficiency (ηs)	%	175	175	175
Space Heating (According to	Outlet 35°C	Seasonal Space Heating Eff. Class (A+++ to D Scale)	-	A+++	A+++	A+++
EN14825)	Average Climate Water Outlet 55°C	SCOP	-	3.12	3.12	3.12
,		Seasonal Space Heating Efficiency (ηs)	%	122	122	122
		Seasonal Space Heating Eff. Class (A+++ to D Scale)	-	A+	A+	A+

Nominal Capacity and Nominal Power Input

Description		OAT ¹⁾ (DB)	LWT ²⁾ (DB)	Unit	HM051M U43	HM071M U43	HM091M U43
		7°C	35°C		5.50	7.00	9.00
	Heating	7°C	55°C		5.50	5.50	5.50
Nominal Capacity		2°C	35°C	kW	3.30	4.20	5.40
	Cooling	35°C	18°C		5.50	7.00	9.00
		35°C	7°C		5.50	7.00	9.00
	Heating	7°C	35°C	kW	1.22	1.56	2.15
		7°C	55°C		2.04	2.04	2.04
Nominal Power Input		2°C	35°C		0.94	1.20	1.54
	Cooling	35°C	18°C		1.20	1.56	2.14
		35°C	7°C		1.96	2.59	3.46
		7°C	35°C		4.50	4.50	4.18
COP	Heating	7°C	55°C	W/W	2.70	2.70	2.70
		2°C	35°C		3.52	3.51	3.50
EER	Cooling	35°C	18°C	W/W	4.60	4.50	4.20
EEK	Cooling	35°C	7°C	VV/VV	2.80	2.70	2.60

1) OAT : Outdoor Air Temperature

2) LWT: Leaving Water Temperature

Product Specification

Technical Spe	ecification			Unit	HM051M U43	HM071M U43	HM091M U43	
	Operation Range	Heating			15 ~ 65			
	(leaving water	Cooling	Min. ~ Max.	°C DB	5 ~ 27 (16 ~ 27) ¹⁾			
W C. I.	temperature)	DHW				15 ~ 80 ²⁾		
Water Side	Division Community	10/	Inlet	Inch	Male PT 1" accor	ding to ISO 7-1 (tape	red pipe threads)	
	Piping Connections	Water Circuit	Outlet	Inch	Male PT 1" accor	ding to ISO 7-1 (tape	red pipe threads)	
	Rated Water Flow Rate a	t LWT 35°C		LPM	15.8	20.1	25.9	
	Operation Range	Heating	B.41 . B.4 .	0C DD		-25 ~ 35		
	(outdoor temperature)	Cooling	Min ~ Max	°C DB	5 ~ 48			
	C	Quantity		EA	1			
Refrigerant	Compressor	Туре		-	Hermetic Sealed Scroll			
Side		Туре		-	R32			
	B. C	GWP (Global W	arming Potential)	-		675		
	Refrigerant	Precharged Amount		g		1,400		
		t-CO2 eq		-	0.945			
Sound Power I	Level	Heating	Rated	dB(A)	60			
Sound Pressur	re Level (at 1m)	Heating	Rated	dB(A)		50	50	
Dimensions		Unit	W×H×D	mm		1,239 × 834 × 330		
Weight		Unit		kg		88.0		
Exterior		Color / RAL Cod	e	-	V	Varm Gray / RAL 704	14	
		Voltage, Phase,	Frequency	V, Ø, Hz		220-240, 1, 50		
D C 1		Rated Running	Heating	А	5.4	6.9	9.6	
Power Supply		Current	Cooling	А	5.3	6.9	9.5	
		Recommended	Circuit Breaker	А	16	20	25	
		Power Supply C (included earth		mm ² x cores	ores 4.0 x 3C			

1) When fan coil unit not used.

2) DHW 58~80°C Operating is available only when the booster heater is operating.

- Due to our policy of innovation some specifications may be changed without notification.
 Wiring cable size must comply with the applicable local and national codes.
 Especially the power cable and circuit breaker should be selected in accordance with that.

 Sound power level is measured on the rated condition in according with ISO 9614 standard. Sound pressure level is converted from sound power level based on tonality penalty of OdB and installation in free-field. Therefore, these values can be increased owing to ambient conditions during operation. Rated sound power level is according to the EN12102-1 under
- conditions of the EN14825. 4. Performances are accordance with EN14511 and reflect ErP testing conditions. Above gives the declared values at rated conditions acc. ErP regulation. • Rated running current: Outdoor Temp. 7°C DB / 6°CWB, LWT 35°C
- 5. This product contains Fluorinated greenhouse gases.

Performance Table for Heating Operation

Maximum Heating Capacity (Including Defrost Effect)

HM051M U43

Outdoor	LWT 30 °C	LWT 35 °C	LWT 40 °C	LWT 45 °C	LWT 50 °C	LWT 55 ℃	LWT 60 °C	LWT 65 °C
Temperature	TC	TC	TC	TC	TC	TC	TC	TC
-25°C DB	3.79	3.67	3.54	3.42	-	-	-	-
-20°C DB	4.22	4.09	3.96	3.83	3.70	-	-	-
-15°C DB	4.66	4.52	4.38	4.25	4.11	3.97	-	-
-7°C DB	5.50	5.50	5.50	5.50	5.50	5.50	5.50	-
-4°C DB	5.50	5.50	5.50	5.50	5.50	5.50	5.50	5.50
-2°C DB	5.50	5.50	5.50	5.50	5.50	5.50	5.50	5.50
2°C DB	5.50	5.50	5.50	5.50	5.50	5.50	5.50	5.50
7°C DB	5.50	5.50	5.50	5.50	5.50	5.50	5.50	5.50
10°C DB	5.50	5.50	5.50	5.50	5.50	5.50	5.50	5.50
15°C DB	5.50	5.50	5.50	5.50	5.50	5.50	5.50	5.50
18°C DB	5.50	5.50	5.50	5.50	5.50	5.50	5.50	5.50
20°C DB	5.50	5.50	5.50	5.50	5.50	5.50	5.50	5.50
35°C DB	5.50	5.50	5.50	5.50	5.50	5.50	5.50	5.50

HM071M U43

Outdoor	LWT 30 °C	LWT 35 °C	LWT 40 °C	LWT 45 °C	LWT 50 °C	LWT 55 ℃	LWT 60 °C	LWT 65 °C
Temperature	TC	TC	TC	TC	TC	TC	TC	TC
-25°C DB	4.82	4.67	4.51	4.36	-	-	-	-
-20°C DB	5.38	5.21	5.05	4.88	4.72	-	-	-
-15°C DB	5.93	5.76	5.58	5.41	5.23	5.06	-	-
-7°C DB	7.00	7.00	7.00	7.00	7.00	7.00	7.00	-
-4°C DB	7.00	7.00	7.00	7.00	7.00	7.00	7.00	7.00
-2°C DB	7.00	7.00	7.00	7.00	7.00	7.00	7.00	7.00
2°C DB	7.00	7.00	7.00	7.00	7.00	7.00	7.00	7.00
7°C DB	7.00	7.00	7.00	7.00	7.00	7.00	7.00	7.00
10°C DB	7.00	7.00	7.00	7.00	7.00	7.00	7.00	7.00
15°C DB	7.00	7.00	7.00	7.00	7.00	7.00	7.00	7.00
18°C DB	7.00	7.00	7.00	7.00	7.00	7.00	7.00	7.00
20°C DB	7.00	7.00	7.00	7.00	7.00	7.00	7.00	7.00
35°C DB	7.00	7.00	7.00	7.00	7.00	7.00	7.00	7.00

HM091M U43

Outdoor	LWT 30 °C	LWT 35 °C	LWT 40 °C	LWT 45 °C	LWT 50 °C	LWT 55 °C	LWT 60 °C	LWT 65 °C
Temperature	TC							
-25°C DB	6.20	6.00	5.80	5.60	-	-	-	-
-20°C DB	6.91	6.70	6.49	6.28	6.06	-	-	-
-15°C DB	7.63	7.40	7.18	6.95	6.73	6.50	-	-
-7°C DB	9.00	9.00	9.00	9.00	9.00	9.00	9.00	-
-4°C DB	9.00	9.00	9.00	9.00	9.00	9.00	9.00	9.00
-2°C DB	9.00	9.00	9.00	9.00	9.00	9.00	9.00	9.00
2°C DB	9.00	9.00	9.00	9.00	9.00	9.00	9.00	9.00
7°C DB	9.00	9.00	9.00	9.00	9.00	9.00	9.00	9.00
10°C DB	9.00	9.00	9.00	9.00	9.00	9.00	9.00	9.00
15°C DB	9.00	9.00	9.00	9.00	9.00	9.00	9.00	9.00
18°C DB	9.00	9.00	9.00	9.00	9.00	9.00	9.00	9.00
20°C DB	9.00	9.00	9.00	9.00	9.00	9.00	9.00	9.00
35°C DB	9.00	9.00	9.00	9.00	9.00	9.00	9.00	9.00

- 1. DB : Dry Bulb Temperature (°C), LWT : Leaving Water Temperature (°C), LPM : Liters Per Minute (ℓ/\min) , TC : Total Capacity (kW)
- Direct interpolation is permissible. Do not extrapolate.
 Measuring procedure follows EN-14511.

- Rated values are based on standard conditions and it can be found on specifications.
 Above table values may not be matched according to installation condition. Except for rated value, the performance is not guaranteed.
 In accordance with the test standard (or nations), the rating will vary slightly.
- 4. The shaded areas are not guaranteed continuous operation.

Performance Table for Cooling Operation

Maximum Cooling Capacity

HM051M U43

Outdoor	LWT 7°C	LWT 10°C	LWT 13°C	LWT 15°C	LWT 18°C	LWT 20°C	LWT 22°C
Temperature	TC	TC	TC	TC	TC	TC	TC
10°C DB	5.16	5.65	6.14	6.47	6.96	7.29	7.62
20°C DB	5.29	5.59	5.89	6.08	6.38	6.58	6.77
30°C DB	5.43	5.53	5.63	5.69	5.79	5.86	5.92
35°C DB	5.50	5.50	5.50	5.50	5.50	5.50	5.50
40°C DB	5.57	5.50	5.43	5.38	5.31	5.27	5.22
45°C DB	5.64	5.50	5.36	5.27	5.13	5.04	4.94

HM071M U43

Outdoor	LWT 7°C	LWT 10°C	LWT 13°C	LWT 15°C	LWT 18°C	LWT 20°C	LWT 22°C
Temperature	TC	TC	TC	TC	TC	TC	TC TC
10°C DB	6.56	7.19	7.82	8.24	8.86	9.28	9.70
20°C DB	6.74	7.11	7.49	7.74	8.12	8.37	8.62
30°C DB	6.91	7.04	7.16	7.25	7.37	7.46	7.54
35°C DB	7.00	7.00	7.00	7.00	7.00	7.00	7.00
40°C DB	7.09	7.00	6.91	6.85	6.76	6.70	6.65
45°C DB	7.18	7.00	6.82	6.70	6.53	6.41	6.29

HM091M U43

Outdoor	LWT 7°C	LWT 10°C	LWT 13°C	LWT 15°C	LWT 18°C	LWT 20°C	LWT 22°C
Temperature	TC	TC	TC	TC	TC	TC	TC
10°C DB	8.44	9.24	10.05	10.59	11.40	11.93	12.47
20°C DB	8.66	9.15	9.63	9.95	10.44	10.76	11.08
30°C DB	8.89	9.05	9.21	9.32	9.48	9.59	9.69
35°C DB	9.00	9.00	9.00	9.00	9.00	9.00	9.00
40°C DB	9.11	9.00	8.89	8.81	8.70	8.62	8.54
45°C DB	9.23	9.00	8.77	8.62	8.39	8.24	8.09

- 1. DB: Dry Bulb Temperature (°C), LWT: Leaving Water Temperature (°C), LPM: Liters Per Minute (ℓ/\min) , TC: Total Capacity (kW)
- Direct interpolation is permissible. Do not extrapolate.
 Measuring procedure follows EN-14511.

- Rated values are based on standard conditions and it can be found on specifications.
 Above table values may not be matched according to installation condition. Except for rated value, the performance is not guaranteed.
 In accordance with the test standard (or nations), the rating will vary slightly.
- 4. The shaded areas are not guaranteed continuous operation.


[Unit:mm]


PRODUCT SPECIFICATION


Drawings

	Unit	Model Name						
Category		Capacity (kW)						
		5.5	7.0	9.0				
1 Phase Model 220 ~ 240V, 1Ø, 50Hz	Monobloc Unit	HM051M U43	HM071M U43	HM091M U43				


HM051M U43 HM071M U43 HM091M U43 [Unit:mm]



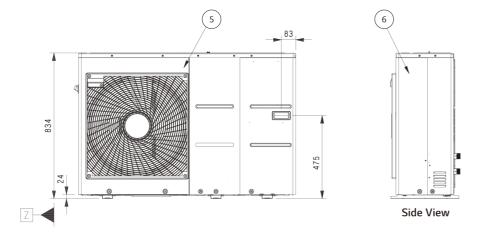





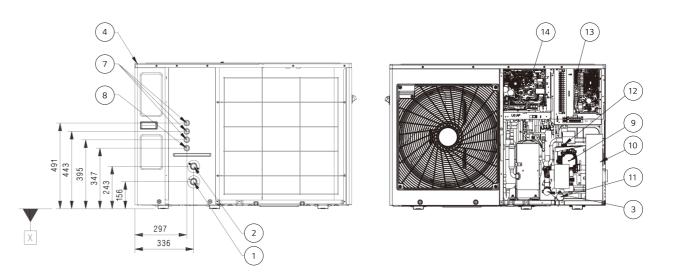

No.	Part Name	Description
1	Entering Water Pipe	Male PT 1" according to ISO 7-1 (tapered pipe threads)
2	Leaving Water Pipe	Male PT 1" according to ISO 7-1 (tapered pipe threads)
3	Strainer	Filtering and stacking particles inside circulating water
4	Top Cover	-
5	Front Panel	-
6	Side Panel	-
7	Low Voltage	Communication cable hole
8	Unit Power	Power cable hole
9	Water Pump	GRUNDFOS UPM3K 20-75 CHBL
10	Plate Heat Exchanger	Heat exchange between refrigerant and water
11	Pressure Gauge	Indicates circulating water pressure
12	Safety Valve	Open at water pressure 3 bar
13	Indoor Control Box	Indoor PCB and terminal blocks
14	Outdoor Control Box	Outdoor PCB and terminal blocks

THERMA V_{TM} (R32) MONOBLOC

PRODUCT SPECIFICATION

R32 Monobloc

HM121M U33 HM141M U33 HM161M U33 HM123M U33 HM143M U33

HM163M U33































Features

· All-in-one outdoor unit

(3Ø model only)

- SCOP up to 4.45 (Average climate / Low temp. application): A+++ SCOP up to 3.12 (Average climate / Mid temp. application): A+
- COP up to 4.50 (Outdoor air 7°C / Leaving water 35°C)
- 100% heating capacity at -7°C OAT (@ LWT 35°C)
- Wide operation range (ambient: -25 ~ 35°C / water side: 15 ~ 65°C)
- R32 refrigerant with reduced global warming potential (GWP)
- R1 compressor
- Black Fin heat exchanger
- LG ThinQ
- KEYMARK / EHPA (for Austria, 3Ø model only) / MCS / EUROVENT certification
- * EHPA (for Germany and Switzerland) under renewal of valid date

Model Line-up

	Unit	Model Name						
Capacity		Capacity (kW)						
		12.0	14.0	16.0				
1 Phase Model 220 ~ 240V, 1Ø, 50Hz	· Monobloc Unit	HM121M U33	HM141M U33	HM161M U33				
3 Phase Model 380 ~ 415V, 3Ø, 50Hz	IVIOLIODIOC OLIIC	HM123M U33	HM143M U33	HM163M U33				

Seasonal Energy

Description			Unit	HM121M U33 (1Ø) HM123M U33 (3Ø)	HM141M U33 (1Ø) HM143M U33 (3Ø)	HM161M U33 (1Ø) HM163M U33 (3Ø)
	Average	SCOP	-	4.45	4.45	4.45
	Climate Water Outlet 35°C	Seasonal Space Heating Efficiency (ηs)	%	175	175	175
Space Heating (According to		Seasonal Space Heating Eff. Class (A+++ to D Scale)	-	A+++	A+++	A+++
EN14825)	Average	SCOP	-	3.18	3.18	3.18
,	Climate Water Outlet 55°C	Seasonal Space Heating Efficiency (ηs)	%	124	124	124
		Seasonal Space Heating Eff. Class (A+++ to D Scale)	-	A+	A+	A+

Nominal Capacity and Nominal Power Input

Description		OAT ¹⁾	LWT ²⁾	Unit	HM121M U33 (1Ø)	HM141M U33 (1Ø)	HM161M U33 (1Ø)
Description		(DB)	(DB)	Unit	HM123M U33 (3Ø)	HM143M U33 (3Ø)	HM163M U33 (3Ø)
		7°C	35°C		12.00	14.00	16.00
Nominal Capacity	Heating	7°C	55°C		12.00	12.00	12.00
		2°C	35°C	kW	11.00	12.00	13.80
	Cooling	35°C	18°C		12.00	14.00	16.00
	Cooling	35°C	7°C		12.00	14.00	16.00
	Heating	7°C	35°C		2.61	3.11	3.64
		7°C	55°C	kW	4.29	4.29	4.29
Nominal Power Input		2°C	35°C		3.13	3.42	3.94
	C - I'	35°C	18°C		2.61	3.26	4.00
	Cooling	35°C	7°C		4.44	5.38	6.40
		7°C	35°C		4.60	4.50	4.40
COP	Heating	7°C	55°C	W/W	2.80	2.80	2.80
		2°C	35°C		3.52	3.51	3.50
EER	Cooling	35°C	18°C	W/W	4.60	4.30	4.00
EEK	Cooling	35°C	7°C	VV/ VV	2.70	2.60	2.50

1) OAT : Outdoor Air Temperature 2) LWT : Leaving Water Temperature

Product Specification

Technical S	Specification			Unit	HM121M U33	HM141M U33	HM161M U33	HM123M U33	HM143M U33	HM163M U3		
	Operation Range	Heating			15 ~ 65							
	(leaving water	Cooling	Min. ~ Max.	°C DB	5 ~ 27 (16 ~ 27) ¹⁾							
Water	temperature)	DHW					15 ~	802)				
Side	Piping	Water	Inlet	Inch		Male PT 1" ad	ccording to ISC	7-1 (tapered	pipe threads)			
	Connections	Circuit	Outlet	Inch		Male PT 1" ad	ccording to ISC	7-1 (tapered	pipe threads)			
	Rated Water Flow	Rated Water Flow Rate at LWT 35°C			34.5	40.3	46.0	34.5	40.3	46.0		
	Operation Range	Heating	Min. ~ Max.	°C DB			-25	~ 35				
	(outdoor temp.)	Cooling	IVIIII. ~ IVIAX.	CDB	5 ~ 48							
	Compressor	Quantity		EA		1						
Refrigerant	Compressor	Туре		-	Hermetic Sealed Scroll							
Side		Туре		-	R32							
	Refrigerant	GWP (global war	ming potential)	-			67	75				
		Precharged Amo	unt	g			2,4	00				
		t-CO ₂ eq		-	1.620							
Sound Powe	er Level	Heating	Rated	dB(A)	63							
Sound Press	sure Level (at 1m)	Heating	Rated	dB(A)			5	2				
Dimensions		Unit	WxHxD	mm			1,239 × 8	34 × 330				
Weight		Unit		kg			12	4.5				
Exterior		Color / RAL Coo	de	-			Warm Gray	/ RAL 7044				
		Voltage, Phase,	Frequency	V, Ø, Hz		220-240, 1, 5	0		380-415, 3, 50)		
Power Supp	dv	Rated Running	Heating	Α	11.6	13.8	16.1	3.8	4.6	5.4		
rower supp	ity	Current	Cooling	Α	11.6	14.4	17.7	3.8	4.8	5.9		
		Recommended C	ircuit Breaker	Α		40			16			
Wiring Connections Power Supply Cable (included earth, H07RN-F)		mm ² x cores	6.0 x 3C			4.0 x 5C						

1) When fan coil unit not used.

2) DHW 58~80°C Operating is available only when the booster heater is operating.

- Due to our policy of innovation some specifications may be changed without notification.
 Wiring cable size must comply with the applicable local and national codes.
 Especially the power cable and circuit breaker should be selected in accordance with that.
- 3. Sound power level is measured on the rated condition in according with ISO 9614 standard.
- Sound pressure level is converted from sound power level based on tonality penalty of OdB and installation in free-field.

 Therefore, these values can be increased owing to ambient conditions during operation. Rated sound power level is according to the EN12102-1 under conditions of the EN14825.
- 4. Performances are accordance with EN14511 and reflect ErP testing conditions. Above gives the declared values at rated conditions acc. ErP regulation.

 Rated running current: Outdoor Temp. 7°C DB / 6°CWB, LWT 35°C
- 5. This product contains Fluorinated greenhouse gases.

Performance Table for Heating Operation

Maximum Heating Capacity (Including Defrost Effect)

HM121M U33 / HM123M U33

Outdoor	LWT 30 °C	LWT 35 ℃	LWT 40 °C	LWT 45 °C	LWT 50 °C	LWT 55 ℃	LWT 60 °C	LWT 65 °C
Temperature	TC	TC	TC	TC	TC	TC	TC	TC
-25°C DB	8.75	8.50	8.25	8.00	-	-	-	-
-20°C DB	10.13	10.00	9.88	9.75	9.63	-	-	-
-15°C DB	11.50	11.50	11.50	11.50	11.50	11.50	-	-
-7°C DB	12.00	12.00	12.00	12.00	12.00	12.00	12.00	-
-4°C DB	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00
-2°C DB	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00
2°C DB	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00
7°C DB	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00
10°C DB	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00
15°C DB	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00
18°C DB	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00
20°C DB	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00
35°C DB	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00

HM141M U33 / HM143 U33

Outdoor	LWT 30 °C	LWT 35 °C	LWT 40 °C	LWT 45 °C	LWT 50 °C	LWT 55 °C	LWT 60 °C	LWT 65 °C
Temperature	TC							
-25°C DB	9.25	9.00	8.75	8.50	-	-	-	-
-20°C DB	10.63	10.50	10.38	10.25	10.13	-	-	-
-15°C DB	12.00	12.00	12.00	12.00	12.00	12.00	-	-
-7°C DB	14.00	14.00	14.00	14.00	14.00	14.00	14.00	-
-4°C DB	14.00	14.00	14.00	14.00	14.00	14.00	14.00	14.00
-2°C DB	14.00	14.00	14.00	14.00	14.00	14.00	14.00	14.00
2°C DB	14.00	14.00	14.00	14.00	14.00	14.00	14.00	14.00
7°C DB	14.00	14.00	14.00	14.00	14.00	14.00	14.00	14.00
10°C DB	14.00	14.00	14.00	14.00	14.00	14.00	14.00	14.00
15°C DB	14.00	14.00	14.00	14.00	14.00	14.00	14.00	14.00
18°C DB	14.00	14.00	14.00	14.00	14.00	14.00	14.00	14.00
20°C DB	14.00	14.00	14.00	14.00	14.00	14.00	14.00	14.00
35°C DB	14.00	14.00	14.00	14.00	14.00	14.00	14.00	14.00

HM161M U33 / HM163 U33

Outdoor	LWT 30 °C	LWT 35 °C	LWT 40 °C	LWT 45 °C	LWT 50 °C	LWT 55 ℃	LWT 60 °C	LWT 65 °C
Temperature	TC	TC	TC	TC	TC	TC	TC	TC
-25°C DB	10.50	10.00	9.50	9.00	-	-	-	-
-20°C DB	12.30	11.75	11.44	11.13	10.75	-	-	-
-15°C DB	14.10	13.50	13.38	13.25	13.13	13.00	-	-
-7°C DB	16.00	16.00	16.00	16.00	16.00	16.00	16.00	-
-4°C DB	16.00	16.00	16.00	16.00	16.00	16.00	16.00	16.00
-2°C DB	16.00	16.00	16.00	16.00	16.00	16.00	16.00	16.00
2°C DB	16.00	16.00	16.00	16.00	16.00	16.00	16.00	16.00
7°C DB	16.00	16.00	16.00	16.00	16.00	16.00	16.00	16.00
10°C DB	16.00	16.00	16.00	16.00	16.00	16.00	16.00	16.00
15°C DB	16.00	16.00	16.00	16.00	16.00	16.00	16.00	16.00
18°C DB	16.00	16.00	16.00	16.00	16.00	16.00	16.00	16.00
20°C DB	16.00	16.00	16.00	16.00	16.00	16.00	16.00	16.00
35°C DB	16.00	16.00	16.00	16.00	16.00	16.00	16.00	16.00

- 1. DB: Dry Bulb Temperature (°C), LWT: Leaving Water Temperature (°C), LPM: Liters Per Minute (\(\ell \)/min), TC: Total Capacity (kW) 2. Direct interpolation is permissible. Do not extrapolate.

 3. Measuring procedure follows EN-14511.

- Rated values are based on standard conditions and it can be found on specifications.
 Above table values may not be matched according to installation condition. Except for rated value, the performance is not guaranteed.
 In accordance with the test standard (or nations), the rating will vary slightly.
- 4. The shaded areas are not guaranteed continuous operation.

Performance Table for Cooling Operation

Maximum Cooling Capacity

HM121M U33 / HM123M U33

Outdoor	LWT 7°C	LWT 10°C	LWT 13°C	LWT 15°C	LWT 18°C	LWT 20°C	LWT 22°C
Temperature	TC	TC	TC	TC	TC	TC	TC
10°C DB	11.25	12.33	13.40	14.12	15.20	15.91	16.63
20°C DB	11.55	12.20	12.84	13.27	13.92	14.35	14.78
30°C DB	11.85	12.07	12.28	12.42	12.64	12.78	12.93
35°C DB	12.00	12.00	12.00	12.00	12.00	12.00	12.00
40°C DB	12.15	12.00	11.85	11.75	11.59	11.49	11.39
45°C DB	12.30	12.00	11.69	11.49	11.19	10.99	10.78

HM141M U33 / HM143 U33

Outdoor Temperature	LWT 7°C TC	LWT 10°C TC	LWT 13°C TC	LWT 15°C TC	LWT 18°C TC	LWT 20°C TC	LWT 22°C TC
10°C DB	13.13	14.38	15.64	16.47	17.73	18.57	19.40
20°C DB	13.48	14.23	14.98	15.48	16.24	16.74	17.24
30°C DB	13.83	14.08	14.33	14.49	14.75	14.91	15.08
35°C DB	14.00	14.00	14.00	14.00	14.00	14.00	14.00
40°C DB	14.18	14.00	13.82	13.70	13.53	13.41	13.29
45°C DB	14.35	14.00	13.64	13.41	13.05	12.82	12.58

HM161M U33 / HM163 U33

Outdoor	LWT 7°C	LWT 10°C	LWT 13°C	LWT 15°C	LWT 18°C	LWT 20°C	LWT 22°C
Temperature	TC	TC	TC	TC	TC	TC	TC
10°C DB	15.00	16.43	17.87	18.83	20.26	21.22	22.17
20°C DB	15.40	16.26	17.12	17.70	18.56	19.13	19.70
30°C DB	15.80	16.09	16.37	16.57	16.85	17.04	17.23
35°C DB	16.00	16.00	16.00	16.00	16.00	16.00	16.00
40°C DB	16.20	16.00	15.80	15.66	15.46	15.32	15.19
45°C DB	16.40	16.00	15.59	15.32	14.92	14.65	14.38

- 1. DB: Dry Bulb Temperature (°C), LWT: Leaving Water Temperature (°C), LPM: Liters Per Minute (ℓ/\min) , TC: Total Capacity (kW)
- Direct interpolation is permissible. Do not extrapolate.
 Measuring procedure follows EN-14511.

- Rated values are based on standard conditions and it can be found on specifications.
 Above table values may not be matched according to installation condition. Except for rated value, the performance is not guaranteed.
 In accordance with the test standard (or nations), the rating will vary slightly.
- 4. The shaded areas are not guaranteed continuous operation.


THERMA V_{TM} (R32) MONOBLOC


PRODUCT SPECIFICATION


Drawings

	Unit	Model Name						
Category		Capacity (kW)						
		12.0	14.0	16.0				
1 Phase Model 220 ~ 240V, 1Ø, 50Hz	Monobloc Unit	HM121M U33	HM141M U33	HM161M U33				
3 Phase Model 380 ~ 415V, 3Ø, 50Hz	WIGHODIOC OTHE	HM123M U33	HM143M U33	HM163M U33				

HM121M U33 / HM141M U33 / HM161M U33 HM123M U33 / HM143M U33 / HM163M U33 [Unit:mm]

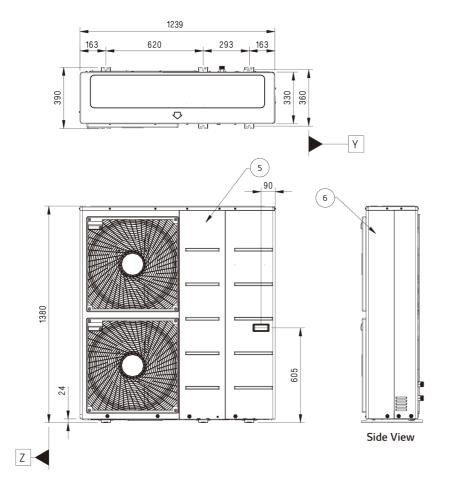



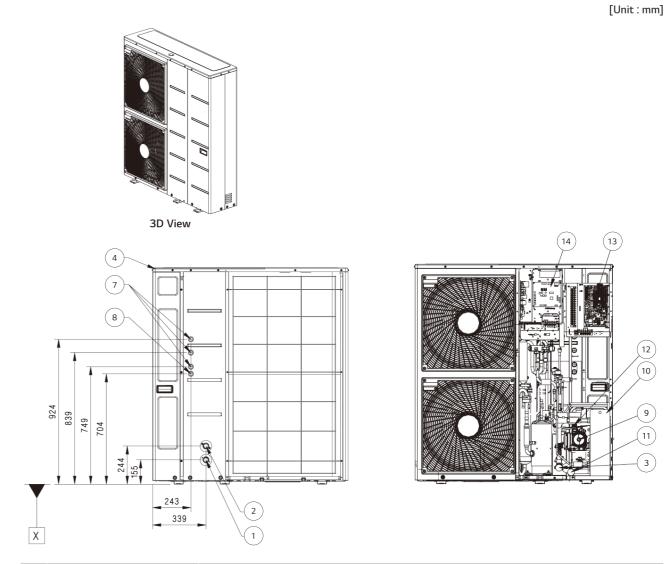

No.	Part Name	Description			
1	Entering Water Pipe	Male PT 1" according to ISO 7-1 (tapered pipe threads)			
2	Leaving Water Pipe	Male PT 1" according to ISO 7-1 (tapered pipe threads)			
3	Strainer	Filtering and stacking particles inside circulating water			
4	Top Cover	-			
5	Front Panel	-			
6	Side Panel	-			
7	Low Voltage	Communication cable hole			
8	UNIT Power	Power cable hole			
9	Water Pump	GRUNDFOS UPML 20-105 CHBL			
10	Plate Heat Exchanger	Heat exchange between refrigerant and water			
11	Pressure Gauge	Indicates circulating water pressure			
12	Safety Valve	Open at water pressure 3 bar			
13	Indoor Control Box	Indoor PCB and terminal blocks			
14	Outdoor Control Box	Outdoor PCB and terminal blocks			

THERMA V_{TM} (R32) MONOBLOC

PRODUCT SPECIFICATION

Electric Backup Heater

HA031M E1 HA061M E1 HA063M E1



Product Specification

Electrical Specification		Unit	HA031M E1	HA061M E1	HA063M E1	
	Туре	-	Sheath			
	Number of Heating Coil	EA	1	2	3	
	Capacity Combination	kW	3.0	3.0 + 3.0	2.0 + 2.0 + 2.0	
5 1	Heating Steps	Step	1	2	1	
Backup Heater	Power Supply	V, Ø, Hz	220 ~ 240, 1, 50		380 ~ 415, 3, 50	
ricater	Rated Running Current	А	12.5	25.0	8.7	
	Recommended Circuit Breaker	А	25	40	25	
	Dimensions (W x H x D)	mm	210 x 607 x 217			
	Net Weight (unit)	kg	13.0	13.8	14.1	
Wiring	Power Supply Cable (included earth, H07RN-F)	mm ² x cores	1.5 x 3C	4.0 x 3C	2.5 x 4C	
Connections	Communication Cable (H07RN-F)	mm ² x cores	0.75	x 4C	0.75 x 2C	

Note
1. Due to our policy of innovation some specifications may be changed without notification.
2. Wiring cable size must comply with the applicable local and national codes.
Especially the power cable and circuit breaker should be selected in accordance with that.

[Unit:mm] 3D View Side View




No.	Part Name	Description			
1	Leaving Water Pipe	Male PT 1" according to ISO 7-1 (tapered pipe threads)			
2	Entering Water Pipe	Male PT 1" according to ISO 7-1 (tapered pipe threads)			
3	Control Box	Circuit breaker, Magnetic switch, Terminal blocks			
4	Thermal Switch	Cut-off power input to E/heater at 90°C			
5	Air Vent	Air purging when charging water			
6	Electric Heater Refer the related information				
7	Backup Heater Outlet Sensor (S13)	Connect to unit (heat pump)			


THERMA V_m (R32)

R32 HYDROSPLIT HYDRO BOX





Energy Label



- * 16kW 3Ø model

Excellent Performance & Efficiency











User Convenience













Easy Installation & Maintenance








R32 Hydrosplit Hydro Box Introduction

The LG THERMA V Hydrosplit series separates the Indoor unit (IDU) and outdoor unit (ODU), connecting them via water pipes. The unit's heat exchanger is located within the ODU, reducing the risk of indoor refrigerant leakage. THERMA V R32 Hydrosplit Hydro Box is a solution providing space heating and cooling with high installation flexibility thanks to the characteristic of being a wall mounted type.

Key Components



- 1 RS3 Remote Controller (attached on the front panel)
- 2 Flow sensor (SIKA)
- **3** Water pressure sensor (SENSATA)
- 4 Air vent valve
- **5** Backup electric heater (6kW, accessory)
- **6** Water pump (GRUNDFOS)
- 7 Expansion vessel (8L)
- 8 Strainer
- A Heating circuit outlet pipe (male PT 1")
- B Heating circuit inlet pipe (male PT 1")
- Outlet pipe to outdoor unit (male PT 1")
- Inlet pipe from outdoor unit (male PT 1")


Hydrosplit Concept

The THERMA V R32 Hydrosplit Hydro Box connects an IDU and ODU by water pipes due to the heat exchanger's location in the outdoor unit, thus reducing the risk of indoor refrigerant leakage.



No Risk of Indoor Refrigerant Leakage

As there is no refrigerant inside of room, no need to consider minimum floor area requirement for IDU due to R32 refrigerant. As a result, it is possible to expand living area more for other purpose.

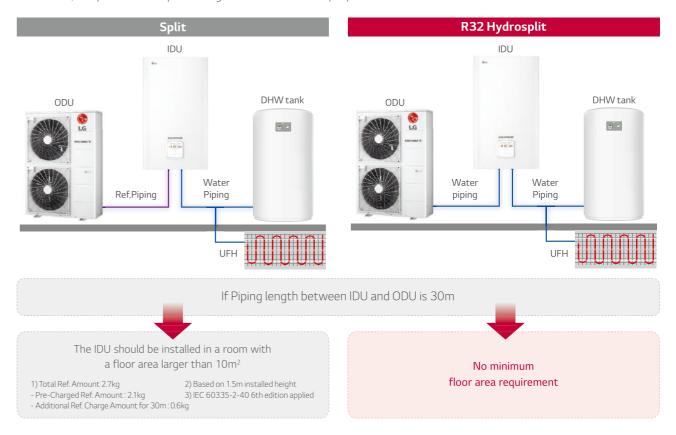

^{*} Detailed description for each function is presented on page 28 ~ 35.

THERMA V... (R32) HYDROSPLIT HYDRO BOX

PRODUCT SPECIFICATION

R32 Hydrosplit Hydro Box

Indoor Unit

HN1600MC NK1

Outdoor Unit

HU121MRB U30 / HU123MRB U30 HU141MRB U30 / HU143MRB U30 HU161MRB U30 / HU163MRB U30

























Features

- Water pipes connects IDU & ODU
- SCOP up to 4.60 (Average climate / Low temp. application): A+++ SCOP up to 3.50 (Average climate / Mid temp. application): A++
- COP up to 5.04 (Outdoor air 7°C / Leaving water 35°C)
- 100% heating capacity at -7°C OAT (@ LWT 35°C)
- Wide operation range (ambient: -25 ~ 35°C / water side: 15 ~ 65°C)
- Built-in water flow & pressure sensors to monitor real-time water circuit
- R32 refrigerant with reduced global warming potential (GWP)
- R1 compressor
- Black Fin heat exchanger
- LG ThinQ
- KEYMARK / EHPA (for Germany, Austria) / MCS / EUROVENT certification
- * Only the outdoor units are registered in EHPA certification.

Model Line-up

			Model Name						
Category	Unit		Capacity (kW)						
		12.0	14.0	16.0					
1 Phase Model	Outdoor Unit	HU121MRB U30	HU141MRB U30	HU161MRB U30					
220 ~ 240V, 1Ø, 50Hz	Indoor Unit	HN1600MC NK1							
3 Phase Model 380 ~ 415V, 3Ø, 50Hz	Outdoor Unit	HU123MRB U30	HU143MRB U30	HU163MRB U30					
	Indoor Unit	HN1600MC NK1							

Seasonal Energy

Description	Description			HU121MRB U30 (1Ø) HU123MRB U30 (3Ø)		• • • • • • • • • • • • • • • • • • • •			
			Indoor Unit		HN1600MC NK1				
	Average	SCOP	-	4.60	4.57	4.55			
Space	Climate Water	Seasonal Space Heating Efficiency (ηs)	%	181	180	179			
Heating	Outlet 35°C	Seasonal Space Heating Eff. Class (A+++ to D scale)	-	A+++	A+++	A+++			
(according	Average	SCOP	-	3.50	3.47	3.45			
to EN14825)	Climate Water	Seasonal Space Heating Efficiency (ηs)	%	137	136	135			
	Outlet 55°C	Seasonal Space Heating Eff. Class (A+++ to D scale)	-	A++	A++	A++			

Nominal Capacity and Nominal Power Input

				Outdoor Unit	HU121MRB U30 (1Ø)	HU141MRB U30 (1Ø)	HU161MRB U30 (1Ø)
Description		OAT (DB)	LWT (DB)	Outdoor Offic	HU123MRB U30 (3Ø)	HU143MRB U30 (3Ø)	HU163MRB U30 (3Ø)
				Indoor Unit		HN1600MC NK1	
		7°C	35°C		12.00	14.00	16.00
	Heating	7°C	55°C		11.00	11.50	12.00
Nominal Capacity		2°C	35°C	kW	11.00	12.00	13.80
	Cooling	35°C	18°C		12.00	14.00	16.00
	Cooling	35°C	7°C		12.00	14.00	16.00
		7°C	35°C	kW	2.38	2.86	3.33
		7°C	55°C		3.79	4.04	4.29
Nominal Power Input		2°C	35°C		3.01	3.31	3.83
Tower input	Cooling	35°C	18°C		2.53	3.26	4.00
	Cooling	35°C	7°C		4.44	5.38	6.40
		7°C	35°C		5.04	4.89	4.80
COP	Heating	7°C	55°C	W/W	2.90	2.85	2.80
		2°C	35°C		3.65	3.63	3.60
EED	Cooling	35°C	18°C	10//10/	4.75	4.30	4.00
ER	Cooling	35°C	7°C	W/W	2.70	2.60	2.50

R32 Hydrosplit Hydro Box

Product Specification (Outdoor Unit)

Technical Specification	n		Unit	HU121MRB U30	HU141MRB U30	HU161MRB U30	HU123MRB U30	HU143MRB U30	HU163MRB U30	
Operation Range	Heating	Min. ~ Max.	°C DB			-25	~ 35			
(outdoor temp.)	Cooling	IVIIII. ~ IVIAX.	CDB	5 ~ 48						
Compressor	Quantity		EA			1	I			
Compressor	Туре		-			Hermetic S	ealed Scroll			
	Туре		-			R3	32			
Refrigerant	GWP (global warming potential)		-			67	75			
Remgerant	Precharged Amount		g			2,1	00			
	t-CO ₂ eq	-			1.4	18				
Dining Connections	Water Circuit Inlet		mm (inch)	Male PT 1" according to ISO 7-1 (tapered pipe threads)						
Piping Connections	vvater Circuit	Outlet	mm (inch)		Male PT 1" according to ISO 7-1 (tapered pipe threads)					
Rated Water Flow Rate	(at LWT 35°C)		LPM	34.5	40.3	46.0	34.5	40.3	46.0	
Sound Power Level	Heating	Rated	dB(A)	61	62	63	61	62	63	
Sound Pressure Level (at 1m)	Heating	Rated	dB(A)	53	54	55	53	54	55	
Dimensions	Unit	WxHxD	mm			950 × 1,3	80 × 330			
Weight	Unit		kg			91	1.7			
Exterior	Color / RAL Code		-			Warm Gray	/ RAL 7044			
	Voltage, Phase, Frequ	iency	V, Ø, Hz		220-240, 1, 50	0		380-415, 3, 50)	
Douge Cumply	Rated	Heating	А	10.6	12.7	14.8	3.5	4.2	4.9	
Power Supply	Running Current	Cooling	А	11.2	14.4	17.7	3.7	4.8	5.9	
	Recommended Circui	t Breaker	А	40 16			16			
Wiring Connections	Power Supply Cable (includ	ed earth, H07RN-F)	mm ² x cores		6.0 x 3C			2.5 x 5C		

Note

- 1. Due to our policy of innovation some specifications may be changed without notification.
- Wiring cable size must comply with the applicable local and national codes.Especially the power cable and circuit breaker should be selected in accordance with that.
- 3. Sound power level is measured on the rated condition in according with ISO 9614 standard.
- Sound pressure level is converted from sound power level based on tonality penalty of OdB and installation in free-field.
- Therefore, these values can be increased owing to ambient conditions during operation. Rated sound power level is according to the EN12102-1 under conditions of the EN14825.
- 4. Performances are based on the following conditions (It is according to EN14511):
- Interconnected Pipe Length is standard length and difference of Elevation 5. This product contains Fluorinated greenhouse gases. (Outdoor ~ Indoor Unit) is 0m.

Product Specification (Indoor Unit)

Technical Specification	n		Unit	HN1600MC NK1
O	Heating			15 ~ 65
Operation Range (leaving water)	Cooling	Min. ~ Max.	°C DB	5 ~ 27 (16 ~ 27) ¹⁾
(leaving water)	DHW			15 ~ 80 ²⁾
Flow Sensor	Measuring Range	Min. ~ Max.	ℓ/min	5 ~ 80
Water Pressure Sensor	Measuring Range Min. ~ Max.		bar(G)	0 ~ 20
Expansion Vessel	Volume		l	8
Safety Valve	Pressure Limit	Upper limit	bar	3
		Outlet to Heat Load		Male PT 1" according to ISO 7-1 (tapered pipe threads)
Piping Connections	Water Circuit	Inlet from Heat Load	Inch	Male PT 1" according to ISO 7-1 (tapered pipe threads)
riping Connections	vvater Circuit	Outlet to Outdoor Unit	IIICII	Male PT 1" according to ISO 7-1 (tapered pipe threads)
		Inlet from Outdoor Unit		Male PT 1" according to ISO 7-1 (tapered pipe threads)
Wiring Connections	Power and Communication Ca	able (included earth, H07RN-F)	mm ² x cores	0.75 x 4C
Sound Power Level	Heating	Rated	dB(A)	44
Dimensions	Unit	WxHxD	mm	490 × 850 × 315
Weight	Unit		kg	30.5
Exterior	Color / RAL Code		-	Noble White / RAL 9016


- 1) When fan coil unit not used.
- 2) DHW 58-80°C Operating is available only when the booster heater is operating.

Note

- 1. Due to our policy of innovation some specifications may be changed without notification.
- 2. Wiring cable size must comply with the applicable local and national codes.
- Especially the power cable and circuit breaker should be selected in accordance with that.
- 3. Sound power level is measured on the rated condition in according with ISO 9614 standard. Sound pressure level is converted from sound power level based on tonality penalty of 0dB and installation in free-field. Therefore, these values can be increased owing to ambient conditions during operation. Rated sound power level is according to the EN12102-1 under conditions of the EN14825.
- 4. This product contains Fluorinated greenhouse gases.

Accessory Parts (Optional Accessory)

Backup Heater¹⁾

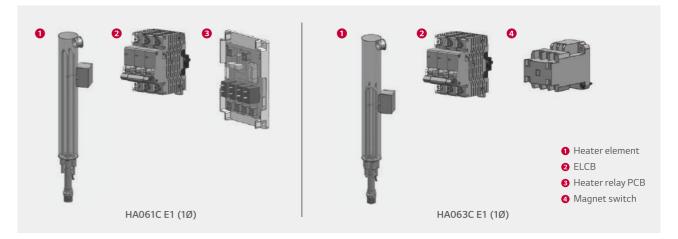

Electrical Specificat	ion		HA061C E1 (1Ø)	HA063C E1 (1Ø)	
	Туре	-	Sheath		
	No. of Heating Coil	EA	2	3	
	Max. Power Consumption	kW	3.0 + 3.0	2.0 + 2.0 + 2.0	
Backup Heater	Heating Step	Step	1	1	
	Power Supply	V, Ø, Hz	220 ~ 240, 1, 50	380 ~ 415, 3, 50	
	Current (rated)	А	24.0	8.7	
	Circuit Breaker (ELCB)	А	40	20	
Wiring Connection	Power Cable (included earth, H07RN-F)	mm ² x cores	6.0 x 3C	2.5 x 5C	

Accessory Parts (Separately Provided)

Strainer



Technical Specifica	ntion	Details				
Material	Body	Brass				
Material	Mesh	Stainless steel (STS304)				
Mesh	Mesh No.	30				
Mesti	Max. Particle Size	0.6mm				
Piping Connection		Female G 1" according to ISO 228-1				

Performance Table for Heating Operation

Maximum Heating Capacity (Including Defrost Effect)

HU121MRB U30 / HU123MRB U30 + HN1600MC NK1

Outdoor	LWT 30 °C	LWT 35 ℃	LWT 40 °C	LWT 45 °C	LWT 50 °C	LWT 55 ℃	LWT 60 °C	LWT 65 °C
Temperature	TC	TC	TC	TC	TC	TC	TC	TC
-25°C DB	9.66	8.85	8.42	8.29	-	-	-	-
-20°C DB	10.13	10.00	9.88	9.75	9.63	-	-	-
-15°C DB	11.50	11.50	11.50	11.50	11.50	11.50	-	-
-7°C DB	12.00	12.00	12.00	12.00	12.00	12.00	12.00	-
-4°C DB	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00
-2°C DB	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00
2°C DB	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00
7°C DB	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00
10°C DB	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00
15°C DB	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00
18°C DB	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00
20°C DB	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00
35°C DB	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00

HU141MRB U30 / HU143MRB U30 + HN1600MC NK1

Outdoor	LWT 30 °C	LWT 35 ℃	LWT 40 °C	LWT 45 °C	LWT 50 °C	LWT 55 ℃	LWT 60 °C	LWT 65 °C
Temperature	TC	TC	TC	TC	TC	TC	TC	TC
-25°C DB	10.04	9.21	8.76	8.62	-	-	-	-
-20°C DB	11.82	11.25	10.95	10.67	10.59	-	-	-
-15°C DB	12.52	12.90	13.26	12.88	12.81	12.63	-	-
-7°C DB	14.00	14.00	14.00	14.00	14.00	14.00	14.00	-
-4°C DB	14.00	14.00	14.00	14.00	14.00	14.00	14.00	14.00
-2°C DB	14.00	14.00	14.00	14.00	14.00	14.00	14.00	14.00
2°C DB	14.00	14.00	14.00	14.00	14.00	14.00	14.00	14.00
7°C DB	14.00	14.00	14.00	14.00	14.00	14.00	14.00	14.00
10°C DB	14.00	14.00	14.00	14.00	14.00	14.00	14.00	14.00
15°C DB	14.00	14.00	14.00	14.00	14.00	14.00	14.00	14.00
18°C DB	14.00	14.00	14.00	14.00	14.00	14.00	14.00	14.00
20°C DB	14.00	14.00	14.00	14.00	14.00	14.00	14.00	14.00
35°C DB	14.00	14.00	14.00	14.00	14.00	14.00	14.00	14.00

HU161MRB U30 / HU163MRB U30 + HN1600MC NK1

Outdoor	LWT 30 °C	LWT 35 °C	LWT 40 °C	LWT 45 °C	LWT 50 °C	LWT 55 °C	LWT 60 °C	LWT 65 °C
Temperature	TC							
-25°C DB	10.98	10.00	9.50	9.33	-	-	-	-
-20°C DB	13.43	12.54	12.03	11.78	11.47	-	-	-
-15°C DB	14.23	14.39	14.50	13.95	13.86	13.12	-	-
-7°C DB	16.00	16.00	16.00	16.00	16.00	16.00	16.00	-
-4°C DB	16.00	16.00	16.00	16.00	16.00	16.00	16.00	16.00
-2°C DB	16.00	16.00	16.00	16.00	16.00	16.00	16.00	16.00
2°C DB	16.00	16.00	16.00	16.00	16.00	16.00	16.00	16.00
7°C DB	16.00	16.00	16.00	16.00	16.00	16.00	16.00	16.00
10°C DB	16.00	16.00	16.00	16.00	16.00	16.00	16.00	16.00
15°C DB	16.00	16.00	16.00	16.00	16.00	16.00	16.00	16.00
18°C DB	16.00	16.00	16.00	16.00	16.00	16.00	16.00	16.00
20°C DB	16.00	16.00	16.00	16.00	16.00	16.00	16.00	16.00
35°C DB	16.00	16.00	16.00	16.00	16.00	16.00	16.00	16.00

- 1. DB : Dry Bulb Temperature (°C), LWT : Leaving Water Temperature (°C), LPM : Liters Per Minute (ℓ/\min) , TC : Total Capacity (kW)
- Direct interpolation is permissible. Do not extrapolate.
 Measuring procedure follows EN-14511.
- Rated values are based on standard conditions and it can be found on specifications.
- Above table values may not be matched according to installation condition. Except for rated value, the performance is not guaranteed.
 In accordance with the test standard (or nations), the rating will vary slightly.
- 4. The shaded areas are not guaranteed continuous operation.

Performance Table for Cooling Operation

Maximum Cooling Capacity

HU121MRB U30 / HU123MRB U30 + HN1600MC NK1

Outdoor	LWT 7°C	LWT 10°C	LWT 13°C	LWT 15°C	LWT 18°C	LWT 20°C	LWT 22°C
Temperature	TC	TC	TC	TC	TC	TC	TC
10°C DB	12.00	12.00	12.00	12.00	12.00	12.00	12.00
20°C DB	12.00	12.00	12.00	12.00	12.00	12.00	12.00
30°C DB	12.00	12.00	12.00	12.00	12.00	12.00	12.00
35°C DB	12.00	12.00	12.00	12.00	12.00	12.00	12.00
40°C DB	11.75	12.00	12.00	12.00	12.00	12.00	12.00
45°C DB	11.50	12.00	12.00	12.00	12.00	12.00	12.00

HU141MRB U30 / HU143MRB U30 + HN1600MC NK1

Outdoor	LWT 7°C	LWT 10°C	LWT 13°C	LWT 15°C	LWT 18°C	LWT 20°C	LWT 22°C
Temperature	TC	TC	TC	TC	TC	TC	TC
10°C DB	14.00	14.00	14.00	14.00	14.00	14.00	14.00
20°C DB	14.00	14.00	14.00	14.00	14.00	14.00	14.00
30°C DB	14.00	14.00	14.00	14.00	14.00	14.00	14.00
35°C DB	14.00	14.00	14.00	14.00	14.00	14.00	14.00
40°C DB	13.75	14.00	14.00	14.00	14.00	14.00	14.00
45°C DB	13.50	14.00	14.00	14.00	14.00	14.00	14.00

HU161MRB U30 / HU163MRB U30 + HN1600MC NK1

Outdoor	LWT 7°C	LWT 10°C	LWT 13°C	LWT 15°C	LWT 18°C	LWT 20°C	LWT 22°C
Temperature	TC	TC	TC	TC	TC	TC	TC
10°C DB	16.00	16.00	16.00	16.00	16.00	16.00	16.00
20°C DB	16.00	16.00	16.00	16.00	16.00	16.00	16.00
30°C DB	16.00	16.00	16.00	16.00	16.00	16.00	16.00
35°C DB	16.00	16.00	16.00	16.00	16.00	16.00	16.00
40°C DB	15.75	16.00	16.00	16.00	16.00	16.00	16.00
45°C DB	15.50	16.00	16.00	16.00	16.00	16.00	16.00

- 1. DB: Dry Bulb Temperature (°C), LWT: Leaving Water Temperature (°C), LPM: Liters Per Minute (ℓ/\min) , TC: Total Capacity (kW)
- Direct interpolation is permissible. Do not extrapolate.
 Measuring procedure follows EN-14511.
- Rated values are based on standard conditions and it can be found on specifications.
- Above table values may not be matched according to installation condition. Except for rated value, the performance is not guaranteed.
 In accordance with the test standard (or nations), the rating will vary slightly.
- 4. The shaded areas are not guaranteed continuous operation.


THERMA V... (R32) HYDROSPLIT HYDRO BOX

PRODUCT SPECIFICATION


Drawings

	Unit	Model Name					
Category		Capacity (kW)					
		12.0	14.0	16.0			
1 Phase Model	Outdoor Unit	HU121MRB U30	HU141MRB U30	HU161MRB U30			
220 ~ 240V, 1Ø, 50Hz	Indoor Unit		HN1600MC NK1				
3 Phase Model	Outdoor Unit	HU123MRB U30	HU143MRB U30	HU163MRB U30			
380 ~ 415V, 3Ø, 50Hz	Indoor Unit	HN1600MC NK1					


HU121MRB U30 / HU141MRB U30 / HU161MRB U30 HU123MRB U30 / HU143MRB U30 / HU163MRB U30 [Unit:mm]

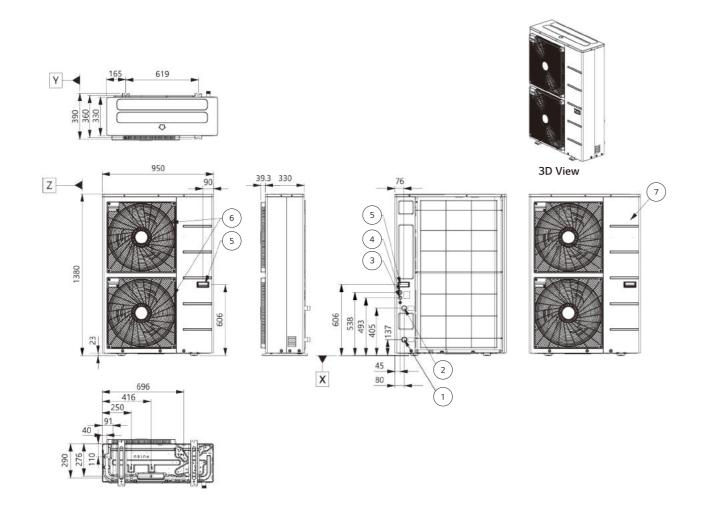

No.	Part Name	Description
1	Entering Water Pipe	Male PT 1" according to ISO 7-1 (tapered pipe threads)
2	Leaving Water Pipe	Male PT 1" according to ISO 7-1 (tapered pipe threads)
3	Unit Power	Power cable hole
4	Low Voltage	Communication cable hole
5	Handle	-
6	Air Outlet	-
7	Side Panel	-

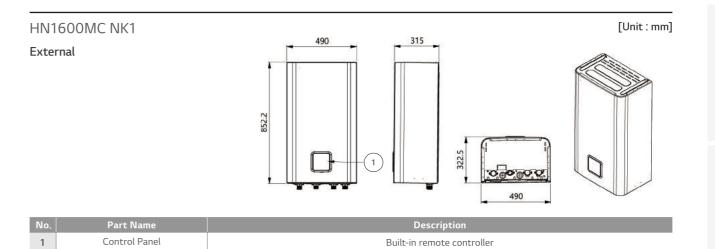


Internal

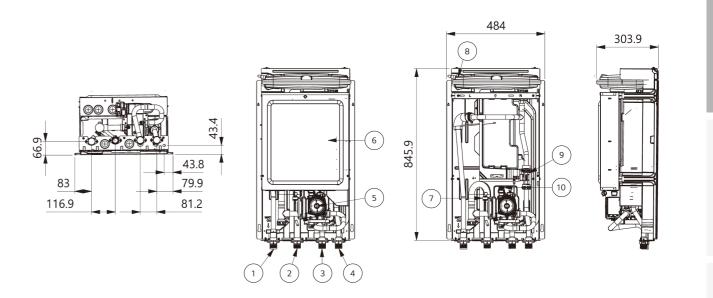


No.	Part Name	Description
1	Heating Circuit Outlet Pipe	Male PT 1" according to ISO 7-1 (tapered pipe threads)
2	Heating Circuit Inlet Pipe	Male PT 1" according to ISO 7-1 (tapered pipe threads)
3	Outlet Pipe to Outdoor Unit	Male PT 1" according to ISO 7-1 (tapered pipe threads)
4	Inlet Pipe to Outdoor Unit	Male PT 1" according to ISO 7-1 (tapered pipe threads)
5	Water Pump	GRUNDFOS UPML 20-105 CHBL
6	Control Box	PCB and Terminal blocks
7	Pressure Sensor	SENSATA 2HMP3-04W, 0-2Mpa
8	Expansion Tank	8 Liter, 3/4" connection
9	Flow Sensor	Flow range : 5 ~ 80 LPM
10	Safety Valve	Open at water pressure 3 bar

THERMA V_m (R32) R32 HYDROSPLIT IWT





Energy Label



- * 16kW 3Ø model.

Excellent Performance & Efficiency











User Convenience

















Easy Installation & Maintenance











R32 Hydrosplit IWT Introduction

The LG THERMA V Hydrosplit series separates the Indoor unit (IDU) and outdoor unit (ODU), connecting them via water pipes. The unit's heat exchanger is located within the ODU, reducing the risk of indoor refrigerant leakage. THERMA V R32 Hydrosplit IWT is a domestic hot water supply, space heating and cooling solution that conveniently combines an indoor hot water tank with a separate outdoor unit.

Key Components



- 1 DHW storage tank (200 ℓ)
- 2 Main water pump
- 3 Water pump for DHW charging
- 4 Plate heat exchanger for DHW (water / DHW)
- 5 Electric heater (Max. 6kW)
- **6** 3-way diverting valve
- **7** Expansion vessel for heating (12*l*)
- 8 Flow sensor
- Water pressure sensor
- Expansion vessel for DHW (8ℓ, option)
- 10 Buffer tank (40 ℓ , option)
- 12 RS3 Remote controller (attached on the front panel)
- A Inlet pipe from outdoor unit (female G1")
- Outlet pipe to outdoor unit (female G1") © Domestic hot water outlet pipe (female G3/4")
- Domestic cold water outlet pipe (female G3/4")
- **(E)** DHW recirculation pipe (female G3/4")
- Heating circuit inlet pipe (female G1")
- **G** Heating circuit outlet pipe (female G1")

Hydrosplit Concept

The THERMA V R32 Hydrosplit IWT connects an IDU and ODU by water pipes due to the heat exchanger's location in the outdoor unit, thus reducing the risk of indoor refrigerant leakage.




Sophisticated and Harmonious Exterior

The THERMA V R32 Hydrosplit IWT indoor unit can be installed in multiple indoor spaces, to include the utility or laundry room, garage or kitchen due to its sleek design.



Save Space and Time

Compared with conventional system, easy & quick installation is possible and smaller spaces are required for installation.



All in One

- Small footprint for product installation
- Quick & easy installation
- DHW tank (200 ℓ) & hydronic component integration
- Integrated max. 6kW back up heater
- Integrated expansion tank for heating (12 ℓ)
- Integrated buffer tank (401) & expansion tank for DHW circuit (8*l*) (Optional)

^{*} Detailed description for each function is presented on page 28 ~ 35.

R32 Hydrosplit IWT (Integrated Water Tank)

Indoor Unit

HN1616Y NB1

Outdoor Unit

HN121MRB U30 / HU123MRB U30 HN141MRB U30 / HU143MRB U30 HN161MRB U30 / HU163MRB U30























Features

- Water pipes connects IDU & ODU
- SCOP up to 4.60 (Average climate / Low temp. application): A+++ SCOP up to 3.50 (Average climate / Mid temp. application): A++ SCOPDHW 2.74 (water heating efficiency 120%, profile L): A+
- COP up to 5.04 (Outdoor air 7℃ / Leaving water 35℃)
- DHW tank (2001) & hydronic component integration
- Integrable buffer tank (40 ℓ) & expansion tank for DHW circuit (8 ℓ) (optional)
- 100% heating capacity at -7 °C OAT (@ LWT 35°C)
- Wide operation range (ambient: -25 ~ 35°C / water side: 15 ~ 65°C)
- Built-in water flow & pressure sensors to monitor real-time water circuit
- R32 refrigerant with reduced global warming potential (GWP)
- R1 compressor
- Black Fin heat exchanger
- LG ThinQ
- KEYMARK / EHPA (for Germany, Austria) / EUROVENT certification
- $\ensuremath{^{\star}}$ Only the outdoor units are registered in EHPA certification.

Model Line-up

		Model Name Capacity (kW)					
Category	Unit						
		12.0	14.0	16.0			
1 Phase Model	Outdoor Unit	HU121MRB U30	HU141MRB U30	HU161MRB U30			
220 ~ 240V, 1Ø, 50Hz	Indoor Unit	HN1616Y NB1					
3 Phase Model	Outdoor Unit	HU123MRB U30	HU143MRB U30	HU163MRB U30			
380 ~ 415V, 3Ø, 50Hz	Indoor Unit	HN1616Y NB1					

Seasonal Energy

				HU121MRB U30 (1Ø)	HU141MRB U30 (1Ø)	HU161MRB U30 (1Ø)
Description	1		Outdoor Unit	HU123MRB U30 (3Ø)	HU143MRB U30 (3Ø)	HU163MRB U30 (3Ø)
			Indoor Unit		HN1616Y NB1	
	Average	SCOP	-	4.60	4.57	4.55
Space	Climate Water	Seasonal Space Heating Efficiency (ηs)	%	181	180	179
Heating	Outlet 35°C	Seasonal Space Heating Eff. Class (A+++ to D Scale)	-	A+++	A+++	A+++
(According	Average	SCOP	-	3.50	3.47	3.45
to EN14825)	Climate Water Outlet 55°C	Seasonal Space Heating Efficiency (ηs)	%	137	136	135
		Seasonal Space Heating Eff. Class (A+++ to D Scale)	-	A++	A++	A++
		Declared Load Profile	-	L	L	L
	Average	Water Heating Efficiency (ηwн)	%	120	120	120
	Climate	SCOP _{DHW}	-	2.74	2.74	2.74
Domestic		Water Heating Eff. Class	-	A+	A+	A+
Hot Water Efficiency	147	Declared Load Profile	-	L	L	L
(According to EN16147)	Warmer Climate	Water Heating Efficiency (ηwн)	%	151	151	151
		SCOP _{DHW}	-	3.43	3.43	3.43
	6.11	Declared Load Profile	-	L	L	L
	Colder Climate	Water Heating Efficiency (ηwн)	%	101	101	101
	Cumace	SCOP _{DHW}	-	2.34	2.34	2.34

Nominal Capacity and Nominal Power Input

Description				Outdoor Unit	HU121MRB U30 (1Ø)	HU141MRB U30 (1Ø)	HU161MRB U30 (1Ø)		
		OAT (DB)	LWT (DB)	Outdoor Unit	HU123MRB U30 (3Ø)	HU143MRB U30 (3Ø)	HU163MRB U30 (3Ø)		
				Indoor Unit		HN1616Y NB1			
		7°C	35°C		12.00	14.00	16.00		
	Heating	7°C	55°C		11.00	11.50	12.00		
Nominal Capacity		2°C	35°C	kW	11.00	12.00	13.80		
	Cooling	35°C	18°C		12.00	14.00	16.00		
	Cooling	35°C	7°C		12.00	14.00	16.00		
		7°C	35°C	kW	2.38	2.86	3.33		
	Heating	7°C	55°C		3.79	4.04	4.29		
Nominal Power Input		2°C	35°C		3.01	3.31	3.83		
1 Ower Input	C1:	35°C	18°C		2.53	3.26	4.00		
	Cooling	35°C	7°C		4.44	5.38	6.40		
		7°C	35°C		5.04	4.89	4.80		
COP	Heating	7°C	55°C	W/W	2.90	2.85	2.80		
		2°C	35°C		3.65	3.63	3.60		
EED	Cooling	35°C	18°C	10//10/	4.75	4.30	4.00		
EER	Cooling	35°C	7°C	W/W	2.70	2.60	2.50		

R32 Hydrosplit IWT (Integrated Water Tank)

Product Specification (Outdoor Unit)

Technical Specification				HU121MRB U30	HU141MRB U30	HU161MRB U30	HU123MRB U30	HU143MRB U30	HU163MRB U30
Operation Range	Heating Min. ~ Max.		°C DB	-25 ~ 35					
(outdoor temp.)	Cooling	IVIIII. ~ IVIAX.	CDB			5 ~	48		
Compressor	Quantity		EA				1		
Compressor	Туре		-			Hermetic S	ealed Scroll		
	Туре		-			R:	32		
Defriesvent	GWP (global warming	g potential)	-			6	75		
Refrigerant	Precharged Amount		g			2,1	00		
	t-CO ₂ eq		-		1.418				
Piping Connections	Water Circuit	Inlet	mm (inch)	Male PT 1" according to ISO 7-1 (tapered pipe threads)					
Piping Connections	vvater Circuit	Outlet	mm (inch)	Male PT 1" according to ISO 7-1 (tapered pipe threads)					
Rated Water Flow Rate	(at LWT 35°C)		LPM	34.5	40.3	46.0	34.5	40.3	46.0
Sound Power Level	Heating	Rated	dB(A)	61	62	63	61	62	63
Sound Pressure Level (at 1m)	Heating	Rated	dB(A)	53	54	55	53	54	55
Dimensions	Unit	WxHxD	mm			950 × 1,3	80 × 330		
Weight	Unit		kg	91.7					
Exterior	Color / RAL Code		-	Warm Gray / RAL 7044					
	Voltage, Phase, Frequ	iency	V, Ø, Hz		220-240, 1, 5	0	3	380-415, 3, 50)
Power Supply	Rated	Heating	А	10.6	12.7	14.8	3.5	4.2	4.9
	Running Current	Cooling	А	11.2	14.4	17.7	3.7	4.8	5.9
	Recommended Circuit Breaker		А		40		16		
Wiring Connections	g Connections Power Supply Cable (included earth, H07RN-F)				6.0 x 3C			2.5 x 5C	

Product Specification (Indoor Unit)

Technical Specificat	ion		Unit	HN1616Y NB1
Operation Range	Heating			15 ~ 65
(Leaving Water	Cooling	Min. ~ Max.	°C DB	5 ~ 27 (16 ~ 27) ¹⁾
Temperature)	DHW			15 ~ 80 ²⁾
Domestic Hot Water	Volume		l	200
Tank	Internal Thermal Protect	t Limit	°C	85
Flow Sensor	Measuring Range	Min. ~ Max.	LPM	5 ~ 80
Flow Sensor	Water Pressure Sensor	Measuring Range	bar(G)	0 ~ 20
Expansion Vessel (Heating Circuit)	Volume	-	l	12
Cafatu Valua	Heating Circuit	Upper Limit	bar	3
Safety Valve	DHW Circuit	Upper Limit	bar	10
	Type		-	Sheath
	Number of Heating Coil		EA	1/2/3
Electric Heater	Capacity combination		kW	2.0 / 2.0 + 2.0 / 2.0 + 2.0 + 2.0
(Case 1 / Case 2 /	Heating Step		Step	1
Case 3) 3)	Power Supply		V, Ø, Hz	220-240, 1, 50 / 220-240, 1, 50 / 380-415, 3, 50
	Power Supply Cable (Inc	cluded Earth, H07RN-F)	mm² x cores	4.0 x 3C / 4.0 x 3C / 2.5 x 5C
	Rated Running Current		А	8.7 / 17.4 / 8.7
		Inlet	Inch	Female G 1" according to ISO 228-1 (parallel pipe threads)
	Water Circuit	Outlet	Inch	Female G 1" according to ISO 228-1 (parallel pipe threads)
	vvater Circuit	Inlet from Outdoor Unit	Inch	Female G 1" according to ISO 228-1 (parallel pipe threads)
Piping Connections		Outlet to Outdoor Unit	Inch	Female G 1" according to ISO 228-1 (parallel pipe threads)
	DHW Tank Water	Cold Inlet	Inch	Female G 3/4" according to ISO 228-1 (parallel pipe threads)
	Circuit	Hot Outlet	Inch	Female G 3/4" according to ISO 228-1 (parallel pipe threads)
		Recirculation	Inch	Female G 3/4" according to ISO 228-1 (parallel pipe threads)
Wiring Connections	Power and Communication Cable (included earth, H07RN-F)		mm ² x cores	0.75 x 4C
Sound Power Level	Heating Rated		dB(A)	43
Dimensions	Unit W×H×D		mm	601 × 1,812 × 685
Weight	Unit		kg	130.0
Exterior	Color / RAL Code		-	White / RAL 9002

- 1) When fan coil unit not used.
- 2) DHW 58~80°C Operating is available only when the booster heater is operating.
- 3) The capacity of electric heater can be adjusted by wiring.

Note

- 1. Due to our policy of innovation some specifications may be changed without notification.
- 2. Wiring cable size must comply with the applicable local and national codes.
- Especially the power cable and circuit breaker should be selected in accordance with that.

 3. Sound power level is measured on the rated condition in according with ISO 9614 standard.

 Sound pressure level is converted from sound power level based on tonality penalty of 0dB and installation in free-field.
- Therefore, these values can be increased owing to ambient conditions during operation. Rated sound power level is according to the EN12102-1 under conditions of the EN14825. 4. Performances are based on the following conditions (It is according to EN14511):
- Interconnected Pipe Length is standard length and difference of Elevation 5. This product contains Fluorinated greenhouse gases. (Outdoor ~ Indoor Unit) is 0m.

Accessory Parts (Optional Accessory)

Buffer Tank for Space Heating



As an optional accessory, the installer can install a standard 40 ℓ buffer tank for space heating. Fitting seamlessly into the main casing, it can be attached on the backside of the indoor unit.

Buffer tank for space	heating	Unit	OSHB-40KT.AEU		
Water Volume		l	40		
Dimensions (W x H x D)		mm	518 x 560 x 175		
Weight (w/o water)	Product	kg	24		

Expansion Vessel for DHW



As an optional accessory, the installer can install a standard 80 DHW expansion vessel that conveniently fits inside the indoor unit. It is provided with an accessory kit that includes a flexible connection tube.

Expansion vessel for DHW	Unit	OSHE-12KT.AEU
Expansion Volume	l	8
Connection	inch	3/4
Max. Pressure	bar	10
Pre-charge	bar	3
Dimensions (W x H x D)	mm	416 x 238 x 502
Weight (w/o water) Product	kg	2.5

Accessory Parts (Separately Provided)

Shut-off valve (1EA)



Shut-off valve with strainer (1EA)



Strainer



Technical Specification		Details
Material	Body	Brass
Material	Mesh	Stainless steel (STS304)
Mesh	Mesh No.	30
IVIESTI	Max. Particle Size	0.6mm
Piping Connection		Female G 1" according to ISO 228-1

Performance Table for Heating Operation

Maximum Heating Capacity (Including Defrost Effect)

HU121MRB U30 / HU123MRB U30 + HN1616Y NB1

Outdoor	LWT 30 °C	LWT 35 ℃	LWT 40 °C	LWT 45 °C	LWT 50 °C	LWT 55 °C	LWT 60 °C	LWT 65 °C
Temperature	TC	TC	TC	TC	TC	TC	TC	TC
-25°C DB	9.66	8.85	8.42	8.29	-	-	-	-
-20°C DB	10.13	10.00	9.88	9.75	9.63	-	-	-
-15°C DB	11.50	11.50	11.50	11.50	11.50	11.50	-	-
-7°C DB	12.00	12.00	12.00	12.00	12.00	12.00	12.00	-
-4°C DB	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00
-2°C DB	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00
2°C DB	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00
7°C DB	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00
10°C DB	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00
15°C DB	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00
18°C DB	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00
20°C DB	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00
35°C DB	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00

HU141MRB U30 / HU143MRB U30 + HN1616Y NB1

Outdoor	LWT 30 °C	LWT 35 ℃	LWT 40 °C	LWT 45 °C	LWT 50 °C	LWT 55 ℃	LWT 60 °C	LWT 65 °C
Temperature	TC	TC	TC	TC	TC	TC	TC	TC
-25°C DB	10.04	9.21	8.76	8.62	-	-	-	-
-20°C DB	11.82	11.25	10.95	10.67	10.59	-	-	-
-15°C DB	12.52	12.90	13.26	12.88	12.81	12.63	-	-
-7°C DB	14.00	14.00	14.00	14.00	14.00	14.00	14.00	-
-4°C DB	14.00	14.00	14.00	14.00	14.00	14.00	14.00	14.00
-2°C DB	14.00	14.00	14.00	14.00	14.00	14.00	14.00	14.00
2°C DB	14.00	14.00	14.00	14.00	14.00	14.00	14.00	14.00
7°C DB	14.00	14.00	14.00	14.00	14.00	14.00	14.00	14.00
10°C DB	14.00	14.00	14.00	14.00	14.00	14.00	14.00	14.00
15°C DB	14.00	14.00	14.00	14.00	14.00	14.00	14.00	14.00
18°C DB	14.00	14.00	14.00	14.00	14.00	14.00	14.00	14.00
20°C DB	14.00	14.00	14.00	14.00	14.00	14.00	14.00	14.00
35°C DB	14.00	14.00	14.00	14.00	14.00	14.00	14.00	14.00

HU161MRB U30 / HU163MRB U30 + HN1616Y NB1

Outdoor	LWT 30 °C	LWT 35 °C	LWT 40 °C	LWT 45 °C	LWT 50 °C	LWT 55 ℃	LWT 60 °C	LWT 65 °C
Temperature	TC	TC	TC	TC	TC	TC	TC	TC
-25°C DB	10.98	10.00	9.50	9.33	-	-	-	-
-20°C DB	13.43	12.54	12.03	11.78	11.47	-	-	-
-15°C DB	14.23	14.39	14.50	13.95	13.86	13.12	-	-
-7°C DB	16.00	16.00	16.00	16.00	16.00	16.00	16.00	-
-4°C DB	16.00	16.00	16.00	16.00	16.00	16.00	16.00	16.00
-2°C DB	16.00	16.00	16.00	16.00	16.00	16.00	16.00	16.00
2°C DB	16.00	16.00	16.00	16.00	16.00	16.00	16.00	16.00
7°C DB	16.00	16.00	16.00	16.00	16.00	16.00	16.00	16.00
10°C DB	16.00	16.00	16.00	16.00	16.00	16.00	16.00	16.00
15°C DB	16.00	16.00	16.00	16.00	16.00	16.00	16.00	16.00
18°C DB	16.00	16.00	16.00	16.00	16.00	16.00	16.00	16.00
20°C DB	16.00	16.00	16.00	16.00	16.00	16.00	16.00	16.00
35°C DB	16.00	16.00	16.00	16.00	16.00	16.00	16.00	16.00

- 1. DB : Dry Bulb Temperature (°C), LWT : Leaving Water Temperature (°C), LPM : Liters Per Minute (ℓ/\min) , TC : Total Capacity (kW)
- Direct interpolation is permissible. Do not extrapolate.
 Measuring procedure follows EN-14511.
- Rated values are based on standard conditions and it can be found on specifications.
- Above table values may not be matched according to installation condition. Except for rated value, the performance is not guaranteed.
 In accordance with the test standard (or nations), the rating will vary slightly.
- 4. The shaded areas are not guaranteed continuous operation.

Performance Table for Cooling Operation

Maximum Cooling Capacity

HU121MRB U30 / HU123MRB U30 + HN1616Y NB1

Outdoor	LWT 7°C	LWT 10°C	LWT 13°C	LWT 15°C	LWT 18°C	LWT 20°C	LWT 22°C
Temperature	TC	TC	TC	TC	TC	TC	TC
10°C DB	12.00	12.00	12.00	12.00	12.00	12.00	12.00
20°C DB	12.00	12.00	12.00	12.00	12.00	12.00	12.00
30°C DB	12.00	12.00	12.00	12.00	12.00	12.00	12.00
35°C DB	12.00	12.00	12.00	12.00	12.00	12.00	12.00
40°C DB	11.75	12.00	12.00	12.00	12.00	12.00	12.00
45°C DB	11.50	12.00	12.00	12.00	12.00	12.00	12.00

HU141MRB U30 / HU143MRB U30 + HN1616Y NB1

Outdoor Temperature	LWT 7°C TC	LWT 10°C TC	LWT 13°C TC	LWT 15°C TC	LWT 18°C TC	LWT 20°C TC	LWT 22°C TC
10°C DB	14.00	14.00	14.00	14.00	14.00	14.00	14.00
10 C DB							
20°C DB	14.00	14.00	14.00	14.00	14.00	14.00	14.00
30°C DB	14.00	14.00	14.00	14.00	14.00	14.00	14.00
35°C DB	14.00	14.00	14.00	14.00	14.00	14.00	14.00
40°C DB	13.75	14.00	14.00	14.00	14.00	14.00	14.00
45°C DB	13.50	14.00	14.00	14.00	14.00	14.00	14.00

HU161MRB U30 / HU163MRB U30 + HN1616Y NB1


Outdoor	LWT 7°C	LWT 10°C	LWT 13°C	LWT 15°C	LWT 18°C	LWT 20°C	LWT 22°C
Temperature	TC	TC	TC	TC	TC	TC	TC
10°C DB	16.00	16.00	16.00	16.00	16.00	16.00	16.00
20°C DB	16.00	16.00	16.00	16.00	16.00	16.00	16.00
30°C DB	16.00	16.00	16.00	16.00	16.00	16.00	16.00
35°C DB	16.00	16.00	16.00	16.00	16.00	16.00	16.00
40°C DB	15.75	16.00	16.00	16.00	16.00	16.00	16.00
45°C DB	15.50	16.00	16.00	16.00	16.00	16.00	16.00

- 1. DB: Dry Bulb Temperature (°C), LWT: Leaving Water Temperature (°C), LPM: Liters Per Minute (ℓ/\min) , TC: Total Capacity (kW)
- Direct interpolation is permissible. Do not extrapolate.
 Measuring procedure follows EN-14511.
- Rated values are based on standard conditions and it can be found on specifications.
- Above table values may not be matched according to installation condition. Except for rated value, the performance is not guaranteed.
 In accordance with the test standard (or nations), the rating will vary slightly.
- 4. The shaded areas are not guaranteed continuous operation.


Drawings

		Model Name					
Category	Unit	Capacity (kW)					
		12.0	14.0	16.0			
1 Phase Model	Outdoor Unit	HU121MRB U30	HU141MRB U30	HU161MRB U30			
220 ~ 240V, 1Ø, 50Hz	Indoor Unit		HN1616Y NB1				
3 Phase Model 380 ~ 415V, 3Ø, 50Hz	Outdoor Unit	HU123MRB U30 HU143MRB U30		HU163MRB U30			
	Indoor Unit		HN1616Y NB1				


HU121MRB U30 / HU141MRB U30 / HU161MRB U30 HU123MRB U30 / HU143MRB U30 / HU163MRB U30 [Unit : mm]





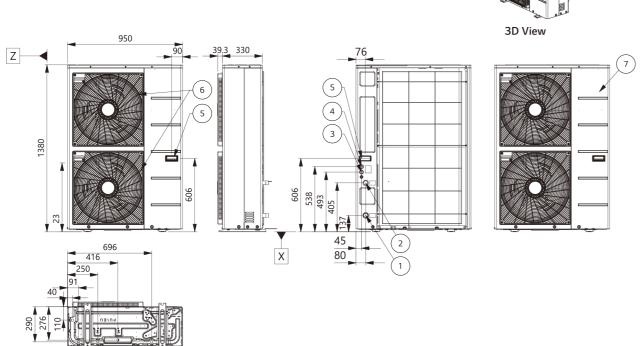

No.	Part Name	Description
1	Entering Water Pipe	Male PT 1" according to ISO 7-1 (tapered pipe threads)
2	Leaving Water Pipe	Male PT 1" according to ISO 7-1 (tapered pipe threads)
3	Unit Power	Power cable hole
4	Low Voltage	Communication cable hole
5	Handle	-
6	Air Outlet	-
7	Side Panel	-

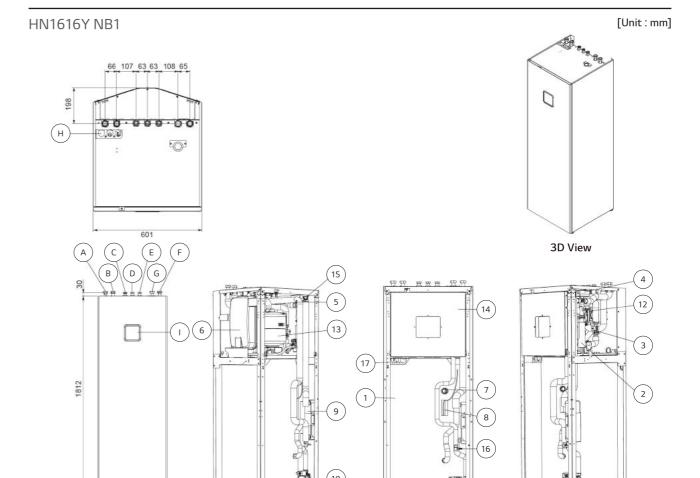


No.	Part Name	Description				
1	Domestic hot water tank	200 L				
2	Electric heater	Max 6 kW				
3	Flow Sensor	SIKA VVX20 5-80 LPM				
4	3 Way valve	Heating / DHW circuit				
5	Water pressure sensor	SENSATA 2HMP				
6	Expansion vessel	12 L for heating circuit				
7	Magnesium anode	To prevent corrosion				
8	DHW tank sensor	Temperature sensor				
9	Plate heat exchanger	Heat exchange (Water / DHW tank)				
10	DHW water pump	WILO ZRS 15/6-3				
11	Strainer For DHW tank	Filtering and stacking particles				
12	Main water pump	GRUNDFOS UPML 25-105 130 PWM A				
13	Expansion vessel	8 L For DHW circuit (Accessory)				
14	Control box	PCB and terminal blocks				
15	Air vent	Air purging when charging water				
16	Drain cock	Valve for water draining				
17	Electrical conduits	For electric wiring				


No.	Part Name	Part Name		
Α	Inlet pipe from outdoor unit	Female G1"		
В	Outlet pipe to outdoor unit	Female G1"		
С	Domestic hot water outlet pipe	Female G3/4"		
D	Domestic cold water inlet pipe	Female G3/4"		
Е	Domestic re-circulation pipe	Female G3/4"		
F	Heating circuit inlet pipe	Female G1"		
G	Heating circuit outlet pipe	Female G1"		
Н	Electrical conduits	For electric wiring		
I	Control panel	Built-in remote controller		

THERMA V... (R32) R32 SPLIT HYDRO BOX





Energy Label



- * 5kW 1Ø model.

Excellent Performance & Efficiency









User Convenience











Easy Installation & Maintenance










Piping Design configurator connection

* Detailed description for each function is presented on page 28 ~ 35.

R32 Split Hydro Box Introduction

The LG THERMA V R32 Split Hydro Box is a hydro box type comprising a separate indoor and outdoor unit, which are connected by refrigerant piping. Hydronic components such as plate heat exchanger, expansion tank and water pump are located within the indoor unit, making the unit capable of withstanding freezing outside ambient temperatures.


Key Components




- 1 RS3 (Standard III) (attached on the front panel)
- 2 Water pump (GRUNDFOS)
- 3 Water pressure sensor (SENSATA)
- 4 Flow sensor (SIKA)
- 5 Plate type heat exchanger (ref/water)
- 6 Air vent valve
- **7** Expansion vessel (8ℓ)
- 8 Back up electric heater (6kW)
- 9 Safety valve
- Strainer

1 R1 compressor


2 Black Fin heat exchanger (ref/air)



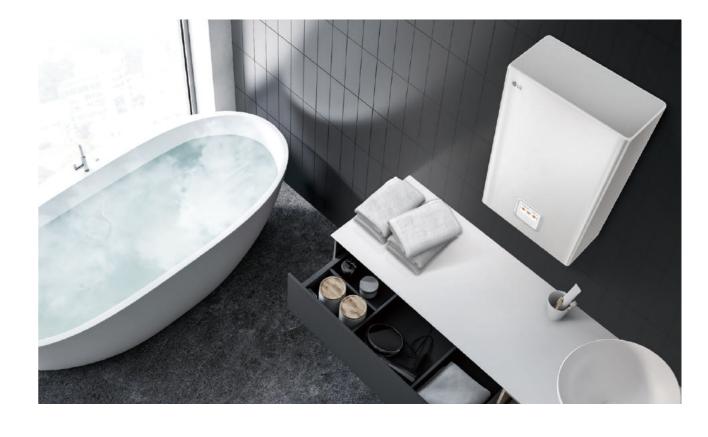

Flexible Refrigerant Piping Design

Long piping length and 3 Way piping enable flexible design and easy installation.

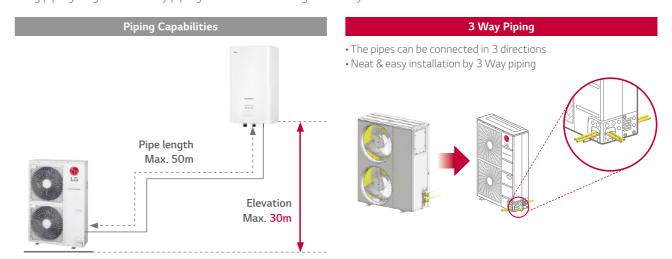

R32 Split Hydro Box

Indoor Unit HN091MR NK5 **Outdoor Unit** HU051MR U44 HU071MR U44









HU091MR U44













R1Compressor™ Black Fin 1 LG ThinQ

Features

- Refrigerant pipes connects IDU & ODU
- SCOP up to 4.65 (Average climate / Low temp. application): A+++ SCOP up to 3.23 (Average climate / Mid temp. application): A++
- COP up to 4.90 (Outdoor air 7°C / Leaving water 35°C)
- 100% heating capacity at -7 °C OAT (@ LWT 35°C)
- Wide operation range (ambient: -25 ~ 35°C / water side: 15 ~ 65°C)
- Built-in water flow & pressure sensors to monitor real-time water circuit
- R32 refrigerant with reduced global warming potential (GWP)

- R1 compressor
- · Black Fin heat exchanger
- LG ThinQ
- KEYMARK / MCS / EUROVENT certification
- * EHPA label under development

Model Line-up

		Model Name					
Category	Unit	Capacity (kW)					
		5.5	7.0	9.0			
1 Phase Model	Outdoor Unit	HU051MR U44	HU071MR U44	HU091MR U44			
220 ~ 240V, 1Ø, 50Hz	Indoor Unit	HN091MR NK5					

Seasonal Energy

Doccription	Description			HU051MR U44	HU071MR U44	HU091MR U44	
Description	Description		Indoor Unit	HN091MR NK5			
	Average	SCOP	-	4.65	4.65	4.65	
Space	Climate Water	Seasonal Space Heating Efficiency (ηs)	%	183	183	183	
Heating	Outlet 35°C	Seasonal Space Heating Eff. Class (A+++ to D scale)	-	A+++	A+++	A+++	
(according	Average	SCOP	-	3.23	3.23	3.23	
to EN14825) Climate	Climate Water	Seasonal Space Heating Efficiency (ηs)	%	126	126	126	
	Outlet 55°C	Seasonal Space Heating Eff. Class (A+++ to D scale)	-	A++	A++	A++	

Nominal Capacity and Nominal Power Input

Description		OAT (DB)	LWT (DB)	Outdoor Unit	HU051MR U44	HU071MR U44	HU091MR U44
Description		UAI (DB)	LVVI (DB)	Indoor Unit		HN091MR NK5	
		7°C	35°C		5.50	7.00	9.00
	Heating	7°C	55°C		5.50	5.50	5.50
Nominal Capacity		2°C	35°C	kW	3.30	4.20	5.40
	Cooling	35°C	18°C	,	5.50	7.00	9.00
	Cooling	35°C	7°C		5.50	7.00	9.00
		7°C	35°C	kW	1.12	1.43	1.94
Ministral	Heating	7°C	55°C		2.04	2.04	2.04
Nominal Power Input		2°C	35°C		0.94	1.20	1.54
rower input	Cooling	35°C	18°C		1.20	1.56	2.14
	Cooling	35°C	7°C		1.96	2.59	3.46
		7°C	35°C		4.90	4.90	4.65
COP	Heating	7°C	55°C	W/W	2.70	2.70	2.70
		2°C	35°C		3.52	3.51	3.50
EER	Cooling	35°C	C 18°C		4.60	4.50	4.20
LER	Cooling	35°C	7°C	W/W	2.80	2.70	2.60

Product Specification (Outdoor Unit)

Technical Specification			Unit	HU051MR U44	HU071MR U44	HU091MR U44
Operation Range	Heating	Min. ~ Max.	°C DB		-25 ~ 35	
(outdoor temp.)	Cooling	IVIIII. ~ IVIAX.	CDB		5 ~ 48	
Compressor	Quantity		EA		1	
Compressor	Туре		-	H	Iermetic Sealed Scro	ll
	Туре		-	R32		
Dofrigorant	GWP (global warming potential)		-		675	
Refrigerant	Precharged Amount		g		1,500	
	t-CO ₂ eq		-		1.013	
	Outside Diameter	Gas	mm (inch)		Ф 15.88 (5/8)	
	Outside Diameter	Liquid	mm (inch)		Φ 9.52 (3/8)	
Dining	Longth	Standard	m	5		
Piping Connections	Length	Max.	m		50	
	Level Difference	Max.	m	30		
	Chargeless-Pipe Length		m	10		
	Additional Charging Volum	e	g/m	40		
Rated Water Flow Rate (a	at LWT 35°C)		LPM	15.8	20.1	25.9
Sound Power Level	Heating	Rated	dB(A)		60	
Sound Pressure Level (at 1m)	Heating	Rated	dB(A)		52	
Dimensions	Unit	WxHxD	mm		950 × 834 × 330	
Weight	Unit		kg		60.0	
Exterior	Color / RAL Code		-	V	arm Gray / RAL 704	4
	Voltage, Phase, Frequency		V, Ø, Hz		220-240, 1, 50	
Power Supply	Rated Running Current	Heating	А	5.0	6.3	8.6
rower supply	Rated Rulling Current	Cooling	А	5.3	6.9	9.5
	Recommended Circuit Brea	aker	А	16	20	25
Wiring Connections	Power Supply Cable (includ	ed earth, H07RN-F)	mm ² x cores		4.0 x 3C	

- 1. Due to our policy of innovation some specifications may be changed without notification.
- 2. Wiring cable size must comply with the applicable local and national codes. Especially the power cable and circuit breaker should be selected in accordance with that.
- 3. Sound power level is measured on the rated condition in according with ISO 9614 standard Sound pressure level is converted from sound power level based on tonality penalty of OdB and installation in free-field. Therefore, these values can be increased owing to ambient conditions during operation.
- Rated sound power level is according to the EN12102-1 under conditions of the EN14825. 4. Performances are based on the following conditions (It is according to EN14511):
- · Interconnected Pipe Length is standard length and difference of Elevation 5. This product contains Fluorinated greenhouse gases. (Outdoor ~ Indoor Unit) is Om.

Product Specification (Indoor Unit)

Technical Specification			Unit	HN091MR NK5
0	Heating			15 ~ 65
Operation Range	Cooling	Min. ~ Max.	°C DB	5 ~ 27 (16 ~ 27) ¹⁾
(leaving water)	DHW			15 ~ 80 ²⁾
Flow Sensor	Measuring Range	Min. ~ Max.	LPM	5 ~ 80
Water Pressure Sensor	Measuring Range	Min. ~ Max.	bar(G)	0 ~ 20
Expansion Vessel	Volume		l	8
Safety Valve	Pressure Limit	Upper Limit	bar	3
	Туре		-	Sheath
	Number of Heating Coil		EA	2
Backup Heater	Capacity Combination		kW	3.0 + 3.0
	Heating Steps		Step	2
	Power Supply		V, Ø, Hz	220-240, 1, 50
	Rated Running Current		А	25.0
	Power Supply Cable (included earth	, H07RN-F)	mm² x cores	4.0 x 3C
		Inlet	Inch	Male PT 1" according to ISO 7-1
	Water Circuit	inter	IIICII	(tapered pipe threads)
Piping Connections	vvater circuit	Outlet	Inch	Male PT 1" according to ISO 7-1
riping connections				(tapered pipe threads)
	Refrigerant Circuit	Gas (outside diameter)	mm (Inch)	Ø 15.88 (5/8)
		Liquid (outside diameter)	` '	Ø 9.52 (3/8)
Wiring Connections	Power and Communication Cable (mm2 x cores	0.75 x 4C
Sound Power Level	Heating	Rated	dB(A)	44
Dimensions	Unit	$W \times H \times D$	mm	490 × 850 × 315
Weight	Unit		kg	37.6
Exterior	Color / RAL Code		-	Noble White / RAL 9016

¹⁾ When fan coil unit not used.

²⁾ DHW $58-80^{\circ}\text{C}$ Operating is available only when the booster heater is operating.

Performance Table for Heating Operation

Maximum Heating Capacity (Including Defrost Effect)

HU051MR U44 + HN091MR NK5

Outdoor	LWT 30 °C	LWT 35 °C	LWT 40 °C	LWT 45 °C	LWT 50 °C	LWT 55 ℃	LWT 60 °C	LWT 65 °C
Temperature	TC	TC	TC	TC	TC	TC	TC	TC
-25°C DB	4.02	3.90	3.78	3.66	-	-	-	-
-20°C DB	4.64	4.51	4.38	4.26	4.13	-	-	-
-15°C DB	5.26	5.12	4.99	4.85	4.72	4.58	-	-
-7°C DB	5.50	5.50	5.50	5.50	5.50	5.50	5.50	-
-4°C DB	5.50	5.50	5.50	5.50	5.50	5.50	5.50	-
-2°C DB	5.50	5.50	5.50	5.50	5.50	5.50	5.50	-
2°C DB	5.50	5.50	5.50	5.50	5.50	5.50	5.50	5.50
7°C DB	5.50	5.50	5.50	5.50	5.50	5.50	5.50	5.50
10°C DB	5.50	5.50	5.50	5.50	5.50	5.50	5.50	5.50
15°C DB	5.50	5.50	5.50	5.50	5.50	5.50	5.50	5.50
18°C DB	5.50	5.50	5.50	5.50	5.50	5.50	5.50	5.50
20°C DB	5.50	5.50	5.50	5.50	5.50	5.50	5.50	5.50
35°C DB	5.50	5.50	5.50	5.50	5.50	5.50	5.50	5.50

HU071MR U44 + HN091MR NK5

Outdoor	LWT 30 °C	LWT 35 ℃	LWT 40 °C	LWT 45 °C	LWT 50 °C	LWT 55 ℃	LWT 60 °C	LWT 65 °C
Temperature	TC	TC	TC	TC	TC	TC	TC	TC
-25°C DB	5.00	4.85	4.71	4.56	-	-	-	-
-20°C DB	5.58	5.43	5.27	5.11	4.95	-	-	-
-15°C DB	6.17	6.00	5.83	5.66	5.49	5.32	-	-
-7°C DB	7.00	7.00	7.00	7.00	7.00	7.00	7.00	-
-4°C DB	7.00	7.00	7.00	7.00	7.00	7.00	7.00	-
-2°C DB	7.00	7.00	7.00	7.00	7.00	7.00	7.00	-
2°C DB	7.00	7.00	7.00	7.00	7.00	7.00	7.00	7.00
7°C DB	7.00	7.00	7.00	7.00	7.00	7.00	7.00	7.00
10°C DB	7.00	7.00	7.00	7.00	7.00	7.00	7.00	7.00
15°C DB	7.00	7.00	7.00	7.00	7.00	7.00	7.00	7.00
18°C DB	7.00	7.00	7.00	7.00	7.00	7.00	7.00	7.00
20°C DB	7.00	7.00	7.00	7.00	7.00	7.00	7.00	7.00
35°C DB	7.00	7.00	7.00	7.00	7.00	7.00	7.00	7.00

HU091MR U44 + HN091MR NK5

Outdoor	LWT 30 °C	LWT 35 °C	LWT 40 °C	LWT 45 °C	LWT 50 °C	LWT 55 ℃	LWT 60 °C	LWT 65 °C
Temperature	TC	TC	TC	TC	TC	TC	TC	TC
-25°C DB	6.40	6.20	6.00	5.80	-	-	-	-
-20°C DB	7.23	7.00	6.77	6.54	6.31	-	-	-
-15°C DB	8.06	7.80	7.54	7.28	7.02	6.76	-	-
-7°C DB	9.00	9.00	9.00	9.00	9.00	9.00	9.00	-
-4°C DB	9.00	9.00	9.00	9.00	9.00	9.00	9.00	-
-2°C DB	9.00	9.00	9.00	9.00	9.00	9.00	9.00	-
2°C DB	9.00	9.00	9.00	9.00	9.00	9.00	9.00	9.00
7°C DB	9.00	9.00	9.00	9.00	9.00	9.00	9.00	9.00
10°C DB	9.00	9.00	9.00	9.00	9.00	9.00	9.00	9.00
15°C DB	9.00	9.00	9.00	9.00	9.00	9.00	9.00	9.00
18°C DB	9.00	9.00	9.00	9.00	9.00	9.00	9.00	9.00
20°C DB	9.00	9.00	9.00	9.00	9.00	9.00	9.00	9.00
35°C DB	9.00	9.00	9.00	9.00	9.00	9.00	9.00	9.00

- 1. DB: Dry Bulb Temperature (°C), LWT: Leaving Water Temperature (°C), LPM: Liters Per Minute (\(\ell \)/min), TC: Total Capacity (kW) 2. Direct interpolation is permissible. Do not extrapolate.

 3. Measuring procedure follows EN-14511.

- Rated values are based on standard conditions and it can be found on specifications.
 Above table values may not be matched according to installation condition. Except for rated value, the performance is not guaranteed.
 In accordance with the test standard (or nations), the rating will vary slightly.
- 4. The shaded areas are not guaranteed continuous operation.

Performance Table for Cooling Operation

Maximum Cooling Capacity

HU051MR U44 + HN091MR NK5

Outdoor	LWT 7°C	LWT 10°C	LWT 13°C	LWT 15°C	LWT 18°C	LWT 20°C	LWT 22°C
Temperature	TC	TC	TC	TC	TC	TC	TC
10°C DB	6.42	6.95	7.49	7.85	8.39	8.75	9.11
20°C DB	6.05	6.37	6.70	6.91	7.23	7.45	7.66
30°C DB	5.68	5.79	5.90	5.97	6.08	6.15	6.22
35°C DB	5.50	5.50	5.50	5.50	5.50	5.50	5.50
40°C DB	5.32	5.34	5.35	5.37	5.38	5.40	5.41
45°C DB	5.13	5.17	5.21	5.23	5.27	5.29	5.32

HU071MR U44 + HN091MR NK5

Outdoor	LWT 7°C	LWT 10°C	LWT 13°C	LWT 15°C	LWT 18°C	LWT 20°C	LWT 22°C
Temperature	TC	TC	TC	TC	TC	TC	TC
10°C DB	8.17	8.85	9.54	9.99	10.68	11.13	11.59
20°C DB	7.70	8.11	8.52	8.80	9.21	9.48	9.75
30°C DB	7.23	7.37	7.51	7.60	7.74	7.83	7.92
35°C DB	7.00	7.00	7.00	7.00	7.00	7.00	7.00
40°C DB	6.77	6.79	6.81	6.83	6.85	6.87	6.88
45°C DB	6.53	6.58	6.63	6.66	6.70	6.74	6.77

HU091MR U44 + HN091MR NK5

Outdoor	LWT 7°C	LWT 10°C	LWT 13°C	LWT 15°C	LWT 18°C	LWT 20°C	LWT 22°C
Temperature	TC	TC	TC	TC	TC	TC	TC
10°C DB	10.50	11.38	12.26	12.85	13.73	14.31	14.90
20°C DB	9.90	10.43	10.96	11.31	11.84	12.19	12.54
30°C DB	9.30	9.48	9.65	9.77	9.95	10.06	10.18
35°C DB	9.00	9.00	9.00	9.00	9.00	9.00	9.00
40°C DB	8.70	8.73	8.76	8.78	8.81	8.83	8.85
45°C DB	8.40	8.46	8.52	8.56	8.62	8.66	8.70

- 1. DB: Dry Bulb Temperature (°C), LWT: Leaving Water Temperature (°C), LPM: Liters Per Minute (ℓ/\min) , TC: Total Capacity (kW)
- Direct interpolation is permissible. Do not extrapolate.
 Measuring procedure follows EN-14511.


- Rated values are based on standard conditions and it can be found on specifications.
 Above table values may not be matched according to installation condition. Except for rated value, the performance is not guaranteed.
 In accordance with the test standard (or nations), the rating will vary slightly.
- 4. The shaded areas are not guaranteed continuous operation.


Drawings


			Model Name				
Category	Unit	Capacity (kW)					
		5.5	7.0	9.0			
1 Phase Model	Outdoor Unit	HU051MR U44	HU071MR U44	HU091MR U44			
220 ~ 240V, 1Ø, 50Hz	Indoor Unit	HN091MR NK5					

HU051MR U44 / HU071MR U44 / HU091MR U44


[Unit:mm]







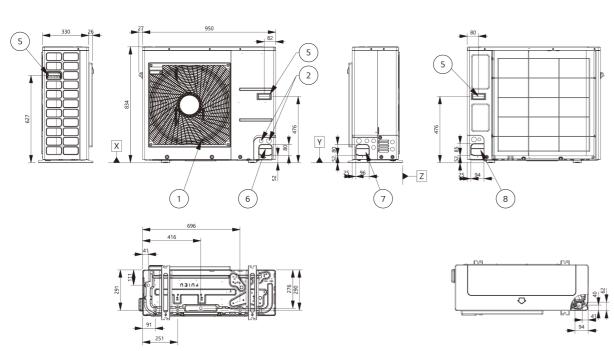

No.	Part Name	Description
1	Air Outlet	-
2	Power and Communication Cable Hole	-
3	Gas Pipe Connection	Flare joint
4	Liquid Pipe Connection	Flare joint
5	Handle	-
6	Pipe Routing Hole (front)	-
7	Pipe Routing Hole (side)	-
8	Pipe Routing Hole (back)	-



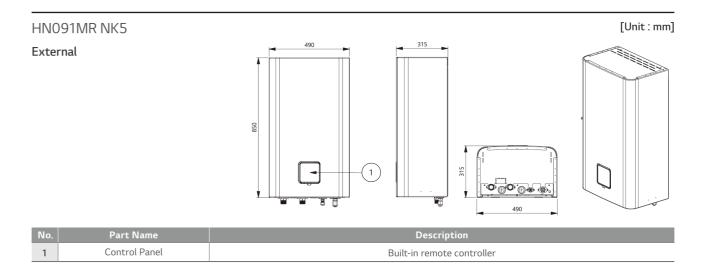


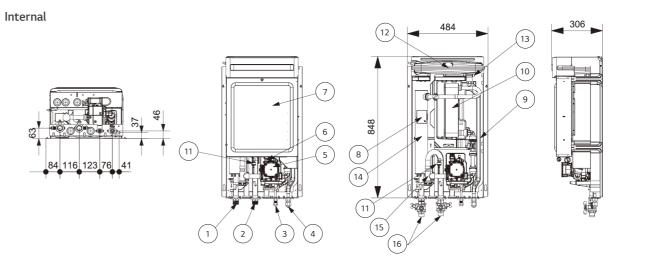


No.	Part Name	Description			
1	Leaving Water Pipe	Male PT 1" according to ISO 7-1 (tapered pipe threads)			
2	Entering Water Pipe	Male PT 1" according to ISO 7-1 (tapered pipe threads)			
3	Refrigerant Pipe (Liquid) Ø9.52 (mm)				
4	Refrigerant Pipe (Gas) Ø15.88 (mm)				
5 Water Pump GROUNDFOS UPM3K 20-75 CHBL					
6	Safety Valve	Open at water pressure 3bar			
7	Control Box	PCB and terminal blocks			
8 Thermal Switch Cut-off power input to electric heater at 90°C		Cut-off power input to electric heater at 90°C			
9	Flow Sensor	SIKA VVX20 5-80LPM			
10	Plate Heat Exchanger	Heat exchange between refrigerant and water			
11	Pressure Sensor	SENSATA 2HMP3-04W, 0-2MPa			
12	Expansion Tank	Absorbing volume change of heated water			
13	Air Vent	Air purging when charging water			
14	Backup Heater	6kW			
15	Strainer	Filtering and stacking particles inside circulating water			
16	Shut-off Valve	To drain or to block water, when pipe connecting			

THERMA V_m (R32) R32 SPLIT IWT





Energy Label



- * 9kW 1Ø model.

Excellent Performance & Efficiency









User Convenience











Easy Installation & Maintenance












* Detailed description for each function is presented on page 28 ~ 35.

R32 Split IWT Introduction

THERMA V R32 Split IWT is a domestic hot water supply, space heating and cooling solution that conveniently combines an indoor hot water tank with a separate outdoor unit. THERMA V R32 Split IWT is the perfect space-saving solution for residential applications because hydronic components like the Domestic Hot Water (DHW) and buffer tanks, which are typically installed separately, are fully integrated.

Key Components



- **1** DHW storage tank (200ℓ)
- 2 Main water pump
- 3 Water pump for DHW charging
- 4 Main plate heat exchanger (ref. / water)
- 5 Plate heat exchanger for DHW (water / DHW)
- 6 Back up electric heater (max. 6kW)
- **7** 3 Way diverting valve
- **8** Expansion vessel for heating (12ℓ)
- Expansion vessel for DHW (8ℓ, option)
- 1 Buffer tank (40ℓ, option)
- RS3 Remote controller (attached on the front panel)
- A 5/8" Refrigerant gas pipe
- **B** 3/8" Refrigerant liquid pipe
- **G** G3/4" Domestic hot water outlet
- **D** G3/4" Domestic cold water inlet
- **■** G3/4" DHW Re-circulation
- **6** G1" Heating circuit inlet **G** G1" Heating circuit outlet

Sophisticated and Harmonious Exterior

The THERMA V R32 Split IWT indoor unit can be installed in multiple indoor spaces, to include the utility or laundry room, garage or kitchen due to its sleek design.



Save Space and Time

Compared with conventional system, easy & quick installation is possible and smaller spaces are required for installation.



All in One

- Small footprint for product installation
- Quick & easy installation
- DHW tank (200ℓ) & hydronic component integration
- Integrated max. 6kW back up heater
- Integrated expansion tank for heating (12l)
- Integrated buffer tank (40ℓ) & expansion tank for DHW circuit (8*l*) (Optional)

THERMA V_m (R32) SPLIT IWT

PRODUCT SPECIFICATION

R32 Split IWT (Integrated Water Tank)

Indoor Unit

HN0916T NB1

Outdoor Unit

HU051MR U44

HU071MR U44

HU091MR U44



.



















Features

- Refrigerant pipes connects IDU & ODU
- SCOP up to 4.52 (Average climate / Low temp. application): A+++ SCOP up to 3.03 (Average climate / Mid temp. application): A+ SCOPDHW 2.89 (water heating efficiency 120%, profile L): A+
- COP up to 4.50 (Outdoor air 7°C / Leaving water 35°C)
- DHW tank (2001) & hydronic component integration
- Integrable buffer tank (40 ℓ) & expansion tank for DHW circuit (8 ℓ) (optional)
- 100% heating capacity at -7°C OAT (@ LWT 35°C)
- Wide operation range (ambient: -25 ~ 35°C / water side: 15 ~ 65°C)
- Built-in water flow to monitor real-time water circuit
- R32 refrigerant with reduced global warming potential (GWP)
- R1 compressor
- Black Fin heat exchanger
- LG ThinQ
- KEYMARK / EHPA (for Germany, Austria) / EUROVENT certification

Model Line-up

		Model Name						
Category	Unit	Capacity (kW)						
		5.0	7.0	9.0				
1 Phase Model	Outdoor Unit	HU051MR U44	HU071MR U44	HU091MR U44				
220 ~ 240V, 1Ø, 50Hz	Indoor Unit	HN0916T NB1						

Seasonal Energy

Description	,		Outdoor Unit	HU051MR U44	HU071MR U44	HU091MR U44
Description			Indoor Unit		HN0916T NB1	
	Average	SCOP	-	4.52	4.47	4.45
Canaca	Climate Water	Seasonal Space Heating Efficiency (ηs)	%	178	176	175
Space Outlet 35°C Heating	Seasonal Space Heating Eff. Class (A+++ to D scale)	-	A+++	A+++	A+++	
(according to EN14825)	Average	SCOP	-	3.01	3.00	3.03
LU EIN 14023)	Climate Water	Seasonal Space Heating Efficiency (ηs)	%	117	117	118
	Outlet 55°C	Seasonal Space Heating Eff. Class (A+++ to D scale)	-	A+	A+	A+
		Declared Load Profile	-	L	L	L
	Average	Water Heating Efficiency (η _{WH})	%	125	125	125
	Climate	SCOP _{DHW}	-	2.89	2.89	2.89
Domestic		Water Heating Efficiency Class	-	A+	A+	A+
Hot Water Efficiency		Declared Load Profile	-	L	L	L
acc.	Warmer Climate	Water Heating Efficiency (η _{WH})	%	156	156	156
EN16147		SCOP _{DHW}	-	3.61	3.61	3.61
		Declared Load Profile	-	L	L	L
	Colder Climate	Water Heating Efficiency _(ηwh)	%	106	106	106
		SCOP _{DHW}	-	2.44	2.44	2.44

Nominal Capacity and Nominal Power Input

Danaminstina		OAT (DD)	LWT (DB)	Outdoor Unit	HU051MR U44	HU071MR U44	HU091MR U44		
Description		OAT (DB)	LVVI (DD)	Indoor Unit		HN0916T NB1			
	Uestina	7°C	35°C		5.50	7.00	9.00		
Nominal Capacity	Heating	7°C	55°C	kW	5.00	5.25	5.50		
	Cooling	35°C	18°C		5.50	7.00	9.00		
_	Heating	7°C	35°C	kW	1.22	1.56	2.05		
Nominal Power Input		7°C	55°C		1.92	2.02	2.12		
1 ower input	Cooling	35°C	18°C		1.20	1.59	2.20		
COD	IIti	7°C	35°C		4.50	4.50	4.40		
COP	Heating	7°C	55°C	W/W	2.60	2.60	2.60		
EER	Cooling 35		18°C		4.60	4.40	4.10		

R32 Split IWT (Integrated Water Tank)

Product Specification (Outdoor Unit)

Technical Specification			Unit	HU051MR U44	HU071MR U44	HU091MR U44	
Operation Range	Heating	NA: NA	0C DD		-25 ~ 35		
(outdoor temp.)	Cooling	Min. ~ Max.	°C DB		5 ~ 48		
Compressor	Quantity		EA	1			
Compressor	Туре		-	Hermetic Sealed Scroll			
	Туре		-	R32			
Dofrigorant	GWP (global warming pote	ential)	-		675		
Refrigerant	Precharged Amount		g		1,500		
	t-CO ₂ eq		-		1.013		
	Outside Diameter	Gas	mm (inch)		Φ 15.88 (5/8)		
	Outside Diameter	Liquid	mm (inch)	Φ 9.52 (3/8)			
Piping	Length	Standard	m	5			
Connections	Length	Max.	m	50			
Connections	Level Difference	m		30			
	Chargeless-Pipe Length	m		10			
	Additional Charging Volum	е	g/m		40		
Rated Water Flow Rate (a	at LWT 35°C)		LPM	15.8	20.1	25.9	
Sound Power Level	Heating	Rated	dB(A)	60	6		
Sound Pressure Level (at 1m)	Heating	Rated	dB(A)	52	5	3	
Dimensions	Unit	WxHxD	mm		950 × 834 × 330		
Weight	Unit		kg		60.0		
Exterior	Color / RAL Code		-	V	arm Gray / RAL 704	4	
	Voltage, Phase, Frequency		V, Ø, Hz		220-240, 1, 50		
Power Supply	Rated Running Current	Heating	А	5.0	6.3	8.6	
Fower Supply		Cooling	А	5.3	6.9	9.5	
	Recommended Circuit Brea	aker	А	16	20	25	
Wiring Connections	Power Supply Cable (includ	ed earth, H07RN-F)	mm ² x cores		4.0 x 3C		

Note

- 1. Due to our policy of innovation some specifications may be changed without notification.
- Wiring cable size must comply with the applicable local and national codes.Especially the power cable and circuit breaker should be selected in accordance with that.
- 3. Sound power level is measured on the rated condition in according with ISO 9614 standard.

 Sound pressure level is converted from sound power level based on tonality penalty of 0dB and installation in free-field.

 Therefore, these values can be increased owing to ambient conditions during operation.

 Rated sound power level is according to the EN12102-1 under conditions of the EN14825.
- 4. Performances are based on the following conditions (It is according to EN14511):
- Interconnected Pipe Length is standard length and difference of Elevation
- 5. This product contains Fluorinated greenhouse gases. (Outdoor ~ Indoor Unit) is Om.

Product Specification (Indoor Unit)

	· · · · · · · · · · · · · · · · · · ·	<u> </u>			
Technical Specification			Unit	HN0916T NB1	
Operation Range	Heating			15 ~ 65	
(leaving water)	Cooling	Min. ~ Max.	°C DB	5 ~ 27 (16 ~ 27) ¹⁾	
<u> </u>	DHW			15 ~ 80 ²⁾	
Domestic Hot Water	Volume		l	200	
Tank	Internal Thermal Protect L		°C	85	
Flow Sensor	Measuring Range	Min. ~ Max.	LPM	5 ~ 80	
Water Pressure Sensor	Measuring Range	Min. ~ Max.	bar(G)	0 ~ 20	
Expansion Vessel (Heating Circuit)	Volume		l	12	
Safety Valve	Heating Circuit	Upper Limit	bar	3	
Safety valve	DHW Circuit	Upper Limit	bar	10	
	Туре		-	Sheath	
	Number of Heating Coil		EA	1/2/3	
Electric Heater	Capacity combination		kW	2.0 / 2.0 + 2.0 / 2.0 + 2.0 + 2.0	
(Case 1 / Case 2 /	Heating Step		Step	1	
Case 3) ³⁾	Power Supply		V, Ø, Hz	220-240, 1, 50 / 220-240, 1, 50 / 380-415, 3, 50	
	Power Supply Cable (Includ	ed Earth, H07RN-F)	mm² x cores	4.0 x 3C / 4.0 x 3C / 2.5 x 5C	
	Rated Running Current		А	8.7 / 17.4 / 8.7	
	Refrigerant Circuit	Gas (outside diameter)	mm (inch)	Ø 15.88 (5/8)	
	Kerrigeranic Circuit	Liquid (outside diameter)	mm (inch)	Ø 9.52 (3/8)	
	Water Circuit	Inlet	Inch	Female G 1" according to ISO 228-1 (parallel pipe threads)	
Piping Connections	vvacer circuit	Outlet	Inch	Female G 1" according to ISO 228-1 (parallel pipe threads)	
		Cold Inlet	Inch	Female G 3/4" according to ISO 228-1 (parallel pipe threads)	
	DHW Tank Water Circuit	Hot Outlet	Inch	Female G 3/4" according to ISO 228-1 (parallel pipe threads)	
		Recirculation	Inch	Female G 3/4" according to ISO 228-1 (parallel pipe threads)	
Wiring Connections		able(included earth, H07RN-F)			
Sound Power Level	Heating	Rated	dB(A)	43	
Dimensions	Unit	W×H×D	mm	601 × 1,812 × 685	
Weight	Unit		kg	140.0	
Exterior	Color / RAL Code		-	White / RAL 9002	

- 1) When fan coil unit not used.
- 2) DHW 58~80°C Operating is available only when the booster heater is operating.
- 3) The capacity of electric heater can be adjusted by wiring.

Accessory Parts (Optional Accessory)

Buffer Tank for Space Heating



As an optional accessory, the installer can install a standard 40ℓ buffer tank for space heating. Fitting seamlessly into the main casing, it can be attached on the backside of the indoor unit.

Buffer tank for space	heating	Unit	OSHB-40KT.AEU		
Water Volume		l	40		
Dimensions (W x H x D)		mm	518 x 560 x 175		
Weight (w/o water) Product		kg	24		

Expansion Vessel for DHW



As an optional accessory, the installer can install a standard 80 DHW expansion vessel that conveniently fits inside the indoor unit. It is provided with an accessory kit that includes a flexible connection tube.

Expansion vessel for DHW	Unit	OSHE-12KT.AEU
Expansion Volume	l	8
Connection	inch	3/4
Max. Pressure	bar	10
Pre-charge	bar	3
Dimensions (W x H x D)	mm	416 x 238 x 502
Weight (w/o water) Product	kg	2.5

Accessory Parts (Separately Provided)

Shut-off valve (1EA)



Shut-off valve with strainer (1EA)



 103

Performance Table for Heating Operation

Maximum Heating Capacity (Including Defrost Effect)

HU051MR U44 + HN0916T NB1

Outdoor	LWT 30 °C	LWT 35 ℃	LWT 40 °C	LWT 45 °C	LWT 50 °C	LWT 55 ℃	LWT 60 °C	LWT 65 °C
Temperature	TC	TC	TC	TC	TC	TC	TC	TC
-25°C DB	4.02	3.90	3.78	3.66	-	-	-	-
-20°C DB	4.64	4.51	4.38	4.26	4.13	-	-	-
-15°C DB	5.26	5.12	4.99	4.85	4.72	4.58	-	-
-7°C DB	5.50	5.50	5.50	5.50	5.50	5.50	5.50	-
-4°C DB	5.50	5.50	5.50	5.50	5.50	5.50	5.50	-
-2°C DB	5.50	5.50	5.50	5.50	5.50	5.50	5.50	-
2°C DB	5.50	5.50	5.50	5.50	5.50	5.50	5.50	5.50
7°C DB	5.50	5.50	5.50	5.50	5.50	5.50	5.50	5.50
10°C DB	5.50	5.50	5.50	5.50	5.50	5.50	5.50	5.50
15°C DB	5.50	5.50	5.50	5.50	5.50	5.50	5.50	5.50
18°C DB	5.50	5.50	5.50	5.50	5.50	5.50	5.50	5.50
20°C DB	5.50	5.50	5.50	5.50	5.50	5.50	5.50	5.50
35°C DB	5.50	5.50	5.50	5.50	5.50	5.50	5.50	5.50

HU071MR U44 + HN0916T NB1

Outdoor	LWT 30 °C	LWT 35 °C	LWT 40 °C	LWT 45 °C	LWT 50 °C	LWT 55 ℃	LWT 60 °C	LWT 65 °C
Temperature	TC	TC	TC	TC	TC	TC	TC	TC
-25°C DB	5.00	4.85	4.71	4.56	-	-	-	-
-20°C DB	5.58	5.43	5.27	5.11	4.95	-	-	-
-15°C DB	6.17	6.00	5.83	5.66	5.49	5.32	-	-
-7°C DB	7.00	7.00	7.00	7.00	7.00	7.00	7.00	-
-4°C DB	7.00	7.00	7.00	7.00	7.00	7.00	7.00	-
-2°C DB	7.00	7.00	7.00	7.00	7.00	7.00	7.00	-
2°C DB	7.00	7.00	7.00	7.00	7.00	7.00	7.00	7.00
7°C DB	7.00	7.00	7.00	7.00	7.00	7.00	7.00	7.00
10°C DB	7.00	7.00	7.00	7.00	7.00	7.00	7.00	7.00
15°C DB	7.00	7.00	7.00	7.00	7.00	7.00	7.00	7.00
18°C DB	7.00	7.00	7.00	7.00	7.00	7.00	7.00	7.00
20°C DB	7.00	7.00	7.00	7.00	7.00	7.00	7.00	7.00
35°C DB	7.00	7.00	7.00	7.00	7.00	7.00	7.00	7.00

HU091MR U44 + HN0916T NB1

Outdoor	LWT 30 °C	LWT 35 °C	LWT 40 °C	LWT 45 °C	LWT 50 °C	LWT 55 °C	LWT 60 °C	LWT 65 °C
Temperature	TC							
-25°C DB	6.40	6.20	6.00	5.80	-	-	-	-
-20°C DB	7.23	7.00	6.77	6.54	6.31	-	-	-
-15°C DB	8.06	7.80	7.54	7.28	7.02	6.76	-	-
-7°C DB	9.00	9.00	9.00	9.00	9.00	9.00	9.00	-
-4°C DB	9.00	9.00	9.00	9.00	9.00	9.00	9.00	-
-2°C DB	9.00	9.00	9.00	9.00	9.00	9.00	9.00	-
2°C DB	9.00	9.00	9.00	9.00	9.00	9.00	9.00	9.00
7°C DB	9.00	9.00	9.00	9.00	9.00	9.00	9.00	9.00
10°C DB	9.00	9.00	9.00	9.00	9.00	9.00	9.00	9.00
15°C DB	9.00	9.00	9.00	9.00	9.00	9.00	9.00	9.00
18°C DB	9.00	9.00	9.00	9.00	9.00	9.00	9.00	9.00
20°C DB	9.00	9.00	9.00	9.00	9.00	9.00	9.00	9.00
35°C DB	9.00	9.00	9.00	9.00	9.00	9.00	9.00	9.00

- 1. DB: Dry Bulb Temperature (°C), LWT: Leaving Water Temperature (°C), LPM: Liters Per Minute (\(\ell \)/min), TC: Total Capacity (kW) 2. Direct interpolation is permissible. Do not extrapolate.

 3. Measuring procedure follows EN-14511.

- Rated values are based on standard conditions and it can be found on specifications.
 Above table values may not be matched according to installation condition. Except for rated value, the performance is not guaranteed.
 In accordance with the test standard (or nations), the rating will vary slightly.
- 4. The shaded areas are not guaranteed continuous operation.

Performance Table for Cooling Operation

Maximum Cooling Capacity

HU051MR U44 + HN0916T NB1

Outdoor	LWT 7°C	LWT 10°C	LWT 13°C	LWT 15°C	LWT 18°C	LWT 20°C	LWT 22°C
Temperature	TC	TC	TC	TC	TC	TC	TC
10°C DB	6.42	6.95	7.49	7.85	8.39	8.75	9.11
20°C DB	6.05	6.37	6.70	6.91	7.23	7.45	7.66
30°C DB	5.68	5.79	5.90	5.97	6.08	6.15	6.22
35°C DB	5.50	5.50	5.50	5.50	5.50	5.50	5.50
40°C DB	5.32	5.34	5.35	5.37	5.38	5.40	5.41
45°C DB	5.13	5.17	5.21	5.23	5.27	5.29	5.32

HU071MR U44 + HN0916T NB1

Outdoor Temperature	LWT 7°C TC	LWT 10°C TC	LWT 13°C TC	LWT 15°C TC	LWT 18°C TC	LWT 20°C TC	LWT 22°C TC
10°C DB	8.17	8.85	9.54	9.99	10.68	11.13	11.59
20°C DB	7.70	8.11	8.52	8.80	9.21	9.48	9.75
30°C DB	7.23	7.37	7.51	7.60	7.74	7.83	7.92
35°C DB	7.00	7.00	7.00	7.00	7.00	7.00	7.00
40°C DB	6.77	6.79	6.81	6.83	6.85	6.87	6.88
45°C DB	6.53	6.58	6.63	6.66	6.70	6.74	6.77

HU091MR U44 + HN0916T NB1

Outdoor	LWT 7°C	LWT 10°C	LWT 13°C	LWT 15°C	LWT 18°C	LWT 20°C	LWT 22°C
Temperature	TC	TC	TC	TC	TC	TC	TC
10°C DB	10.50	11.38	12.26	12.85	13.73	14.31	14.90
20°C DB	9.90	10.43	10.96	11.31	11.84	12.19	12.54
30°C DB	9.30	9.48	9.65	9.77	9.95	10.06	10.18
35°C DB	9.00	9.00	9.00	9.00	9.00	9.00	9.00
40°C DB	8.70	8.73	8.76	8.78	8.81	8.83	8.85
45°C DB	8.40	8.46	8.52	8.56	8.62	8.66	8.70


- 1. DB: Dry Bulb Temperature (°C), LWT: Leaving Water Temperature (°C), LPM: Liters Per Minute (ℓ/\min) , TC: Total Capacity (kW)
- Direct interpolation is permissible. Do not extrapolate.
 Measuring procedure follows EN-14511.


- Rated values are based on standard conditions and it can be found on specifications.
 Above table values may not be matched according to installation condition. Except for rated value, the performance is not guaranteed.
 In accordance with the test standard (or nations), the rating will vary slightly.
- 4. The shaded areas are not guaranteed continuous operation.


Drawings


		Model Name					
Category	Unit	Capacity (kW)					
		5.5	7.0	9.0			
1 Phase Model	Outdoor Unit	HU051MR U44	HU071MR U44	HU091MR U44			
220 ~ 240V, 1Ø, 50Hz	Indoor Unit		HN0916T NB1				

HU051MR U44 / HU071MR U44 / HU091MR U44






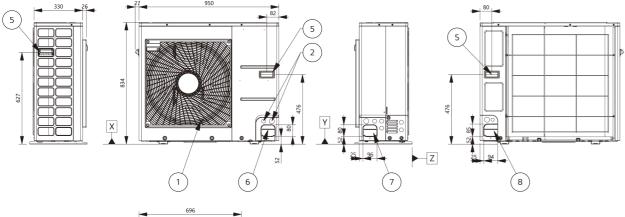






No.	Part Name	Description
1	Air Outlet	-
2	Power and Communication Cable Hole	-
3	Gas Pipe Connection	Flare joint
4	Liquid Pipe Connection	Flare joint
5	Handle	-
6	Pipe Routing Hole (front)	-
7	Pipe Routing Hole (side)	-
8	Pipe Routing Hole (back)	-



[Unit:mm]

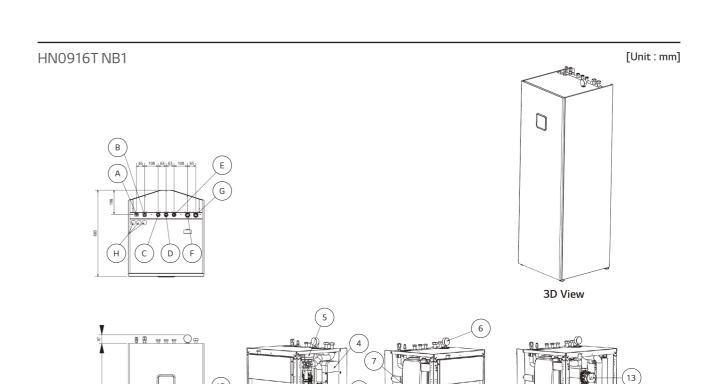


No.	Part Name	Description	
1	DHW Tank	Domestic Hot Water Tank (200L)	
2	Electric Heater	Max. 6kW	
3	Flow Sensor	SIKA VVXC9SNBUC00252P	
4	Heat Exchanger	Plate-heat-exchanger (refrigerant/water)	
5	3 Way Valve	3 Way valve (DHW/heating)	
6	Pressure Gauge	Pressure gauge	
7	Expansion Vessel (12L)	Expansion vessel for Heating	
8	Control Box	PCB and terminal blocks	
9	Magnesium Anode	To prevent corrosion	
10	Heat Exchanger	Plate-heat-exchanger (water/DHW)	
11	DHW Water Pump	WILO ZRS 15/6-3 KU	
12	DHW Strainer	Filtering and stacking particles	
13	Main Water Pump	WILO Para KU 25-130/8-75/12 iPWM1	
14	Bracket	For DHW Expansion vessel (accessory)	
15	Remote Controller	Built-in remote controller	


No.	Description
Α	G5/8" Refrigerant Gas Pipe
В	G3/8" Refrigerant liquid Pipe
С	G3/4" Domestic hot water outlet
D	G3/4" Domestic cold water inlet
Е	G3/4" DHW Re-circulation
F	G1" Heating circuit inlet
G	G1" Heating circuit outlet
Н	Cable lead throughs

THERMA V_{IM} **R410A SPLIT HYDRO BOX**





Energy Label



- * 16kW 1Ø model.

Excellent Performance & Efficiency









User Convenience











Easy Installation & Maintenance







Piping Design configurator connection

R410A Split Hydro Box Introduction

The LG THERMA V R410A Split Hydro Box is a hydro box type comprising a separate indoor and outdoor unit, which are connected by refrigerant piping. Hydronic components such as plate heat exchanger, expansion tank and water pump are located within the indoor unit, making the unit capable of withstanding freezing outside ambient temperatures.


Key Components



- 1 RS3 (Standard III) (attached on the front panel)
- 2 Water pump (GRUNDFOS)
- 3 Water pressure sensor (SENSATA)
- 4 Flow sensor (SIKA)
- 5 Plate type heat exchanger (ref/water)
- 6 Air vent valve
- **7** Expansion vessel (8ℓ)
- 8 Back up electric heater (6kW)
- 9 Safety valve
- Strainer




2 Gold Fin heat exchanger (ref/air)



Flexible Refrigerant Piping Design

Long piping length and 3 Way piping enable flexible design and easy installation.

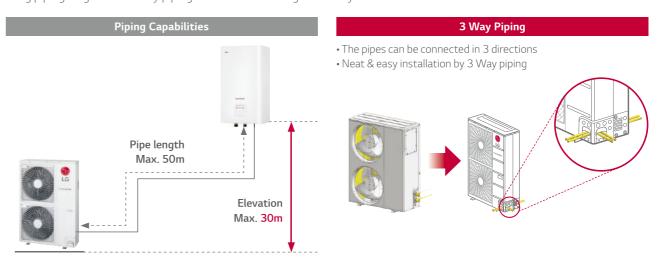

^{*} Detailed description for each function is presented on page 28 ~ 35.

THERMA V. R410A SPLIT HYDRO BOX

PRODUCT SPECIFICATION

R410A Split Hydro Box

Indoor Unit

HN1616M NK5 HN1636M NK5

Outdoor Unit

HU121MA U33 HU141MA U33

HU161MA U33 HU123MA U33

HU143MA U33

HU163MA U33

















Features

- Refrigerant pipes connects IDU & ODU
- SCOP up to 4.65 (Average climate / Low temp. application): A+++ SCOP up to 3.37 (Average climate / Mid temp. application): A++
- COP up to 4.55 (Outdoor air 7°C / Leaving water 35°C)
- 100% heating capacity at -7 °C OAT (@ LWT 35°C)
- Wide operation range (ambient : -25 \sim 35°C / water side : 15 \sim 65°C)
- Built-in water flow & pressure sensors to monitor real-time water circuit
- R1 compressor
- Gold Fin heat exchanger
- LG ThinQ
- KEYMARK / MCS / EUROVENT certification
- * EHPA label under development

Model Line-up

			Model Name				
Category	Unit	Capacity (kW)					
		12.0	14.0	16.0			
1 Phase Model	Outdoor Unit	HU121MA U33	HU141MA U33	HU161MA U33			
220 ~ 240V, 1Ø, 50Hz	Indoor Unit		HN1616M NK5				
3 Phase Model	Outdoor Unit	HU123MA U33	HU143MA U33	HU163MA U33			
380 ~ 415V, 3Ø, 50Hz	Indoor Unit		HN1636M NK5				

Seasonal Energy

			Outdoor Unit	HU121MA U33 (1Ø)	HU141MA U33 (1Ø)	HU161MA U33 (1Ø)
Dogovintion			Sucusor Sinc	HU123MA U33 (3Ø)	HU143MA U33 (3Ø)	HU163MA U33 (3Ø)
Description			Indoor Unit		HN1616M NK5 (1Ø)	
		indoor Onit	HN1636M NK5 (3Ø)			
	Average	SCOP	-	4.65	4.61	4.56
Space	Climate Water	Seasonal Space Heating Efficiency (ηs)	%	183	182	179
Heating	Outlet 35°C	Seasonal Space Heating Eff. Class (A+++ to D scale)	-	A+++	A+++	A+++
(according	Average	SCOP	-	3.36	3.37	3.32
to EN14825)	Climate Water	Seasonal Space Heating Efficiency (ηs)	%	131	132	130
	Outlet 55°C	Seasonal Space Heating Eff. Class (A+++ to D scale)	-	A++	A++	A++

Nominal Capacity and Nominal Power Input

Description				Outdoor	HU121MA U33 (1Ø)	HU141MA U33 (1Ø)	HU161MA U33 (1Ø)
		OAT (DD)	LIMIT (DD)	Unit	HU123MA U33 (3Ø)	HU143MA U33 (3Ø)	HU163MA U33 (3Ø)
		OAT (DB)	LWT (DB)	Indoor		HN1616M NK5 (1Ø)	
				Unit		HN1636M NK5 (3Ø)	
		7°C	35°C		12.00	14.00	16.00
	Heating	7°C	55°C		11.00	11.50	12.00
Nominal Capacity		2°C	35°C	kW	11.00	12.00	13.80
	Cooling	35°C	18°C		10.40	12.00	13.00
		35°C	7°C		7.94	8.50	8.92
		7°C	35°C		2.64	3.17	3.76
	Heating	7°C	55°C	kW	4.31	4.51	4.71
Nominal Power Input		2°C	35°C		3.04	3.32	3.83
1 ower input	Cooling	35°C	18°C		2.60	3.08	3.60
	Cooling	35°C	7°C		2.66	3.02	2.53
		7°C	35°C		4.55	4.41	4.26
COP	Heating	7°C	55°C	W/W	2.55	2.55	2.55
		2°C	35°C		3.62	3.61	3.60
EER	Cooling	35°C	18°C	W/W	4.00	3.90	3.61
EEK	Cooling	35°C	7°C	VV/VV	2.98	2.81	3.53

THERMA V. R410A SPLIT HYDRO BOX

PRODUCT SPECIFICATION

R410A Split Hydro Box

Product Specification (Outdoor Unit)

Technical Specification		Unit	HU121MA U33	HU141MA U33	HU161MA U33	HU123MA U33	HU143MA U33	HU163MA U33			
Operation Range	Heating	Min. ~ Max.	°C DB			-25	- 35				
(outdoor temp.)	Cooling	IVIIII. ~ IVIAX.	CDB	5 ~ 48							
Compressor	Quantity		EA		1						
Compressor	Туре		-			Hermetic S	ealed Scroll				
	Туре		-			R41	0A				
Defrigerent	GWP (global war	ming potential)	-			2,0	88				
Refrigerant	Precharged Amo	unt	g			2,5	00				
	t-CO ₂ eq		-			5.2	19				
	Outside	Gas	mm (inch)			Ф 15.8	8 (5/8)				
	Diameter	Liquid	mm (inch)		Φ 9.52 (3/8)						
Piping Connections	Length	Standard	m	7.5							
		Max.	m	50							
	Level Difference	Max.	m	30							
	Chargeless-Pipe Length		m	7.5							
	Additional Charging Volume		g/m	40							
Rated Water Flow	Rate (at LWT 35°	C)	LPM	34.5	40.3	46.0	34.5	40.3	46.0		
Sound Power Level	Heating	Rated	dB(A)	63	64	65	63	64	65		
Sound Pressure Level (at 1m)	Heating	Rated	dB(A)	55	56	57	55	56	57		
Dimensions	Unit	WxHxD	mm			950 x 1,3	80 x 330				
Weight	Unit		kg		84.8			85.4			
Exterior	Color / RAL Cod	e	-			Warm Gray	/ RAL 7044				
	Voltage, Phase, I	Frequency	V, Ø, Hz		220-240, 1, 50)		380-415, 3, 50			
D C	Rated Running	Heating	А	11.5	13.8	16.3	6.6	8.0	9.4		
Power Supply	Current	Cooling	А	11.3	13.4	15.7	6.5	7.7	9.0		
	Recommended C		А		40			20			
Wiring Connections	Power Supply Ca (included earth,		mm ² x cores	6.0 x 3C				2.5 x 5C			

- 1. Due to our policy of innovation some specifications may be changed without notification.
- 2. Wiring cable size must comply with the applicable local and national codes.
- Especially the power cable and circuit breaker should be selected in accordance with that.
- 3. Sound power level is measured on the rated condition in according with ISO 9614 standard. Sound pressure level is converted from sound power level based on tonality penalty of OdB and installation in free-field. Therefore, these values can be increased owing to ambient conditions during operation. Rated sound power level is according to the EN12102-1 under conditions of the EN14825.
- 4. Performances are based on the following conditions (It is according to EN14511): 5. This product contains Fluorinated greenhouse gases. (Outdoor ~ Indoor Unit) is Om.
- Interconnected Pipe Length is standard length and difference of Elevation

Product Specification (Indoor Unit)

Technical Specification			Unit	HN1616M NK5	HN1636M NK5
	Heating			15 -	- 57
Operation Range (leaving water)	Cooling	Min. ~ Max.	15 - 5'	5 ~ 27 (16 ~ 27) ¹⁾	
(leaving water)	DHW			80 ²⁾	
Flow Sensor	Measuring Range	Min. ~ Max.	LPM	5 ~ 80	
Water Pressure Sensor	Measuring Range	Min. ~ Max.	bar(G)	0 ~	20
Expansion Vessel	Volume		l	3	3
Safety Valve	Pressure Limit	Upper Limit	bar		3
	Туре		-	Sheath	Sheath
	Number of Heating Coil		EA	2	3
	Capacity Combination		kW	3.0 + 3.0	2.0 + 2.0 + 2.0
Backup Heater	Heating Steps		Step	2	2
	Power Supply		V, Ø, Hz	220-240, 1, 50	380-415, 3, 50
	Rated Running Current		А	25.0	8.7
	Power Supply Cable (included earth	ı, H07RN-F)	mm² x cores	4.0 x 3C	2.5 x 4C
	Water Circuit	Inlet	Inch	Male PT 1" according to ISO 7-1 (tapered pipe threads)	
Piping Connections	vvater Circuit	Outlet	Inch	Male PT 1" according to ISO 7-1 (tapered pipe threads)	
	Refrigerant Circuit	Gas (outside diameter)	mm (Inch)	Ø 15.88 (5/8)	
	Refrigerant Circuit	Liquid (outside diameter)	mm (Inch)	Ø 9.52 (3/8)	
Wiring Connections	Power and Communication Cable ((included earth, H07RN-F)	mm2 x cores	0.75	x 4C
Sound Power Level	Heating	Rated	dB(A)	4	4
Dimensions	Unit	W×H×D	mm	490 × 8	50 × 315
Weight	Unit		kg	40.0	41.0
Exterior	Color / RAL Code	-	Noble White	/ RAL 9016	

- 1) When fan coil unit not used.
- 2) DHW 58~80°C Operating is available only when the booster heater is operating.

- 1. Due to our policy of innovation some specifications may be changed without notification.
- 2. Wiring cable size must comply with the applicable local and national codes.
- Especially the power cable and circuit breaker should be selected in accordance with that.
- 3. Sound power level is measured on the rated condition in according with ISO 9614 standard. Sound pressure level is converted from sound power level based on tonality penalty of OdB and installation in free-field. Therefore, these values can be increased owing to ambient conditions during operation. Rated sound power level is according to the EN12102-1 under conditions of the EN14825.
- 4. This product contains Fluorinated greenhouse gases.

THERMA V_m R410A SPLIT HYDRO BOX

PRODUCT SPECIFICATION

Performance Table for Heating Operation

Maximum Heating Capacity (Including Defrost Effect)

HU121MA U33 + HN1616M NK5 / HU123MA U33 + HN1636M NK5

Outdoor	LWT 30 °C	LWT 35 °C	LWT 40 °C	LWT 45 °C	LWT 50 °C	LWT 55 °C
Temperature	TC	TC	TC	TC	TC	TC
-20°C DB	11.25	10.95	10.22	9.85	-	-
-15°C DB	12.00	11.32	10.90	10.32	-	-
-7°C DB	12.00	11.66	11.45	11.16	11.13	-
-4°C DB	12.00	12.00	12.00	12.00	12.00	11.24
-2°C DB	12.00	12.00	12.00	12.00	12.00	11.98
2°C DB	12.00	12.00	12.00	12.00	12.00	12.00
7°C DB	12.00	12.00	12.00	12.00	12.00	12.00
10°C DB	12.00	12.00	12.00	12.00	12.00	12.00
15°C DB	12.00	12.00	12.00	12.00	12.00	12.00
18°C DB	12.00	12.00	12.00	12.00	12.00	12.00
20°C DB	12.00	12.00	12.00	12.00	12.00	12.00
35°C DB	12.00	12.00	12.00	12.00	12.00	12.00

HU141MA U33 + HN1616M NK5 / HU143MA U33 + HN1636M NK5

Outdoor	LWT 30 °C	LWT 35 °C	LWT 40 °C	LWT 45 °C	LWT 50 °C	LWT 55 ℃
Temperature	TC	TC	TC	TC	TC	TC
-20°C DB	11.25	11.17	10.79	10.32	-	-
-15°C DB	12.11	11.98	11.54	10.90	-	-
-7°C DB	13.06	12.99	12.77	12.27	12.42	-
-4°C DB	14.00	14.00	14.00	13.64	13.09	11.67
-2°C DB	14.00	14.00	14.00	14.00	14.00	12.67
2°C DB	14.00	14.00	14.00	14.00	14.00	13.98
7°C DB	14.00	14.00	14.00	14.00	14.00	14.00
10°C DB	14.00	14.00	14.00	14.00	14.00	14.00
15°C DB	14.00	14.00	14.00	14.00	14.00	14.00
18°C DB	14.00	14.00	14.00	14.00	14.00	14.00
20°C DB	14.00	14.00	14.00	14.00	14.00	14.00
35°C DB	14.00	14.00	14.00	14.00	14.00	14.00

HU161MA U33 + HN1616M NK5 / HU163MA U33 + HN1636M NK5

Outdoor	LWT 30 °C	LWT 35 °C	LWT 40 °C	LWT 45 °C	LWT 50 °C	LWT 55 °C
Temperature	TC	TC	TC	TC	TC	TC
-20°C DB	12.27	12.01	11.48	10.86	-	-
-15°C DB	13.11	12.90	12.62	12.30	-	-
-7°C DB	13.73	13.70	13.46	13.16	12.42	-
-4°C DB	14.36	14.50	14.30	14.01	13.40	12.50
-2°C DB	15.20	14.80	14.50	14.25	14.00	13.50
2°C DB	16.00	16.00	16.00	16.00	16.00	14.51
7°C DB	16.00	16.00	16.00	16.00	16.00	16.00
10°C DB	16.00	16.00	16.00	16.00	16.00	16.00
15°C DB	16.00	16.00	16.00	16.00	16.00	16.00
18°C DB	16.00	16.00	16.00	16.00	16.00	16.00
20°C DB	16.00	16.00	16.00	16.00	16.00	16.00
35°C DB	16.00	16.00	16.00	16.00	16.00	16.00

- 1. DB : Dry Bulb Temperature (°C), LWT : Leaving Water Temperature (°C), LPM : Liters Per Minute (ℓ/\min) , TC : Total Capacity (kW)
- Direct interpolation is permissible. Do not extrapolate.
 Measuring procedure follows EN-14511.
- Rated values are based on standard conditions and it can be found on specifications.
- Above table values may not be matched according to installation condition. Except for rated value, the performance is not guaranteed.
 In accordance with the test standard (or nations), the rating will vary slightly.
- 4. The shaded areas are not guaranteed continuous operation.

Performance Table for Cooling Operation

Maximum Cooling Capacity

HU121MA U33 + HN1616M NK5 / HU123MA U33 + HN1636M NK5

Outdoor	LWT 7°C	LWT 10°C	LWT 13°C	LWT 15°C	LWT 18°C	LWT 20°C	LWT 22°C
Temperature	TC	TC	TC	TC	TC	TC	TC
20°C DB	7.60	8.55	9.51	10.33	11.19	11.98	-
30°C DB	8.62	9.05	9.78	10.67	10.90	11.37	-
35°C DB	7.94	8.66	9.33	10.10	10.40	10.75	11.16
40°C DB	7.56	8.02	8.81	9.36	9.54	9.89	10.28
45°C DB	6.38	7.08	7.79	8.44	9.14	9.44	9.78

HU141MA U33 + HN1616M NK5 / HU143MA U33 + HN1636M NK5

Outdoor	LWT 7°C	LWT 10°C	LWT 13°C	LWT 15°C	LWT 18°C	LWT 20°C	LWT 22°C
Temperature	TC	TC	TC	TC	TC	TC	TC
20°C DB	8.13	9.87	10.97	11.92	12.91	13.82	-
30°C DB	9.24	10.44	11.29	12.31	12.58	13.12	-
35°C DB	8.50	9.99	10.76	11.65	12.00	12.40	12.88
40°C DB	8.10	9.25	10.17	10.80	11.01	11.42	11.86
45°C DB	7.17	8.17	8.99	9.73	10.55	10.89	11.23

HU161MA U33 + HN1616M NK5 / HU163MA U33 + HN1636M NK5

Outdoor	LWT 7°C	LWT 10°C	LWT 13°C	LWT 15°C	LWT 18°C	LWT 20°C	LWT 22°C
Temperature	TC	TC	TC	TC	TC	TC	TC
20°C DB	8.54	10.69	11.89	12.91	13.98	14.97	-
30°C DB	9.70	11.31	12.22	13.34	13.63	14.21	-
35°C DB	8.92	10.82	11.66	12.63	13.00	13.43	13.96
40°C DB	8.51	10.03	11.02	11.70	11.93	12.37	12.85
45°C DB	7.52	8.85	9.73	10.55	11.42	11.80	12.16
15 6 5 5	7.52	0.03	3.73	10.55	11.12	11.00	12.10


- 1. DB: Dry Bulb Temperature (°C), LWT: Leaving Water Temperature (°C), LPM: Liters Per Minute (ℓ/\min) , TC: Total Capacity (kW)
- Direct interpolation is permissible. Do not extrapolate.
 Measuring procedure follows EN-14511.
- Rated values are based on standard conditions and it can be found on specifications.
- Above table values may not be matched according to installation condition. Except for rated value, the performance is not guaranteed.
 In accordance with the test standard (or nations), the rating will vary slightly.
- 4. The shaded areas are not guaranteed continuous operation.

Drawings


			Model Name					
Category	Unit	Capacity (kW)						
		12.0	14.0	16.0				
1 Phase Model 220 ~ 240V, 1Ø, 50Hz	Outdoor Unit	HU121MA U33	HU141MA U33	HU161MA U33				
	Indoor Unit		HN1616M NK5					
3 Phase Model 380 ~ 415V, 3Ø, 50Hz	Outdoor Unit	HU123MA U33 HU143MA U33		HU163MA U33				
	Indoor Unit		HN1636M NK5					


HU121MA U33 / HU141MA U33 / HU161MA U33 / HU123MA U33 / HU143MA U33 / HU163MA U33


[Unit:mm]












42
3 566 567 79

2 Air Outlet Power and Communication Cable Hole 3 Gas Pipe Connection Flare joint Liquid Pipe Connection Flare joint 5 6 7 Handle Pipe Routing Hole (front) Pipe Routing Hole (side) Pipe Routing Hole (back)

Piping Connection Port

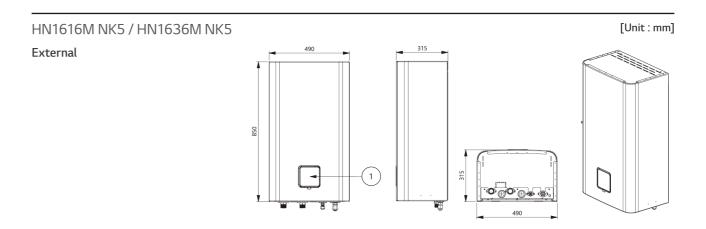


1	Control Panel	Built-in remote controller
Internal		484
	84 116 123 76	1 2 3 4 15 1 2 3 4 15


No.	Part Name	Description
1	Leaving Water Pipe	Male PT 1" according to ISO 7-1 (tapered pipe threads)
2	Entering Water pipe	Male PT 1" according to ISO 7-1 (tapered pipe threads)
3	Refrigerant Pipe (Liquid)	Ø9.52 (mm)
4	Refrigerant Pipe (Gas)	Ø15.88 (mm)
5	Water Pump	GROUNDFOS UPML 20-105 CHBL
6	Safety Valve	Open at water pressure 3bar
7	Control Box	PCB and terminal blocks
8	Thermal Switch	Cut-off power input to electric heater at 90°C
9	Flow Sensor	SIKA VVX20 5-80LPM
10	Plate Heat Exchanger	Heat exchange between refrigerant and water
11	Pressure Sensor	SENSATA 2HMP3-04W, 0-2MPa
12	Expansion Tank	Absorbing volume change of heated water
13	Air Vent	Air purging when charging water
14	Backup Heater	6 kW
15	Strainer	Filtering and stacking particles inside circulating water
16	Shut-Off Valve	To drain or to block water, when pipe connecting

THERMA V_{IM} HIGH TEMPERATURE





Energy Label



- * 16kW 1Ø model.

Excellent Performance & Efficiency







User Convenience











Easy Installation & Maintenance











Piping Design configurator connection

THERMA V High Temperature Cycle

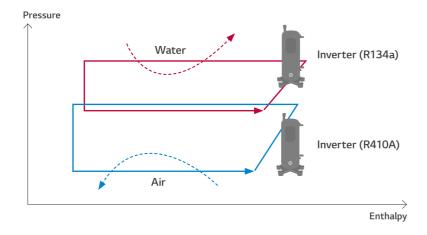


High Temperature Introduction

The LG THERMA V High Temperature is a split type unit that consists of a separate indoor and outdoor unit. With cascade 2 stage compression technology, it can supply a high leaving water temperature of up to 80°C, while maintaining high energy efficiency.

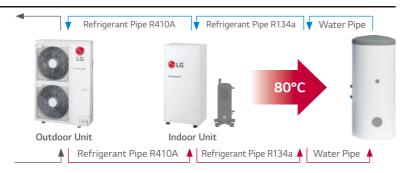

Cascade 2 Stage Compression Technology

The THERMA V High Temperature unit can produce up to 80°C hot water with high efficiency through cascade 2 stage compression (from R410A to R134a) technology, making it an optimized replacement for a boiler heating system which demands hot water supply.

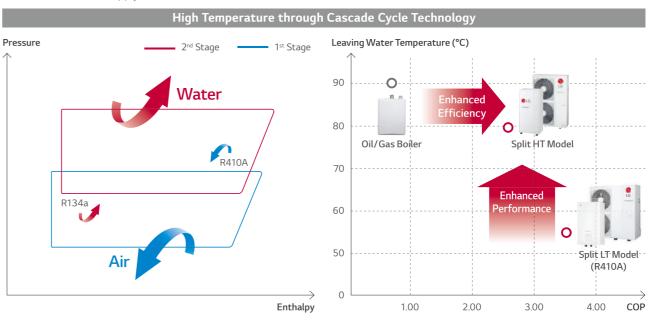

* Condition for HT model : Outdoor air temp. 18° C, Entering water temp. 70° C * Condition for LT model : Outdoor air temp. 18° C, Entering water temp. 55° C

1. OAT: Outdoor Air Temperature, EWT: Entering Water Temperature, LWT: Leaving Water Temperature

Suitable for Old Radiator

The LG THERMA V High Temperature product is suitable for houses with poor insulation, an existing radiator heating system, or are required to meet sanitary water regulation needs at high temperatures.



^{*} Detailed description for each function is presented on page 28 ~ 33.

High Temperature

Indoor Unit HN1610H NK3

Outdoor Unit

HU161HA U33























Features

- Maximum 80°C Leaving water temperature
- Cascade 2 stage compression
- Only for heating (no cooling)
- Suitable for old radiator
- SCOP up to 3.23 (Average climate / Low temp. application): A+
- SCOP up to 3.01 (Average climate / Mid temp. application): A+
- COP up to 3.27 (Outdoor air 7°C / Leaving water 35°C)
- 100% heating capacity at -7 °C OAT (@ LWT 35°C)
- Wide operation range (ambient: -25 ~ 35°C / water side: 25 ~ 80°C)

- R1 compressor (for outdoor unit)
- Black Fin heat exchanger
- LG ThinQ
- KEYMARK / MCS / EUROVENT certification

Model Line-up

		Model Name				
Category	Unit	Capacity (kW)				
		16.0				
1 Phase Model	Outdoor Unit	HU161HA U33				
220 ~ 240V, 1Ø, 50Hz	Indoor Unit	HN1610H NK3				

Seasonal Energy

Description -				HU161HA U33
Description			Indoor Unit	HN1610H NK3
	Average	SCOP	-	3.23
6 11 .:	Space Heating (according to			126
		Seasonal Space Heating Eff. Class (A+++ to D scale)	-	A+
EN14825)		SCOP	-	3.01
′ Clir	Climate Water	Climate Water Seasonal Space Heating Efficiency (ns)		117
	Outlet 55°C	Seasonal Space Heating Eff. Class (A+++ to D scale)	-	A+

Nominal Capacity and Nominal Power Input

Description		OAT (DP)	LWT (DB)	Outdoor Unit	HU161HA U33
		OAT (DB)	LVV I (DB)	Indoor Unit	HN1610H NK3
		7°C	35°C		16.00
Nominal Capacity	Heating	7°C	55°C	kW	14.00
		2°C	35°C		16.00
Ni sata d		7°C	35°C		4.89
Nominal Power Input	Heating	7°C	55°C	kW	5.00
rower input		2°C	35°C		4.92
СОР		7°C	35°C		3.27
	Heating	7°C	55°C	W/W	2.78
		2°C	35°C		3.25

Product Specification (Outdoor Unit)

Technical Specification			Unit	HU161HA U33
Operation Range (outdoor temp.)	Heating	Min. ~ Max.	°C DB	-25 ~ 35
Compressor	Quantity		EA	1
Compressor	Туре		-	Hermetic Sealed Scroll
	Туре		-	R410A
Refrigerant	GWP (global warming po	otential)	-	2,088
Kerrigerant	Precharged Amount		g	3,800
	t-CO₂ eq		-	7.933
	Outside Diameter	Gas	mm (inch)	Ф 15.88 (5/8)
	Outside Diameter	Liquid	mm (inch)	Ф 9.52 (3/8)
Piping	Length	Standard	m	7.5
Connections		Max.	m	50
Connections	Level Difference	Max.	m	30
	Chargeless-Pipe Length		m	7.5
	Additional Charging Volume		g/m	40
Rated Water Flow Rate	at LWT 35 °C		LPM	46.0
Sound Power Level	Heating	Rated	dB(A)	63
Sound Pressure Level (at 1m)	Heating	Rated	dB(A)	55
Dimensions	Unit	WxHxD	mm	950 × 1,380 × 330
Weight	Unit		kg	89.0
Exterior	Color / RAL Code		-	Warm Gray / RAL 7044
	Voltage, Phase, Frequen	су	V, Ø, Hz	220-240, 1, 50
Power Supply	Rated Running Current		А	8.4
	Recommended Circuit B	reaker	А	20
Wiring Connections	Power Cable (included e	arth)	mm ² x cores	4.0 x 3C

THERMA V FEATURES

Product Specification (Indoor Unit)

Technical Specification			Unit	HN1610H NK3
Operation Range (leaving water temp.)	Heating	Min. ~ Max.	°C DB	25 ~ 80
C	Quantity		EA	1
Compressor	Туре		-	Hermetic Sealed Twin Rotary
	Туре		-	R134a
Refrigerant	GWP (global warmi	ng potential)	-	1,430
Kerrigerant	Precharged Amount		g	1,800
	t-CO ₂ eq		-	2.574
	Water Circuit	Inlet	Inch	Male PT 1" according to ISO 7-1 (tapered pipe threads)
	water Circuit	Outlet	Inch	Male PT 1" according to ISO 7-1 (tapered pipe threads)
Piping Connections	Defii Circuit	Gas (outside diameter)	mm (Inch)	Ø15.88 (5/8)
	Refrigerant Circuit	Liquid (outside diameter)	mm (Inch)	Ø9.52 (3/8)
Rated Water Flow Rate (at LWT 35	°C)		LPM	46.0
Sound Power Level	Heating	Rated	dB(A)	58 / 63 ¹⁾
Sound Pressure Level (at 1m)	Heating	Rated	dB(A)	50
Dimensions	Unit	WxHxD	mm	520 x 1,080 x 330
Weight	Unit		kg	84.0
Exterior	Color / RAL Code		-	Morning Gray / RAL 7030
	Voltage, Phase, Frequency		V, Ø, Hz	220 ~ 240, 1, 50
Power Supply	Rated Running Current	Heating	А	9.8
	Recommended Circu	uit Breaker	Α	25
Wiring Connections	Power Cable (includ	ed earth)	mm2 x cores	4.0 x 3C (H07RN-F)
Willing Conflections	Communication Cab	e (included earth)	mm2 x cores	1.0 ~ 1.5 x 2C (VCTF-SB)
Accessory Kit of the Indoor Unit			Unit	HN1610H NK3
Remote Controller			-	Standard III (RS3)
Water Tank Temperature	Sensor Size		Ø	7
Sensor with Holder	Resistance		kΩ	5
Strainer	Mesh Size / Materia	l	-	28 mesh / Stainless Steel

1. Due to our policy of innovation some specifications may be changed without notification.

2. Wiring cable size must comply with the applicable local and national codes.

Especially the power cable and circuit breaker should be selected in accordance with that. 3. Sound power level is measured on the rated condition in according with ISO 9614 standard

Sound pressure level is converted from sound power level based on tonality penalty of OdB and installation in free-field. Therefore, these values can be increased owing to ambient conditions during operation. Rated sound power level is according to the EN12102-1 under conditions of the EN14825.

4. This product contains Fluorinated greenhouse gases.

123

THERMA V... HIGH TEMPERATURE

PRODUCT SPECIFICATION

Performance Table for Heating Operation

Maximum Heating Capacity (Including Defrost Effect)

HU161HA U33 + HN1610H NK3

Outdoor	LWT 35 °C	LWT 40 °C	LWT 45 °C	LWT 50 °C	LWT 55°C	LWT 60 °C	LWT 65 °C	LWT 70 °C	LWT 75 °C	LWT 80 °C
Temperature	TC	TC	TC	TC	TC	TC	TC	TC	TC	TC
-25°C DB	13.50	13.29	13.07	12.86	12.64	12.43	12.21	12.00	-	-
-20°C DB	14.19	14.04	13.88	13.73	13.58	13.42	13.27	13.11	12.96	-
-15°C DB	14.89	14.79	14.70	14.60	14.51	14.41	14.32	14.22	14.10	14.00
-7°C DB	16.00	16.00	16.00	16.00	16.00	16.00	16.00	16.00	16.00	16.00
-4°C DB	16.00	16.00	16.00	16.00	16.00	16.00	16.00	16.00	16.00	16.00
-2°C DB	16.00	16.00	16.00	16.00	16.00	16.00	16.00	16.00	16.00	16.00
2°C DB	16.00	16.00	16.00	16.00	16.00	16.00	16.00	16.00	16.00	16.00
7°C DB	16.00	16.00	16.00	16.00	16.00	16.00	16.00	16.00	16.00	16.00
10°C DB	16.00	16.00	16.00	16.00	16.00	16.00	16.00	16.00	16.00	16.00
15°C DB	16.00	16.00	16.00	16.00	16.00	16.00	16.00	16.00	16.00	16.00
18°C DB	16.00	16.00	16.00	16.00	16.00	16.00	16.00	16.00	16.00	16.00
20°C DB	16.00	16.00	16.00	16.00	16.00	16.00	16.00	16.00	16.00	16.00
35°C DB	16.00	16.00	16.00	16.00	16.00	16.00	16.00	16.00	16.00	16.00

- Note

 1. DB: Dry Bulb Temperature (°C), LWT: Leaving Water Temperature (°C), LPM: Liters Per Minute (l/min), TC: Total Capacity (kW)

 2. Direct interpolation is permissible. Do not extrapolate.


 3. Measuring procedure follows EN-14511.

 Rated values are based on standard conditions and it can be found on specifications.

 Above table values may not be matched according to installation condition. Except for rated value, the performance is not guaranteed.

 In accordance with the test standard (or nations), the rating will vary slightly.


 4. The shaded areas are not guaranteed continuous operation.

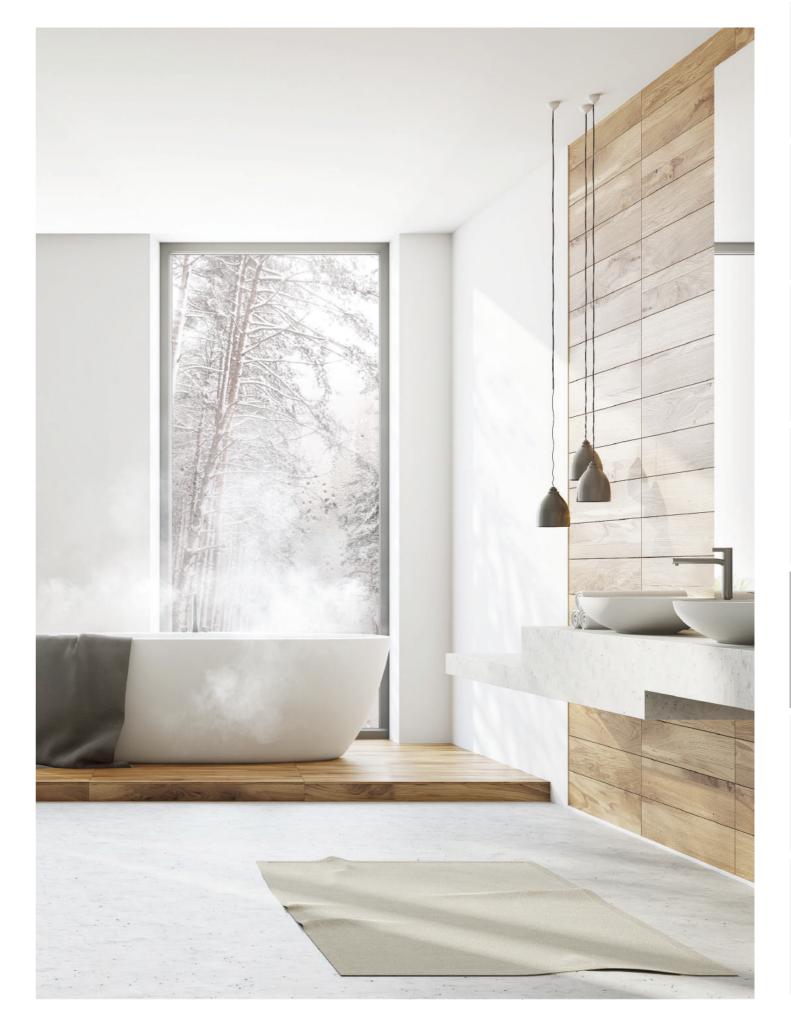


Drawings


Category	Unit	Model Name Capacity (kW) 16.0
1 Phase Model	Outdoor Unit	HU161HA U33
220 ~ 240V, 1Ø, 50Hz	Indoor Unit	HN1610H NK3


HU161HA U33 [Unit:mm]

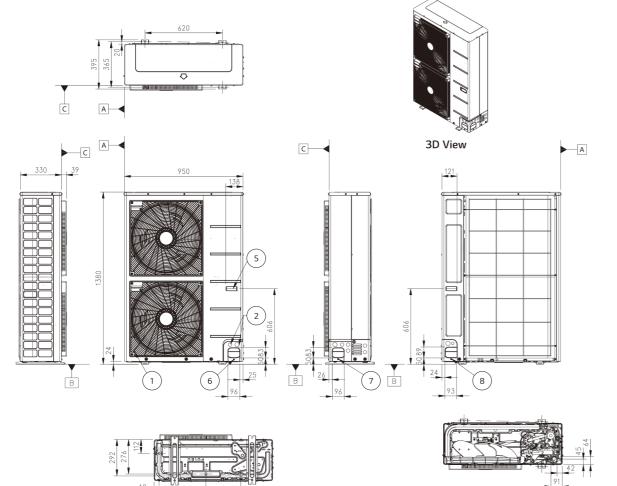

No.	Part Name	Description
1	Air Outlet	-
2	Power and Communication Cable Hole	-
3	Gas Pipe Connection	Flare joint
4	Liquid Pipe Connection	Flare joint
5	Handle	-
6	Pipe Routing Hole (front)	-
7	Pipe Routing Hole (side)	-
8	Pipe Routing Hole (back)	-






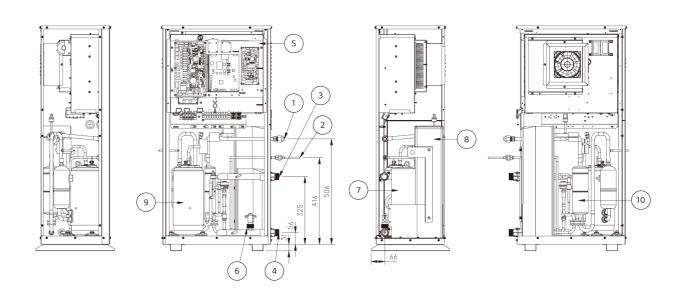


No.	Part Name	Description				
1	Refrigerant Pipe (Liquid)	Ø9.52 (mm)				
2	Refrigerant Pipe (Gas)	Ø15.88 (mm)				
3	Leaving Water Pipe	Male PT 1" according to ISO 7-1 (tapered pipe threads)				
4	Entering Water Pipe	Male PT 1" according to ISO 7-1 (tapered pipe threads)				
5	Control Box	PCB and terminal blocks				
6	Flow Switch	Minimum operation range at 15LPM				
7	Plate Heat Exchanger	Heat exchanger between refrigerant and water				
8	Plate Heat Exchanger	Heat exchanger between refrigerant and refrigerant				
9	Compressor	EPT525MBA				
10	Accumulator	716 cc				



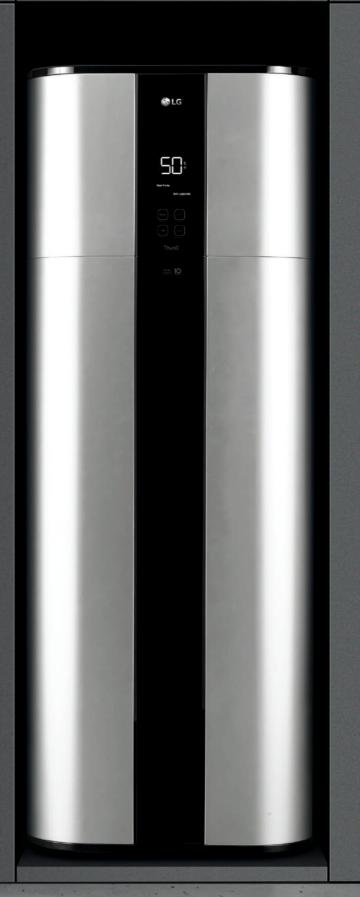

OVER 70%

Energy Saving



THERMA V... HEAT PUMP WATER HEATER

PRODUCT FEATURES

Stylish Design

LG's exclusive square design and luxury silver color make it an excellent design for the interior.




Perfect Matching with Various Spaces



Top Class Energy Efficiency


LG's new Inverter Heat Pump Water Heater allows for an impressive energy savings of over 70% compared to a conventional electric heater due to the highly efficient DUAL Inverter Compressor.

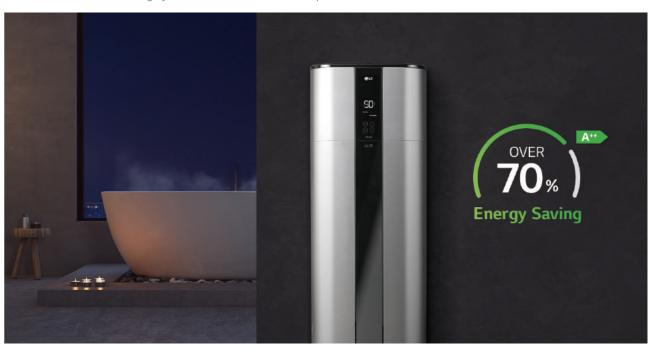

Energy Saving

LG's Heat Pump Water Heater, using market's first DUAL Inverter Compressor, DUAL Inverter Compressor can run at low rotational speed (up to 10Hz)and reduces energy consumption, 70% more than Electric Water Heater (250L, C class).

Average Estimated Energy Consumption Saving Per Year

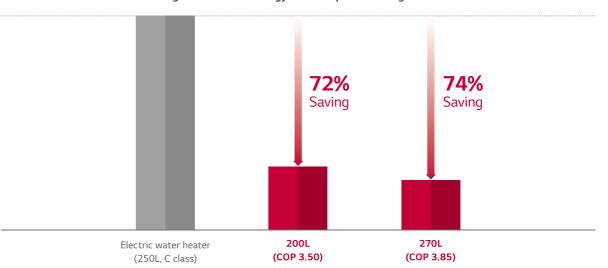


- * Simulation Data on Daily Electricity Consumption, based on EU Climate Condition (Average, 15°C).
- * Data is based on LG Internal Simulation.
- * The data is depending on the experimental condition and is changeable according to the usage environment

THERMA V. HEAT PUMP WATER HEATER

PRODUCT FEATURES

Powerful Heating Performance

The DUAL Inverter Compressor maximizes the heat pump's power in turbo mode for a 30% faster heating time for first-use water than auto mode operation.

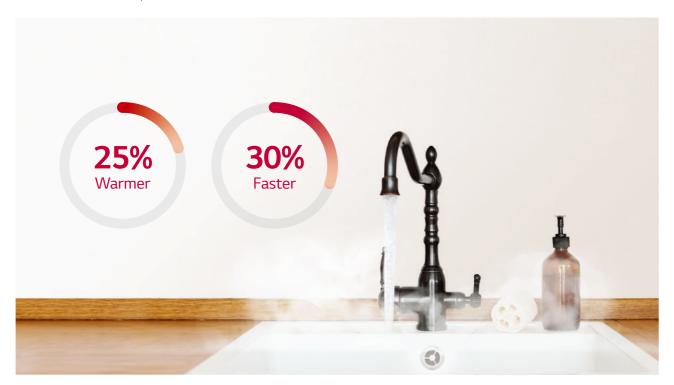

Fast & Powerful Water Heating

Turbo Mode can run at high speeds (up to 80Hz) with simultaneous heating. The target water temperature in the tank will be achieved 30% faster in Turbo Mode than in Use auto mode or Auto Mode. Furthermore, Turbo Mode can recover the water at 25% warmer temperatures than Use auto mode or Auto Mode after 1 hour from an empty tank.

- * The data is based on LG internal test and simulation.
- * The data is depending on the experimental condition and is changeable according to the usage environment

Continuous Operation

The two heat sources, two heaters and heat pump, complement each other perfectly. If one of the heaters or the heat pump fails, the other heat source allows alternative operation.









Low Noise Operation

Through BLDC Motor and DUAL Inverter Compressor, noise is reduced to 53dBA (sound power) and provides a comfortable environment even in indoor installation scenes.

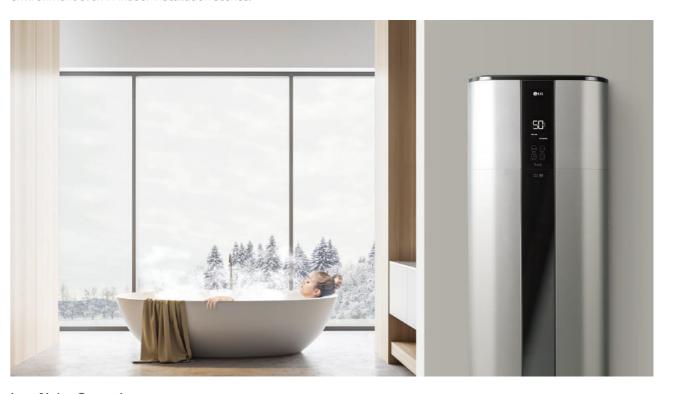

Low Noise Operation

Through BLDC Fan Motor and DUAL Inverter Compressor, noise is reduced to 53dBA and creates a comfortable environment even in indoor installation scenes.

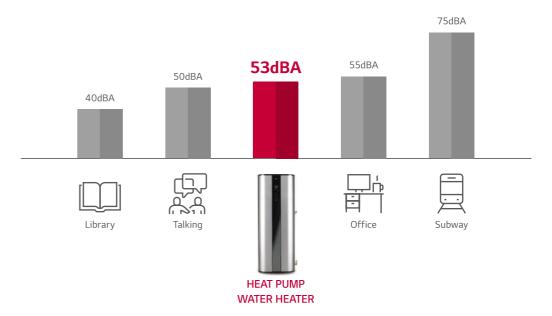

- * Sound Pressure is 38dBA based on LG internal test.
- * The data is based on LG Internal Test (Sound Power).
- * The data is based on LG internal test and simulation.
- * The data is depending on the experimental condition and is changeable according to the usage environment.

THERMA V... HEAT PUMP WATER HEATER

PRODUCT FEATURES

Various Operation Mode

LG Inverter Heat Pump Water Heater can be operated in 4 different modes for different conditions.



Operation



Using Basic ControlDisplay Screen


	r ° ° ®
Heat Pump Auto Turbo	Schedule Vacation Anti Legionella
2 Displ	ay Screen
Mode Wi-Fi (3s)	*F/*C(3s)

Button

Button	Display Screen	Description		
	Heat Pump	To select the Heat Pump mode.		
Mode	Auto	To select the Auto mode.		
Mode	Turbo	To select the Turbo mode.		
	Vacation	To select the Vacation mode.		
-	Schedule	Set Schedule mode only in LG ThinQ application.		
-	Anti Legionella	To select the Anti Legionella mode.		
Set	-	To set the desired water temperature.		
\wedge	188	To adjust the desired water temperature.		
Wi-Fi (3s)	<u> </u>	To enable the Wi-Fi pairing.		
Reset Filter (3s)	P	To reset the filter alarm.		
°F/°C (3s)	°F °C	To change unit between °F and °C.		
Water Temp (3s)		To display the current water temperature for 5 seconds.		

Smart Control

With the LG ThinQ smartphone app, users can easily control and monitor the heat pump, checking for current water temperatures, setting operating schedules and more.

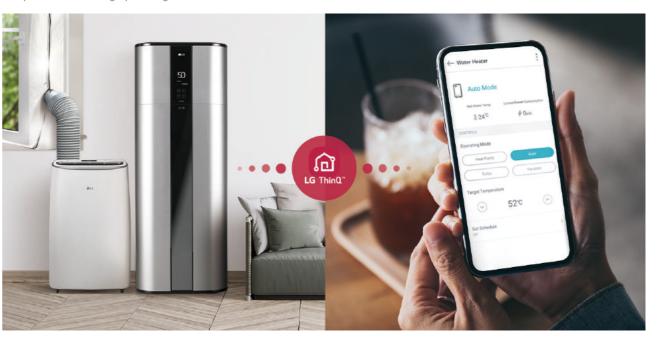

Embedded Wi-Fi

You can control the LG ThinQ app, checking information such as current water temperature, operating mode and more.




Smart Diagnosis

Smart Diagnosis allows users to conveniently check setup, installation, troubleshooting and other information directly from a smartphone.



Easy Check & Monitoring

Easily comprehensible error messages make detecting a solution and contacting the service center simple and convenient.



THERMA V. HEAT PUMP WATER HEATER

PRODUCT FEATURES

DUAL Inverter Compressor[™]

LG's DUAL Inverter Compressor™ saves energy with a wide power-saving operating range. Also, in max operation mode, it produces power heating to perform quiet and efficient heating.



Varied-Speed Dual Rotary

A compressor motor with a wider rotational frequency that is energy efficient and has a higher volumetric quick cooling capacity than conventional non-inverter compressor.

Product Reliability Improvement

As twin rotaries balance each other while they are rotating with high speed, it reduces noise dramatically compared to the shaking single rotary compressor. The reduction in vibration reduces the possibility of fractures occurring in the surrounding pipework.

- X The data is based on LG internal test and simulation.X The data is depending on the experimental condition and is changeable according to the usage environment

Benefit & Verification

Reliable Air Conditioner

Product safety is emphasized by offering a 10-year warranty on the compressor to reassure customers about



Verification

TUV Rheinland, Long Term Accelerated-reliability Test & High Marginal Test



Long Term Accelerated-Reliability test

LG's unique testing method with reinforced operating condition for a product life assurance to test and determine the product life cycle in a short period of time by accelerating the life cycle.


: High Marginal Test

Test method to secure durability in various adverse conditions that may occur in the field by performing comp reliability test against higher pressure and temperature than the designed range of pressure and temperature which the comp operates in.

* Verification obtained from TUV Rheinland for 10-year product life cycle.

Quick & Easy Installation

The machine's one-direction inlet and outlet piping and easy-to-connect wires in the junction box allow for quick and easy installation. Furthermore, the LG ThinQ app provides Service Alarm and Self Diagnosis programs for convenience maintenance.

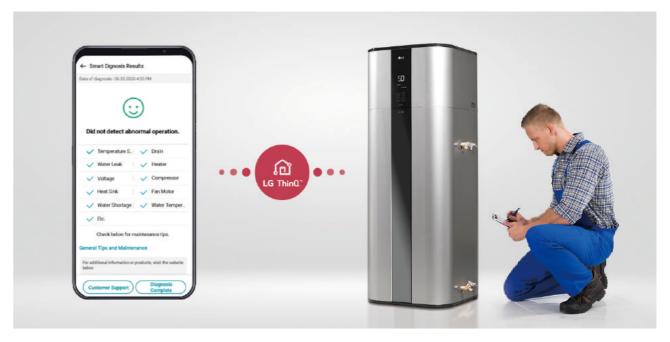

10 Year Warranty

10 year warranty for the core parts of the heat pump water heater - Water Tank, Compressor, TUV Rheinland certified 10 year durability of Dual Inverter Compressor. Ceramic coating inside water tank meets Germany Ceramic Standard DIN 4753 and it provides 10 years of corrosion resistance



* Other Parts warranty may vary according to After Sales Service condition

THERMA V. HEAT PUMP WATER HEATER

PRODUCT SPECIFICATION

Product Specification

Sales Model			WH20S		
Factory Model			R5TT20F-SA1		
Capacity	Volume (Nominal)		200L		
Energy Efficiency 1)	COP (7°C / 15°C)		3.30 / 3.50		
Energy Consumption	Annual Energy Consumption (7°C / 15°C)	kWh	756 / 709		
Load Profile			Large		
	Upper Element Wattage (230V)	kW	2		
Power Input	Lower Element Wattage (230V)	kW	2		
Energy Efficiency Class (7°C / 1	5°C)	-	A+ / A+		
Power Supply		Ø, V, Hz	1 / 230 / 50		
Available Voltage Range		V	195 ~ 265		
Operating Mode			Turbo / Auto / Heat Pump / Vacation		
	H/M	m³/min	6.7 / 4.4		
Air Flow Rate	H/M	CFM	236.6 / 155.4		
Sound Pressure Level	Auto	dB(A)+3	38		
Sound Power Level		dB(A)	55		
Dimensions	Net (W x H x D)	mm	580 x 1,625 x 582		
Weight	Net	kg	100		
Nominal insulation thickness	Min. / Max.	mm	40 / 80		
Heat Pump Operation Range			-5 / 48		
Exterior Color Code		°C DB	Luxury Silver		
Exterior color code	Туре	-	Inverter Twin Rotary		
	Warranty	Year	10		
Compressor	Manufacturer	-	LG Electronics		
	Motor Output	W	43		
	High Side	-	2.0MPa / 290 PSI		
Design Pressure (System)	Low Side	_	0.9MPa / 130.5 PSI		
Max. Working Pressure (Water		_	150 PSI (1034 kPa)		
Circuit Breaker	Turny	A	15		
Condensate water connection	I.D	mm	19, 12.7		
V40 (Mixed water at 40°C)		L	260		
V+O (IVII/ICA WALCI AL 40 C)	Туре	-	R134a		
	Pre Charge	kg	0.650		
Refrigerant	GWP	Ng .	1, 430		
	t-CO ₂ eq		0.930		
Defrost Method	t-Co2 eq	_			
		-	Reverse Cycle		
Anode T&P Relief Valve		-	ICCP		
			Yes		
Water Connection Location		-	side		
Water Connection Size		inch	G ¾ M		
Digital Display		-	Yes		
Wi-Fi (LG ThinQ) ²⁾		-	Yes		
Tank Warranty		Year	10		

- 1) Water Heater Energy Efficiency (At Auto mode)
- 2) ThinQ Main Function
- Operation mode (Auto. Heatpump, Turbo, Vacation, Schedule), Temperature setting
- Monitoring hot water Temperature Maintenance point Alarm (Filter, Anode Rod, etc.)
- * This product contains Fluorinated greenhouse gases (R134a).
- ※ GWP : Global warming potential
- ** t-CO₂eq: F-gas(kg)*GWP/1000
 ** Specification, design and feature are subject to change without prior notice.

Product Specification

	WH27S			
		R5TT27F-SA0		
Volume (Nominal)		270L		
COP (7°C / 15°C)		3.45 / 3.85		
Annual Energy Consumption (7°C / 15°C)	kWh	712 / 646		
		Large		
Upper Element Wattage (230V)	kW	2		
Lower Element Wattage (230V)	kW	2		
5°C)	-	A+ / A++ ²⁾		
	Ø, V, Hz	1 / 230 / 50		
	V	195 ~ 265		
		Turbo / Auto / Heat Pump / Vacation		
H/M	m³/min	6.7 / 4.4		
H/M	CFM	236.6 / 155.4		
Auto	dB(A)+3	38		
	dB(A)	55		
Net (W x H x D)	mm	580 x 2,008 x 582		
Net	kg	119		
		40 / 80		
leat Pump Operation Range Min. / Max.		-5 / 48		
	-	Luxury Silver		
Туре	-	Inverter Twin Rotary		
Warranty	Year	10		
Manufacturer	-	LG Electronics		
Motor Output	W	43		
High Side	-	2.0MPa / 290 PSI		
Low Side	-	0.9MPa / 130.5 PSI		
Tank)	-	150 PSI (1034 kPa)		
	А	15		
I.D	mm	19, 12.7		
	L	360		
Туре	-	R134a		
	kg	0.750		
GWP		1,430		
t-CO₂ eq		1.073		
	-	Reverse Cycle		
		ICCP		
	-	Yes		
	-	side		
	inch	G ¾ M		
	-	Yes		
	_	Yes		
		Yes 10		
	COP (7°C / 15°C) Annual Energy Consumption (7°C / 15°C) Upper Element Wattage (230V) Lower Element Wattage (230V) 5°C) H / M H / M Auto Net (W x H x D) Net Min. / Max. Min. / Max. Type Warranty Manufacturer Motor Output High Side Low Side Fank) I.D Type Pre Charge	COP (7°C / 15°C) Annual Energy Consumption (7°C / 15°C) kWh Upper Element Wattage (230V) kW S°C) - Ø, V, Hz V H / M		

- 1) Water Heater Energy Efficiency (At Auto mode) 2) Energy Label marked A+ and more than COP 3.75 in EU Standard is A++
- Operation mode (Auto. Heatpump, Turbo, Vacation, Schedule), Temperature setting
- Monitoring hot water Temperature Maintenance point Alarm (Filter, Anode Rod, etc.)
- * This product contains Fluorinated greenhouse gases (R134a).
- ※ GWP : Global warming potential
- * Specification, design and feature are subject to change without prior notice.



THERMA V_{IM}

ACCESSORIES

Accessories Provided by LG

Category	Model Name	Model Number	Figure	Applicable Product	Relevant Function	Purpose	Feature
	Room Temperature Sensor	PQRSTA0	9	All Therma V products	Room Temperature Based Control	To detect room air temperature for room temperature based control	• Max. wire length : 15m
Sensors	Thermistor for 2 nd Circuit or E/Heater	PRSTAT5K10	0	All except for High Temperature	2 nd Circuit (mixing circuit)	To detect 2 nd circuit temperature when using 2 nd circuit function	• 5kΩ thermistor, 10m
	Domestic Hot Water Sensor	PHRSTA0	0	All except for R32 Split IWT and R32 Hydrosplit IWT	Domestic Hot Water Heating	To detect DHW tank temperature	• Included in PHLTA kit
	3 Way Valve	OSHA-3V		All except for R32 Split IWT and R32 Hydrosplit IWT	Domestic Hot Water Heating	To divert water flow between space heating and DHW heating	• Size : DN 20 G 1" connection, male threaded
Valves	Thermostatic	OSHA-MV		Regardless of model	Domestic Hot Water Supply	To blend hot water with cold water for	• Size : 3/4" DN20 male threaded
	Mixing Valve	OSHA-MV1				ensuring constant, safe shower and bath outlet temp.	Size: 1" DN25 male threaded
	Domestic Hot Water Tank (single coil)	OSHW-200F	*	All except for R32 Split IWT and R32 Hydrosplit IWT			• Storage volume : 200L, 300L, 500L
		OSHW-300F			Domestic Hot Water	To generate and store domestic hot water	Type : Internal double coilMaterial : Stainless steel
DHW		OSHW-500F	(A)				Capacity of booster heater: 2.4kW
Tanks	Domestic Hot Water Tank (double coil)	OSHW-300FD		All except for R32 Split IWT, R32 Hydrosplit IWT and High Temperature	Heating		Storage volume: 300L Type: Internal double coil Material: Stainless steel Capacity of booster heater: 2.4kW
		PHLTA	(A) (A)	R32 Split Hydro Box, R410A Split Hydro Box, R32 Hydrosplit Hydro Box			Parts included : DHW tank sensor
	Domestic Hot Water	PHLTC		R410A Split Hydro Box (HN1639 NK3, 3Ø only)	Domestic Hot Water	To operate with DHW tank	(thermistor), Circuit breaker, Relay
Installation Kits	Tank Kit	PHLTB	0	R32 Monobloc, R32 Monobloc S	Heating	DOVY LAUK	Parts included: DHW tank sensor (thermistor), Circuit breaker, Relay, Multi harness
	Solar Thermal Kit	PHLLA	10	R32 Monobloc, R410A Split Hydro Box (HN1639 NK3, 3Ø only)	Solar Thermal Heat Utilization	To operate with solar thermal system	Length of thermistor: 12m Size of tube connector (W x H x D): 110 x 55 x 22

Category	Model Name	Model Number	Figure	Applicable Product	Relevant Function	Purpose	Feature
		HA031M E1	**				Heater capacity: 3kW Number of heating coil: 1EA (3.0kW) Size (W x H x D): 210 x 607 x 217 Power: 220 ~ 240V, 1Ø
		HA061M E1		R32 Monobloc, R32 Monobloc S	Capacity Back Up & Emergency Operation	To supplement insufficient capacity	Heater capacity: 6kW Number of heating coil 2EA (3.0 + 3.0kW) Size (W x H x D): 210 x 607 x 217 Power: 220 ~ 240V, 1Ø
Installation Kits	Electric Back Up Heater	HA063M E1					Heater capacity: 6kW Number of heating coil 3EA (2.0 + 2.0 + 2.0kW) Size (W x H x D): 210 x 607 x 217 Power: 380 ~ 415V, 300
		HA061C E1		R32 Hydrosplit - Hydro Box	Capacity Back Up & Emergency	To supplement insufficient	Heater capacity: 6 kW Number of heating coil 2EA (3.0 + 3.0kW) Power: 220-240 V, 10
		HA063C E1		(HN1600MC NK1)	Operation	capacity	 Heater capacity: 6 kW Number of heating coil 3EA (2.0 + 2.0 + 2.0kW) Power: 220-240 V, 3¢
	Buffer Tank for Space Heating	OSHB-40KT		R32 Split IWT and R32 Hydrosplit IWT	-	To provide the buffer volume of water to the heating circuit	• Volume : 40L • Size (W x H x D) : 518 x 560 x 175
Vessel	Expansion Vessel for DHW	OSHE-12KT		R32 Split IWT and R32 Hydrosplit IWT	-	To absorb the volume changes by temperature of water for the DHW circuit	• Volume : 8L • Connection : 3/4" • Max. pressure : 10 bar • Size (W x H x D) : 416 x 238 x 502
	Extension Wire for Wire Remote Controller	PZCWRC1	~O	All Therma V products	-	To extend wire between wired remote controller and indoor unit	• Length : 10m
	Extension Cable for Wi-Fi Modem	PWYREW000		All Therma V products	Wi-Fi Control via LG ThinQ	To extend wire between WI-Fi modem and indoor unit	• Length : 10m
	2 Remote Control Wire	PZCWRC2		All Therma V products	2 Remote Control	To connect two remote controller on the one indoor unit	• Length : 0.25m
ETC	Drain Pan	PHDPB		R32 Split Hydro Box (HN0916M NK4), R410A Split Hydro Box (HN1616 NK3 / HN1639 NK3)	Cooling	To collect condensed water in	
		PHDPC		R32 Hydrosplit , R32 Split Hydro Box (HN091MR NK5), R410A Split Hydro Box (HN1616M NK5 / HN1636M NK5)	Operation	indoor unit when cooling operation	-
	Cover Plate	PDC-HK10		R32 Hydrosplit Hydro Box, R32 Hydrosplit IWT, R32 Split Hydro Box , R32 Split IWT, R410A Split Hydro Box	-	To fill the blank space of the indoor unit front panel when the remote controller is relocated indoors.	-

143

THERMA V...

Accessories Provided by LG

ACCESSORIES

Category	Model Name	Model Number	Figure	Applicable Product	Relevant Function	Purpose	Feature
Remote Controller	Wired Remote Controller	PREMTW101		All Therma V products	2 Remote Control	To control AWHP using two remote controller (additional remote controller)	New modern design 4.3 inch color LCD display Information displayed with simple graphic, icon & text Built-in temperature sensor Size (W x H x D): 120 x 120 x 16 Extension cable (PZCWRC1, 10m) and 2 remote cable (PZCWRC2, 0.25m) are included
	AC Ez Touch	PACEZA000	B 0 0			To control AWHP using LG central controller	S inch color display User-friendly control with iconographic interface (touch screen) Max. 32 unit control Total 200 schedule events (weekly/monthly/yearly/exception day) Operation history Remote controller lock (all, temp, mode) PC access supported (IPv6 supported) DI 1EA (emergency stop only) Size (W x H x D): 137 x 121 x 25
Central Controller	AC Smart 5	PACS4B000 (Smart 4) PACS5A000 (Smart 5)		All Therma V products	Centralized Control		• 10.2 inch color display • User-friendly control with iconographic interface (touch screen) • (Smart 4)_Max. IDU 32, (Smart 5)_Max. IDU 64 • Total 100 schedule events (weekly/monthly/yearly/exception day) • History/operation trend • Interlock with 3 rd party equipment (ACS IO, ACU IO module is needed) • Error alarm by e-mail • Remote controller lock (all, temp, mode) • Map view (visual navigation) • Web access supported with HTML5 (PC, smartphone, tablet) • DI 2EA, DO 2EA • BACnet IP/modbus TCP protocol support • Size (W x H x D): 253.2 x 167.7 x 28.9
	ACP 5	PACP4B000 (ACP4) PACP5A000 (ACP5)	* 1 SQ				Web access controller Max. 128 unit control Total 100 schedule events (weekly/monthly/yearly/exception day) History/operation trend Interlock with 3 rd party equipment (ACS IO, ACU IO module is needed) Error alarm by e-mail Remote controller lock (all, temp, mode) Map view (visual navigation) DI 10EA, DO 4EA BACnet IP/modbus TCP protocol support Size (W x H x D): 270 x 155 x 65

Cata			-				
Category	Model Name	Model Number	Figure	Applicable Product	Relevant Function	Purpose	Feature
Gateway	ACP Lonworks	PLNWKB000				To link with AWHP and other existing building control system	Web access controller Max. 64 unit control ACP function included Lonworks protocol support Size (W x H x D): 270 x 155 x 65
	Modbus RTU Gateway	PMBUSB00A	To D. A.			To communicate and control through the central controller (providing modbus RTU connection between AWHP and BMS)	Modbus RTU slave (RS485) / 9,600 bps Size (W x H x D): 53.6 x 89.7 x 60.7 Max. 16 IDUs with single module / Max. 64 IDUs with 4 modules Power: DC 12V
	PI485 Gateway	PMNFP14A1				To communicate and control through the central controller (converting LG protocol to RS485 protocol)	• 1 for each outdoor unit • Power : Supplied by outdoor unit
Dry Contact	Simple Dry Contact	PDRYCB000	-		-	To connect between the AWHP and external devices to control various functions	• 1 Set per 1 unit • 1 Input contact for turning on/off • Input power : 220 – 240V • 2 output contacts • Operation status - Error status
	Dry Contact for Thermostat	PDRYCB320	-	All Therma V products			1 Set per 1 unit Non voltage or 12 ~ 24V 8 digital input contacts for thermostat - On/off, operation mode, DHW heating - Emergency mode, silent mode 2 Output contacts - Operation status - Error status
ETC	LG Wi-Fi Modem	PWFMDD200	- 16 - 16	All Therma V	Wi-Fi Control via LG ThinQ	To control AWHP via smartphone	Basic control function On/off, operation mode, set temp DHW heating and set temp Weekly on/off schedule Error status check Frequency: 2.4GHz IEEE 802.11b/g/n supported
	Meter Interface	PENKTH000	•10 10	products	Energy Monitoring	To measure production / consumption power	Energy meter interface to monitor Electricity and Heat energy Max. 3 watt

Note 1. PI485 Gateway (PMNFP14A1) should be installed on outdoor unit to use central controller.

THERMA V_{IM}

ACCESSORIES

LG Wi-Fi Modem

PWFMDD200 ENCXLEU

Access LG THERMA V anytime and from anywhere with Wi-Fi equipped device. LG's exclusive Home Appliances control app (LG ThinQ) is available.

Simple operation for various functions.

- On/off
- Operation mode selection
- Current temperature
- Set temperature
- On/off reservation scheduling
- Energy monitoring
- ESS monitoring
- Silent mode reservation
- Holiday mode
- Quick DHW heating



Model Name	PWFMDD200			
Size (mm)	46 x 68 x 14			
Interfaceable Products	All THERMA V Line-ups except for R410A IWT			
Connection Type	Indoor Unit 1 : 1			
Communication Frequency	2.4GHz			
Wireless Standards	IEEE 802.11b/g/n			
Mobile Application	LG ThinQ (Android v4.1 (Jellybean) or higher, iPhone iOS 9.0 or higher)			
Optional Extension Cable	PWYREW000 (10m extension)			

Note

- 1. Functionality may be different according to each Indoor model.
- User interface of application shall be revised for its design and contents improvement.
- 3. Application is optimized for smartphone use, so it may not be well functioning with tablet devices.

 For the compatibility with indoor unit, please contact regional office.

Domestic Hot Water Tank

OSHW-200F AEU OSHW-300F AEU OSHW-300FD AEU



Doub	le I	Coil	

Single Coil

Technical Specificat	ion	Unit	OSHW-200F	OSHW-300F	OSHW-500F	OSHW-300FD
	Water Volume	l	200	300	500	300
	Diameter	mm	640	640	640	640
General Characteristics	Height	mm	1,350	1,850	1,900	1,850
	Empty Weight	Kg	61	100	146	106
Tank Materials Color		-	STS: F18	STS:F18	STS:F18	STS:F18
	Water Volume Diameter Diameter Meight Meight Mometer M	Grey	Grey	Grey	Grey	
C	Additional Electric Heater	W	1,350	2,400	2,400	
Specification of Electric Back up	Power Supply	V, Ø, Hz	230, 1, 50 (60)	230, 1, 50 (60)	230, 1, 50 (60)	230, 1, 50 (60)
Liceti ie buek up	Diameter	0 ~ 90	0 ~ 90	0 ~ 90		
	Exchanger Type	- Single Single Single er - STS: F18 STS: F18 STS: F18	Single	Double		
Specification of	Material Exchanger	-	STS:F18	STS:F18	STS:F18	STS:F18
Heat Exchanger	Maximum Water Temp.	°C	90	90	90	90
	Coil Surface	m ²	2.3	3.1	4.8	3.1 + 0.97
	Heat Pump Inlet	inch	1 BSP female	1 BSP female	1 ¼ BSP female	¾ BSP female (upper coil)
	Heat Pump Outlet	inch	1 BSP female	1 BSP female	1 ¼ BSP female	¾ BSP female (upper coil)
Water Connections	Solar Inlet	inch	-	-	-	1 BSP Female (lower coil)
	Solar Outlet	inch	-	-	-	1 BSP Female (lower coil)
	City Water Inlet	inch	¾ BSP male	¾ BSP male	1 BSP male	¾ BSP male
	Hot Water Outlet	inch	¾ BSP female	1 BSP female	1 BSP female	1 BSP female
Energy Efficiency Clas	s (A+ to F scale)	-	В	В	В	В
Standing Heat Loss		W	61	70	83	70

Mandatory Optional Accessories				
Domestic Hot Water Tank Installation Kit	PHLTA (1Ø, split), PHLTB (monobloc), PHLTC (3Ø, split)			
Optional Accessories				
Thermostatic Mixing Valve (3/4" DN20)	OSHA-MV			
Thermostatic Mixing Valve (1" DN25)	OSHA-MV1			
3 Way Valve	OSHA-3V			

THERMA V.

ACCESSORIES

Combined Test with DHW Tank

LG has conducted a combination test of THERMA V with DHW tanks in accordance with EN16147 and obtained an ErP label for packages in order to cope with European nZEB regulations.

- R32 Monobloc (5, 7, 9kW) + OSHW-200F
- R32 Monobloc (12, 14, 16kW) + OSHW-200F
- R32 Monobloc (5, 7, 9kW) + OSHW-300F



	THERMA V	R32 Monobloc (5,7,9kW)	R32 Monobloc (12, 14, 16kW)	R32 Monobloc (5,7,9kW)	
Model	Model Name	HM051M U43 HM071M U43 HM091M U43	HM121M U33 HM141M U33 HM161M U33	HM051M U43 HM071M U43 HM091M U43	
	Tank	OSHW-200F AEU	OSHW-200F AEU	OSHW-300F AEU	
Declared Lo	ad Profile	L	L	XL	
	Grade	A+	А	A+	
Average	Efficiency	122%	109%	134%	
Climate	Annual Energy Consumption	839kWh	940kWh	1,254kWh	
Energy Label		ENERG © © © © © © © © © © © © © © © © © © ©	ENERG © © DE CONTROL OF THE PROPERTY OF THE PR	ENERG OF THE STATE	

