

terneo RK



RK

55 125

55 125





/		
1		-55 ⁰ +125 ⁰
2		16
3		3,0
4		220 ± 10%
5		0,27 - 10%
6		80 · 90 · 54
7		DS18B20
8		4
9	- - ..	50 000
10	- - ..	100 000
11	- - ..	1 ⁰ 30 ⁰
12	14254	IP20



RK

1

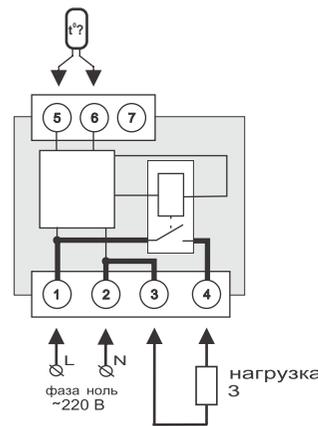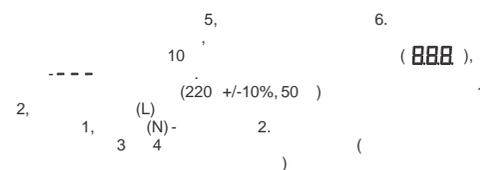

1.



RK

IP55 14254 ()

5 45
RK
35 (DIN-) RK
18


0,5 1,7

2.

()

2,5

3

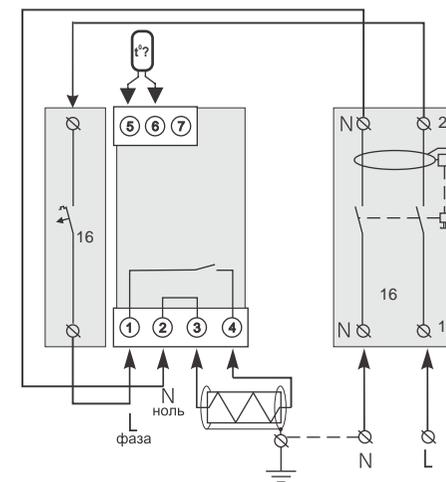

2.


(20)

2/3

() (3)



2*1,0

-2*1,5

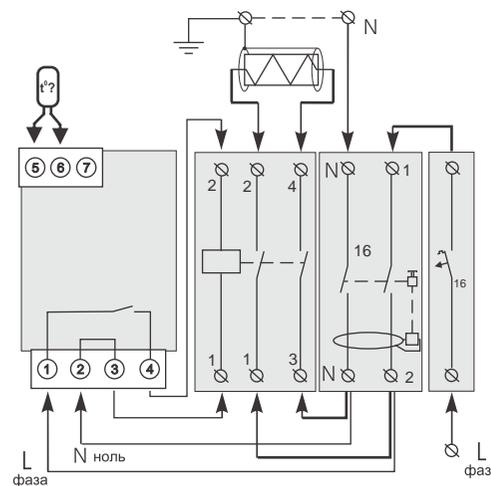


3.

30%.

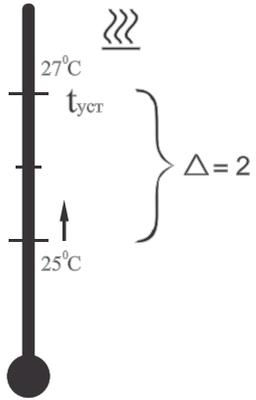

"+" (t)



"-"



3 4.



-25)

(40

3024603335-001-2003.

33.2-

1. " 24 ") (
2.)
3. 14
4. " " 14) (() ,) ,)
5.) (
6.)

27 25 .

t 27 - 2

25 , 27 .

(---).



2

3 4.

220 .

